



- Fulfills ingress protection class IP65 / IP67
- fulfills impact protection class 7
- outstanding capable for outdoor applications (UV reliability)
- capable for FO: r = 40mm

Technical Data

Number of jacks	2
protection class	IP65/67 (depending on IP housing of the plug)
IK protection class	7
color	black
cable entry	2 x PG16; 5,5 mm up to 8,0mm

Environmental characteristics


Operation temperature	-40°C up to +70°C
UV reliability	very good

Mechanical characteristics

material	aluminium
weight	708g

Drawing

Masse Dose IP65 148x98x81 leer 2PT6/T14

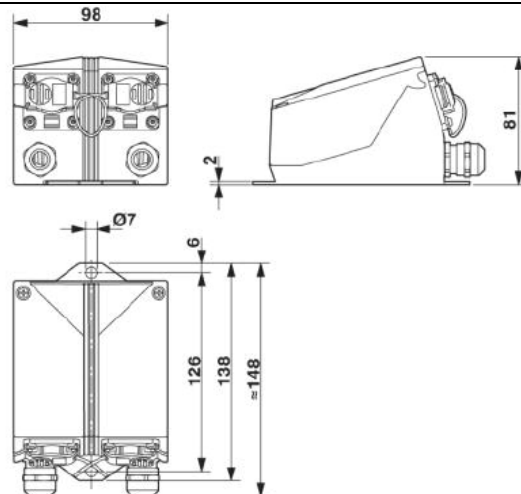

Order information

Outlet IP65-SM 148x98x81 empty 2P T6	1	510850
Outlet IP65-SM 148x98x81 empty 2P T14	1	510851

This document was prepared with the greatest possible care and reflects the current state of technology at the time of printing. Subject to corrections and technical changes.