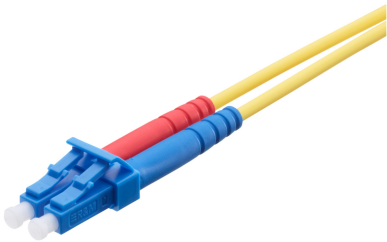


**Patch Cord LC-Duplex PC - LC-Duplex PC, blue/blue, G.652.D + G.657.A1, C/2, F8 2.0x4.1mm, 1 m**

1 pcs



**DESCRIPTION**

Both sides fitted with one LC-Duplex PC connector.  
 Connector color: blue.  
 Lever color: blue.  
 Fiber: SM E9/125 G.652.D/G.657.A1 (OS1, OS2).  
 Cable: F8 2.0x4.1 mm, yellow.

090.6512 / similar product

**TECHNICAL DATA**

DESCRIPTION	VALUE/VALUE RANGE
Standard / norm	LC connector acc. to IEC 61754-20
Protection class IP	IP 20
Connector class	connector
Protection class IP (A)	IP 20
Number of connectors (A)	1
Protection class IP (B)	IP 20
Number of connectors (B)	1
Cable type	Patch cord, polarity A-B
Jacket material	LSZH
Cable jacket characteristics	Cable, metal-free Zero-halogen Flame-retardant
Cable overall diameter	F8 2.0 x 4.1 mm (±0.15)
Connector type (A)	LC-Duplex
Polishing plug (A)	PC
Attenuation grade IL (A)	C
Return loss grade RL (A)	2
Connector color (A)	blue
Lever- / frame-coding (A)	Color
Lever color (A)	blue
Connector type (B)	LC-Duplex
Polishing plug (B)	PC

**Patch Cord LC-Duplex PC - LC-Duplex PC, blue/blue, G.652.D + G.657.A1, C/2, F8 2.0x4.1mm, 1 m**

1 pcs

DESCRIPTION	VALUE/VALUE RANGE
Attenuation grade IL (B)	C
Return loss grade RL (B)	2
Connector color (B)	blue
Lever- / frame-coding (B)	Color
Lever color (B)	blue
Fiber type	singlemode (SM)
Fiber class	G.652.D (OS2)
Conductor type	tight buffer
Fiber diameter	E9 / 125 µm
Patch cord type	duplex figure 8

**MECHANICAL DATA**

DESCRIPTION	VALUE/VALUE RANGE
Cable length	1.0 m / 3 ft 3 in
Color	yellow

Patch cord with LSZH jacket, F8 2.0x4.1 mm, yellow, singlemode G.652.D/G.657.A1 9/125 µm (OS1, OS2), length . Mounted on both sides with LC-Duplex connectors in acc. with IEC 61754-20. Zirconia (ceramic) ferrule with a PC polished endface geometry, connectors tuned in accordance with IEC 61755-3-1 and qualified in acc. with IEC 61753-1 for category U (uncontrolled environment). Blue connector housing (singlemode), blue duplex clip, material PC / UL 94 V-0, 1 x blue and 1 x red strain relief, material TPE / UL 94 V-0 and white plastic dust cover.

Optical specifications (random mated):

Performance acc. to IEC 61753-1 (Table A.12):

Insertion loss (IL) Grade C for 97% of the tested specimen: = 0.50 dB / typical = 0.25 dB


Return loss (RL) Grade 2: = 45 dB

Mechanical specifications:

Mating cycles: delta IL < 0.2 dB after 500 mating cycles



Pull-out force patch cord: = 100 N (per connector)

**OPTIONAL ACCESSORY**

FOTO	DESCRIPTION	PU	PRODUCT NO.
	Boot 90° R30	12 pcs	R505756






**Patch Cord LC-Duplex PC - LC-Duplex PC, blue/blue, G.652.D + G.657.A1, C/2, F8 2.0x4.1mm, 1 m**

1 pcs

FOTO	DESCRIPTION	PU	PRODUCT NO.
	Color Clip LC-Duplex Connector, green	12 pcs	R508098
	Color Clip LC-Duplex Connector, blue	12 pcs	R508104
	Color Clip LC-Duplex Connector, turquoise	12 pcs	R508100
	Color Clip LC-Duplex Connector, orange	12 pcs	R508097
	Color Clip LC-Duplex Connector, beige	12 pcs	R508105
	Color Clip LC-Duplex Connector, red	12 pcs	R508103

**Patch Cord LC-Duplex PC - LC-Duplex PC, blue/blue, G.652.D + G.657.A1, C/2, F8 2.0x4.1mm, 1 m**

1 pcs

FOTO	DESCRIPTION	PU	PRODUCT NO.
	Color Clip LC-Duplex Connector, yellow	12 pcs	R508102
	Color Clip LC-Duplex Connector, violet	12 pcs	R508101
	Color Clip LC-Duplex Connector, black	12 pcs	R508099
	Plug Guard LC-Duplex Connector	12 pcs	R508116
	R&MinteliPhy RFID clip pair LC-Duplex (10 pairs)	1 pcs	R809349