


**Patch Cord LC APC - LC APC, green/green,  
G.657.A2, C/1, Ø 3.0mm, 1 m**

1 pcs

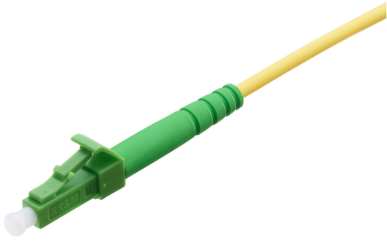

090.6514 / similar product

**TECHNICAL DATA**

DESCRIPTION	VALUE/VALUE RANGE
Standard / norm	LC connector acc. to IEC 61754-20
Protection class IP	IP 20
Connector class	connector
Protection class IP (A)	IP 20
Number of connectors (A)	1
Protection class IP (B)	IP 20
Number of connectors (B)	1
Cable type	Patch cord, polarity A-B
Jacket material	LSZH
Cable jacket characteristics	Cable, metal-free Zero-halogen Flame-retardant
Cable overall diameter	Ø 3.0 mm (±0.2)
Connector type (A)	LC
Polishing plug (A)	APC 8°
Attenuation grade IL (A)	C
Return loss grade RL (A)	1
Connector color (A)	green
Lever- / frame-coding (A)	Color
Lever color (A)	green
Connector type (B)	LC
Polishing plug (B)	APC 8°

**Patch Cord LC APC - LC APC, green/green,  
G.657.A2, C/1, Ø 3.0mm, 1 m**

1 pcs

DESCRIPTION	VALUE/VALUE RANGE
Attenuation grade IL (B)	C
Return loss grade RL (B)	1
Connector color (B)	green
Lever- / frame-coding (B)	Color
Lever color (B)	green
Fiber type	singlemode (SM)
Fiber class	G.657.A1, A2 + B2 (OS1, OS2)
Conductor type	tight buffer
Fiber diameter	E9 / 125 µm
Patch cord type	simplex

**MECHANICAL DATA**

DESCRIPTION	VALUE/VALUE RANGE
Cable length	1.0 m / 3 ft 3 in
Color	yellow