


# LKSM-FRHF

## Fire-resistant armoured power and control cable 0,6/1kV

### DESIGN:

**STANDARDS:** IEC 60092-353, design

<b>1. Conductor</b>	- stranded copper conductor 1,0–10mm <sup>2</sup> - stranded copper conductor 16–300mm <sup>2</sup> - tinned stranded copper conductor on request	IEC 60228, class 2 IEC 60228, class 5 (Flex)
<b>2. Insulation</b>	- Mica tape - XLPE plastic	IEC 60092-360
<b>3. Cabling / bedding</b>	- cabling with optional fillers or dummy cores to obtain symmetrical and round construction	
<b>4. Armour</b>	- copper wire braid, coverage > 90% - tinned copper wire braid on request	IEC 60092-350
<b>5. Rip cord</b>	- rip cord for conductors from 16mm <sup>2</sup>	
<b>6. Sheath</b>	- polyolefine plastic, SHF1, standard colour orange - on request thermosetting polyolefine, SHF2, standard colour black - other colours on request	IEC 60092-360

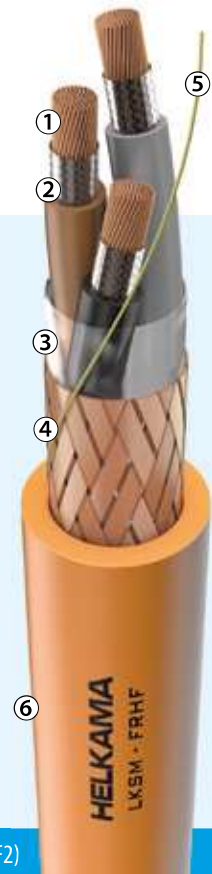

● Flame-retardant ● Fire-resistant ● Halogen-free ● Low smoke emission ● Oil resistant (only SHF2)

**Application:** For fixed installation in most areas and on open deck in ships and offshore units. If the cable is exposed to direct sun light protective covering or cable with black outer sheath is recommended.

### Main characteristics

Rated voltage	<b>AC 0,6/1kV (1,2kV)</b> <b>DC 0,9/1,5kV</b> (if voltage to earth does not exceed 0,9kV)
Flame-retardant	<b>IEC 60332-1-2</b> -test for single insulated wire and cable <b>IEC 60332-3-22</b> -test for bunched wires and cables, category A
Fire-resistant	<b>IEC 60331-1 or IEC 60331-2</b>
Halogen-free	<b>IEC 60754</b> series
Smoke emission	<b>IEC 61034</b> series
Oil resistance (only SHF2)	<b>IEC 60811-404</b> conditions according to 60092-360/SHF2
<b>Temperature rating:</b>	Maximum conductor temperature <b>+ 90 °C</b> Fixed installation <b>-40 °C to +80 °C</b> Minimum recommended installation temperature <b>-15 °C</b>

For details see general information section