


ALL DIMENSION ARE IN "mm"

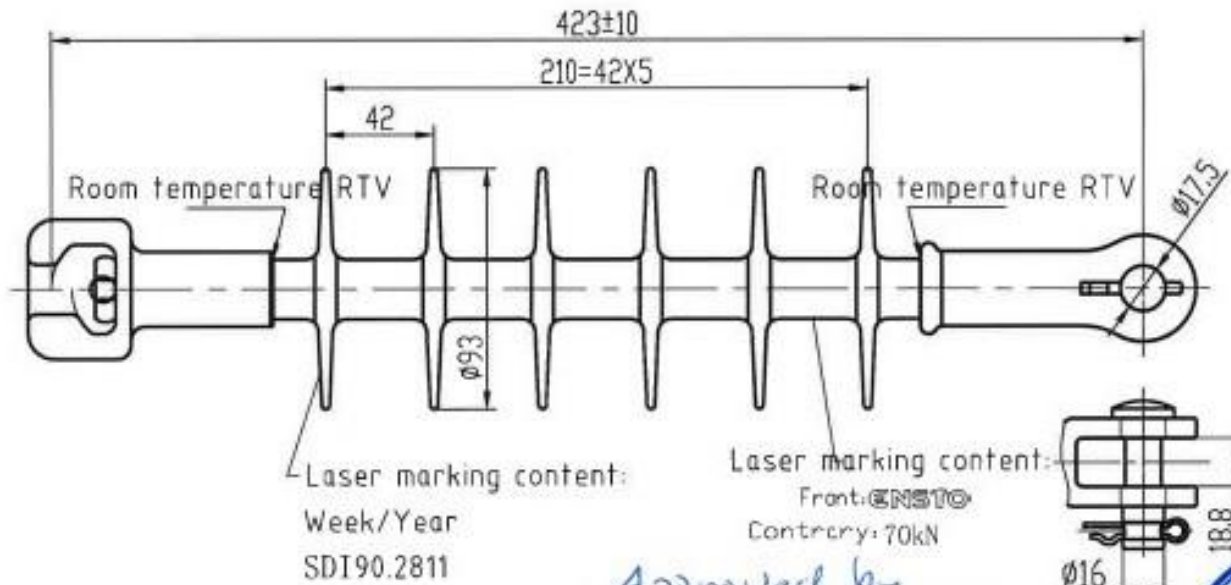

Approved by  
21/05/2019

GUARANTEED TECHNICAL PARTICULARS:  
 APPLICABLE STANDARDS : IEC 61109  
 1.RATED VOLTAGE: 36kV;  
 2.MINIMUM CREEPAGE DISTANCE: 613mm;  
 3.SPECIFIED MECHANICAL LOAD(TENSILE): 70kN;  
 4. SECTION LENGTH: 423± 10mm;  
 5.MIN 1 MINUTE POWER FREQUENCY WITHSTAND VOLTAGE(WET): 90kV;  
 6.MIN LIGHTNING IMPULSE WITHSTAND VOLTAGE:171kV;  
 7.COLOR: Grey.

5	Socket		1	Forged steel		
4	Core		1			
3	Weathersheds			Silicone rubber		
2	Pin		1	Stainless steel		
1	Clevis		1	Forged steel		
NO.	DESCRIPTION	REMARK	QTY	MATERIAL	WEIGHT	CODE
Composite Tensile Insulator				ASSEMBLAGE		 FXB-36/70-423
DESIGNED	Chen Juan	2019.05.21	WEIGHT		DRG.NO: X307190518SC1-1	
DRAWN	Chen Juan	2019.05.21	SCALE	NTS		
CHECKED	Yin Peng	2019.05.21	The 1st of 1 piece			
APPROVED	Yin Peng	2019.05.21				