

**Bases**  
**Type: SKSr**  
 for cabinets UCH

**Design:**

Pluggable plastic base, to assemble without screws, made from glass-fibre reinforced recycled polyester SMC with swinging upper base front plate secured over sash fastener and freely selectable cable mounting bar assembly position.

**Product standard:** DIN 43 629 Teil 2

**Mechanical strength:** EN 60439-5 / A1

**Executions:**

SKSr: With base plate  
 SKSuR: With lateral U-profile connector made of aluminium

**Surface:** All parts smooth

**Accessories:**

Mounting terminal fixtures (with adjustable fixing slide lock):

BI 02-60 Ø 60 mm without tension relief  
 BIZ 03-60 Ø 60 mm with tension relief


Front plate system:

FP-Ms Front plate with swinging middle part  
 FP-KaVa Front plate with closable openings adjustable in diameter (number dependent of the width of the base).

Base extensions possible in stages of 300mm. The base can be supplied fully closed.

q.v. separate brochure "fairground"

Technical characteristics q.v. "Polyester SMC - basic material"

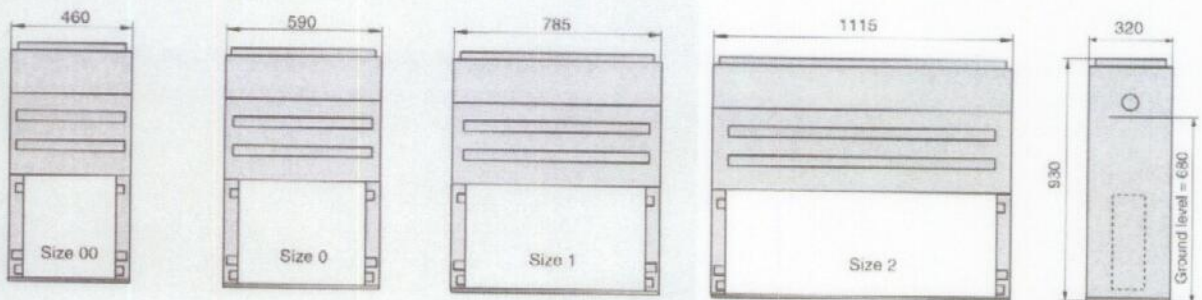

| DIN size | a    | b    | c    | d    |
|----------|------|------|------|------|
| 00       | 460  | 410  | 356  | 360  |
| 0        | 590  | 545  | 486  | 495  |
| 1        | 785  | 740  | 681  | 690  |
| 2        | 1115 | 1070 | 1011 | 1020 |

Subject to modifications