

SIRIUS, COMPACT STARTER, DIRECT STARTER 690 V, 110 ... 240 V AC/DC, 50 ... 60 HZ, 1 ... 4 A, IP20, CONNECTION MAIN CIRCUIT: PLUGGABLE, WITHOUT TERMINALS, CONNECTION AUXILIARY CIRCUIT: SPRING-LOADED TERMINAL



| | |
|-----------------------|-----------------|
| Product brand name | SIRIUS |
| Product designation | compact starter |
| Design of the product | direct starter |

| General technical data | |
|---|--|
| Product function | |
| • Control circuit interface to parallel wiring | Yes |
| Product extension | |
| • Auxiliary switch | Yes |
| Insulation voltage | |
| • rated value | 690 V |
| Degree of pollution | 3 |
| Surge voltage resistance rated value | 6 000 V |
| maximum permissible voltage for safe isolation | |
| • between auxiliary and auxiliary circuit | 250 V |
| • between control and auxiliary circuit | 300 V |
| • between main and auxiliary circuit | 400 V |
| Protection class IP | IP20 |
| Vibration resistance | f= 4 ... 5.8 Hz, d= 15 mm; f= 5.8 ... 500 Hz, a= 20 m/s ² ; 10 cycles |
| Mechanical service life (switching cycles) | |

| | |
|--|---|
| • of the main contacts typical | 10 000 000 |
| • of auxiliary contacts typical | 10 000 000 |
| • of the signaling contacts typical | 10 000 000 |
| Electrical endurance (switching cycles) of auxiliary contacts | |
| • at DC-13 at 6 A at 24 V typical | 30 000 |
| • at AC-15 at 6 A at 230 V typical | 200 000 |
| Type of assignment | continuous operation according to IEC 60947-6-2 |
| Equipment marking | |
| • acc. to DIN EN 61346-2 | Q |
| • acc. to DIN EN 81346-2 | Q |

| | |
|----------------------------|----------------|
| Ambient conditions | |
| Ambient temperature | |
| • during operation | -20 ... +60 °C |
| • during storage | -55 ... +80 °C |
| • during transport | -55 ... +80 °C |

| | |
|---|---------------------|
| Main circuit | |
| Number of poles for main current circuit | 3 |
| Adjustable pick-up value current of the current-dependent overload release | 1 ... 4 A |
| Formula for making capacity limit current | 12 x I _e |
| Formula for interruption capacity limit current | 10 x I _e |
| Mechanical power output for 4-pole AC motor | |
| • at 400 V rated value | 1.5 kW |
| • at 500 V rated value | 2.2 kW |
| • at 690 V rated value | 3 kW |
| Operating voltage | |
| • at AC-3 rated value maximum | 690 V |
| Operating current | |
| • at AC at 400 V rated value | 4 A |
| • at AC-43 | |
| — at 400 V rated value | 3.6 A |
| — at 500 V rated value | 3.9 A |
| — at 690 V rated value | 3.8 A |
| No-load switching frequency | 3 600 1/h |
| Operating frequency | |
| • at AC-41 acc. to IEC 60947-6-2 maximum | 750 1/h |
| • at AC-43 acc. to IEC 60947-6-2 maximum | 250 1/h |

| | |
|---------------------------------------|-------|
| Control circuit/ Control | |
| Type of voltage | AC/DC |
| Control supply voltage 1 at AC | |

| | |
|--|---------------|
| <ul style="list-style-type: none"> • at 50 Hz • at 60 Hz | 110 ... 240 V |
| Control supply voltage 1 | |
| <ul style="list-style-type: none"> • at DC | 110 ... 240 V |
| Holding power | |
| <ul style="list-style-type: none"> • at AC maximum • at DC maximum | 6 W 5.1 W |

Auxiliary circuit

| | |
|--|--------|
| Number of NC contacts | |
| <ul style="list-style-type: none"> • for auxiliary contacts | 1 |
| Number of NO contacts | |
| <ul style="list-style-type: none"> • for auxiliary contacts • of instantaneous short-circuit trip unit for signaling contact | 1 1 |
| Number of CO contacts | |
| <ul style="list-style-type: none"> • of the current-dependent overload release for signaling contact | 1 |
| Operating current of auxiliary contacts at AC-12 maximum | 10 A |
| Operating current of auxiliary contacts at DC-13 | |
| <ul style="list-style-type: none"> • at 250 V | 0.27 A |

Protective and monitoring functions

| | |
|--|----------------------------|
| Trip class | CLASS 10 and 20 adjustable |
| Off-delay time | 50 ms |
| Operational short-circuit current breaking capacity (Ics) | |
| <ul style="list-style-type: none"> • at 400 V • at 500 V rated value • at 690 V rated value | 53 kA 3 kA 3 kA |

UL/CSA ratings

| | |
|--|---|
| Full-load current (FLA) for three-phase AC motor | |
| <ul style="list-style-type: none"> • at 480 V rated value • at 600 V rated value | 4 A 4 A |
| Yielded mechanical performance [hp] | |
| <ul style="list-style-type: none"> • for three-phase AC motor <ul style="list-style-type: none"> — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value | 0.75 hp 0.75 hp 2 hp 3 hp |
| Contact rating of auxiliary contacts according to UL | contacts 21-22, 13-14, 43-44 Q600 / A600, contacts 77-78 R300 / B300, contacts 95-96-98 R300 / D300 |

| Short-circuit protection | |
|--|--|
| Product function Short circuit protection | Yes |
| Design of the fuse link | |
| <ul style="list-style-type: none"> • for short-circuit protection of the auxiliary switch required | fuse gL/gG: 10 A |
| <ul style="list-style-type: none"> • for short-circuit protection of the signaling switch of the short-circuit release required | 6A gL/gG/400V |
| <ul style="list-style-type: none"> • for short-circuit protection of the signaling switch of the overload release required | 4A gL/gG/400V |
| Installation/ mounting/ dimensions | |
| Mounting position | any |
| <ul style="list-style-type: none"> • recommended | vertical, on horizontal standard mounting rail |
| Mounting type | screw and snap-on mounting |
| Height | 191 mm |
| Width | 45 mm |
| Depth | 165 mm |
| Connections/Terminals | |
| Product function | |
| <ul style="list-style-type: none"> • removable terminal for main circuit | Yes |
| <ul style="list-style-type: none"> • removable terminal for auxiliary and control circuit | Yes |
| Type of electrical connection | |
| <ul style="list-style-type: none"> • for main current circuit | plug-in without terminals |
| <ul style="list-style-type: none"> • for auxiliary and control current circuit | spring-loaded terminals |
| Type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for main contacts <ul style="list-style-type: none"> — solid | 2x (1.5 ... 6 mm ²), 1x 10 mm ² |
| <ul style="list-style-type: none"> — finely stranded with core end processing | 2x (1.5 ... 6 mm ²) |
| <ul style="list-style-type: none"> — finely stranded without core end processing | 2x (1.5 ... 6 mm ²) |
| <ul style="list-style-type: none"> • at AWG conductors for main contacts | 2x (16 ... 10), 1x 8 |
| Type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid | 2x (0.25 ... 1.5 mm ²) |
| <ul style="list-style-type: none"> — finely stranded with core end processing | 2x (0.25 ... 1.5 mm ²) |
| <ul style="list-style-type: none"> — finely stranded without core end processing | 2x (0.25 ... 1.5 mm ²) |
| <ul style="list-style-type: none"> • at AWG conductors for auxiliary contacts | 2x (24 ... 16) |
| Safety related data | |
| B10 value | |
| <ul style="list-style-type: none"> • with high demand rate acc. to SN 31920 | 3 000 000 |
| Proportion of dangerous failures | |

| | |
|---|---------|
| <ul style="list-style-type: none"> with low demand rate acc. to SN 31920 with high demand rate acc. to SN 31920 | 40 % |
| Failure rate [FIT] | |
| <ul style="list-style-type: none"> with low demand rate acc. to SN 31920 | 100 FIT |
| T1 value for proof test interval or service life acc. to IEC 61508 | 20 y |

| Communication/ Protocol | |
|--|----|
| Product function Bus communication | No |
| Protocol is supported | |
| <ul style="list-style-type: none"> IO-Link protocol | No |

| Electromagnetic compatibility | |
|---|----------------------------|
| Field-bound parasitic coupling acc. to IEC 61000-4-3 | 10 V/m |
| Electrostatic discharge acc. to IEC 61000-4-2 | 8 kV |
| Conducted HF-interference emissions acc. to CISPR11 | 150 kHz ... 30 MHz Class A |
| Field-bound HF-interference emission acc. to CISPR11 | 30 ... 1000 MHz Class A |

| Supply voltage | |
|--|----|
| Supply voltage required Auxiliary voltage | No |

| Certificates/approvals | | |
|---------------------------------|------------|--|
| General Product Approval | EMC | Functional Safety/Safety of Machinery |



| Declaration of Conformity | Test Certificates | Marine / Shipping | | | |
|---------------------------|--|-------------------|--|--|--|
| EG-Konf. | Type Test Certificates/Test Report | | | | |

| Marine / Shipping | other |
|-------------------|---|
| RINA | RMRS |
| | Environmental Confirmations |
| | Confirmation |

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3RA6120-2CP33>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RA6120-2CP33>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA6120-2CP33>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RA6120-2CP33&lang=en

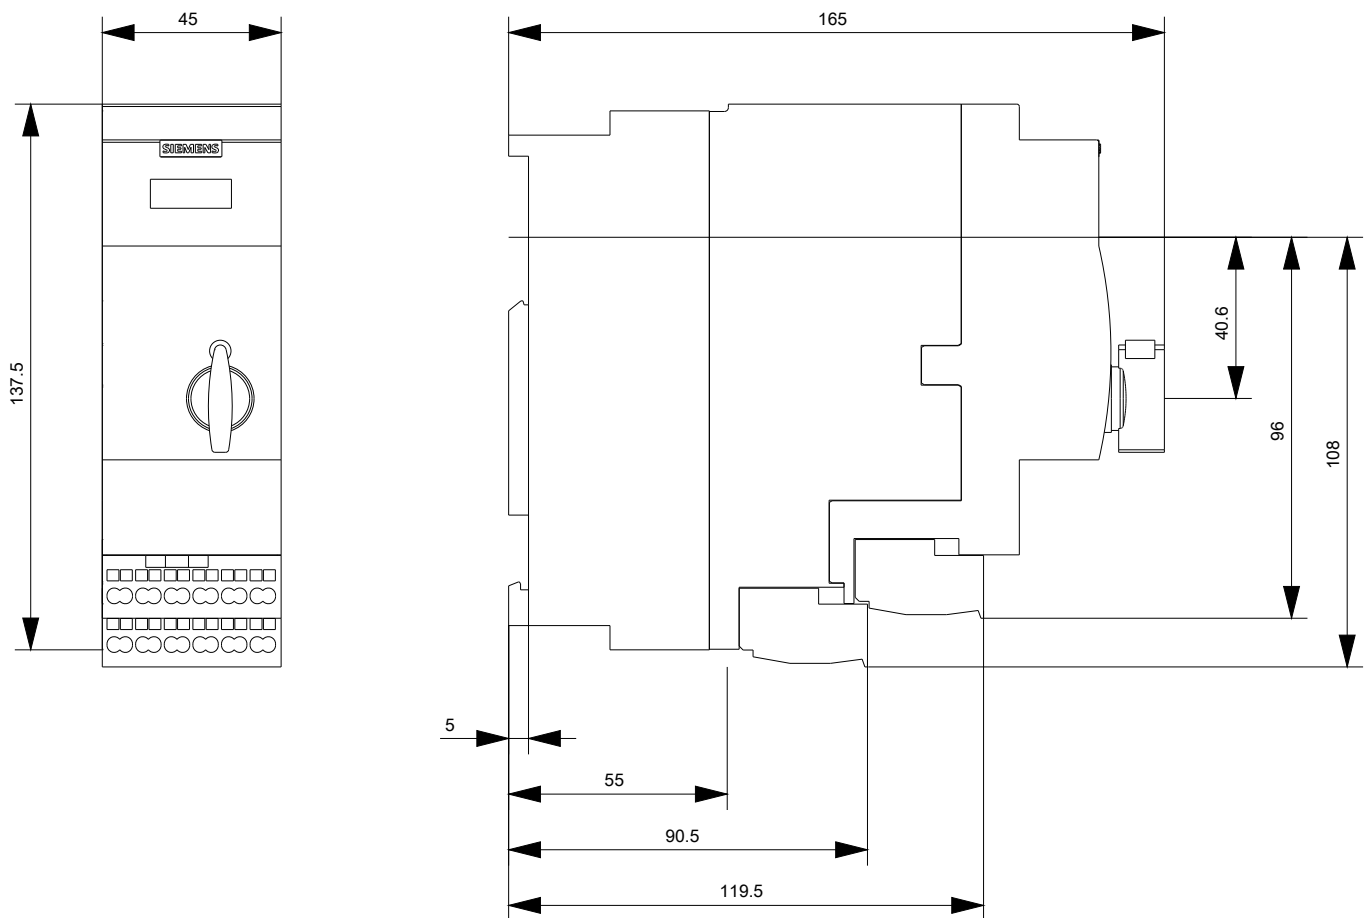

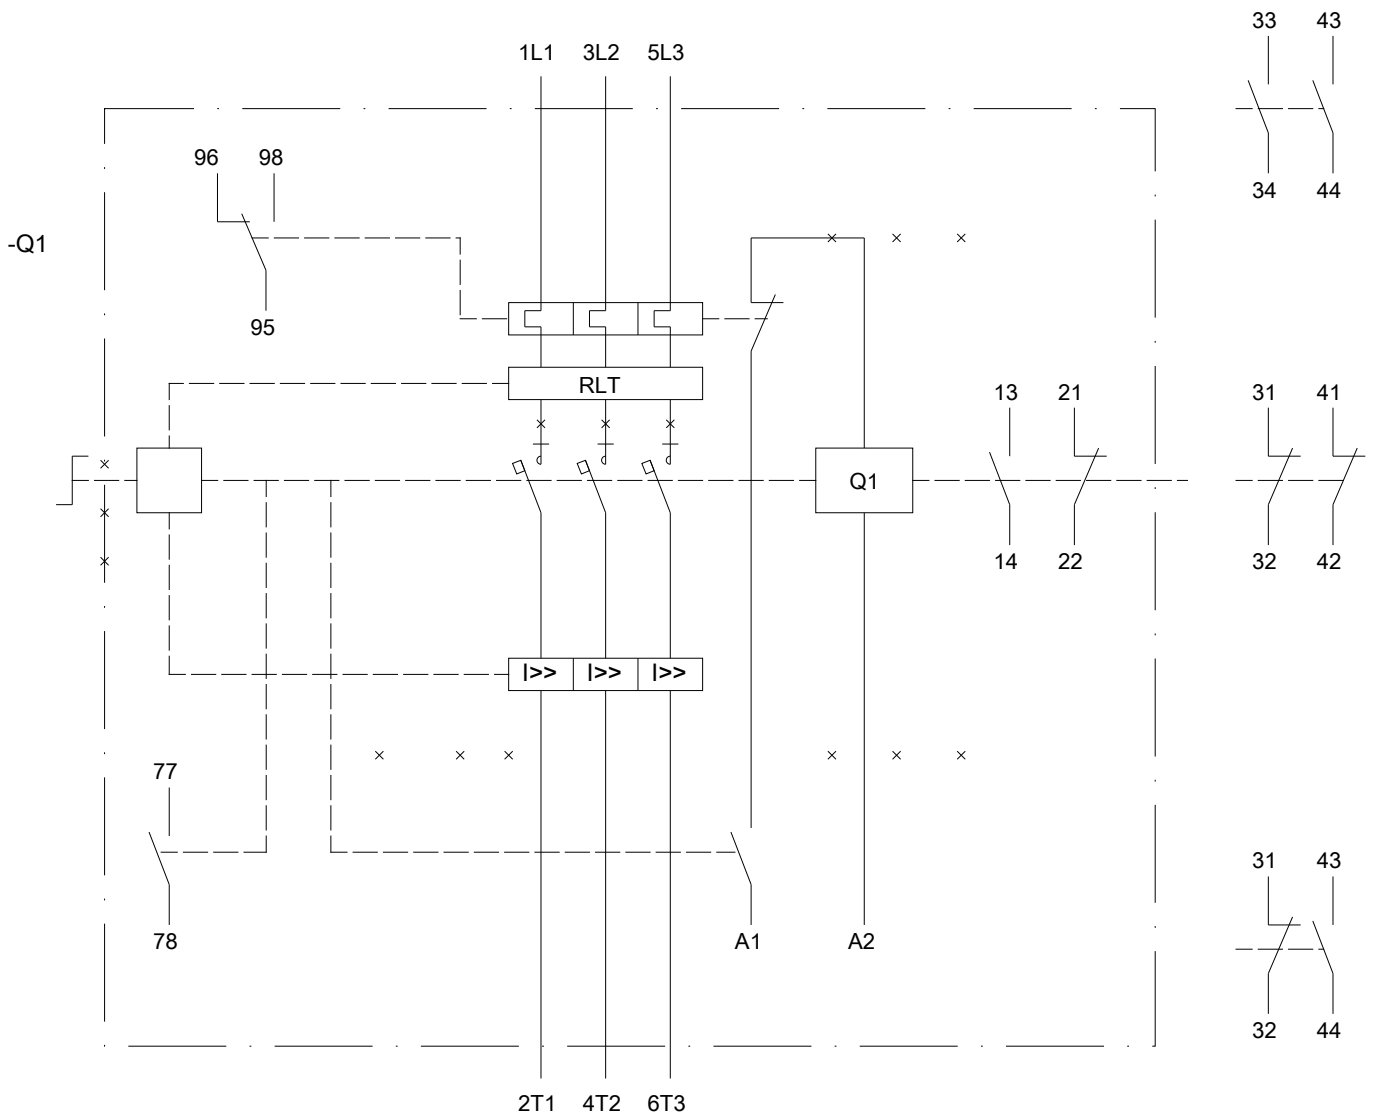

last modified:

07/14/2017