

SURGE SUPPRESSOR, DIODE COMBINATION, DC 24 V, FOR MOTOR CONTACTORS SZ S0,



General technical data:		
product brandname		SIRIUS
Product designation		surge suppressor
Size of contactor		S0
Design of the surge suppressor		with diode assemblies
Ambient temperature		
• during storage	°C	-40 ... +80
• during operation	°C	-25 ... +60
Control circuit/ Control:		
Type of voltage of the control supply voltage		DC
Control supply voltage 1		
• at DC		
— rated value	V	24
Installation/ mounting/ dimensions:		
Mounting position		any
Mounting type		clip-on
Width	mm	30
Height	mm	19

Depth	mm	12
-------	----	----

Certificates/ approvals:

Certificate of suitability CE / UL / CSA / CCC

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
--------------------------	---------------------------	-------------------	-------------------



[Special Test Certificate](#)



Shipping Approval



other Railway

[Confirmation](#)

[Environmental Confirmations](#)



[Vibration and Shock](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT2926-1ER00>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT2926-1ER00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT2926-1ER00&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT2926-1ER00&lang=en)

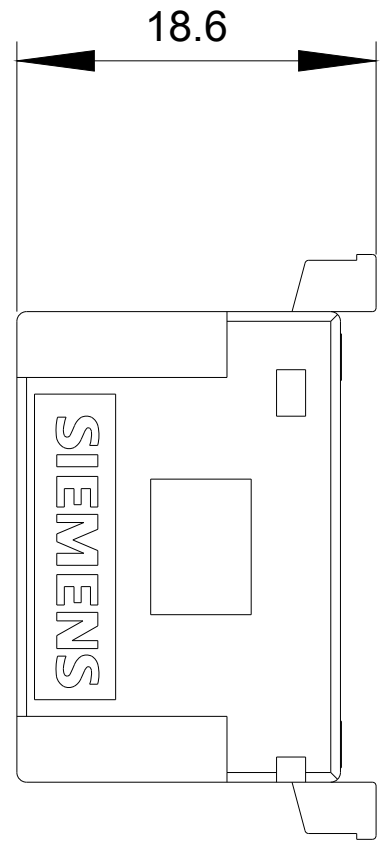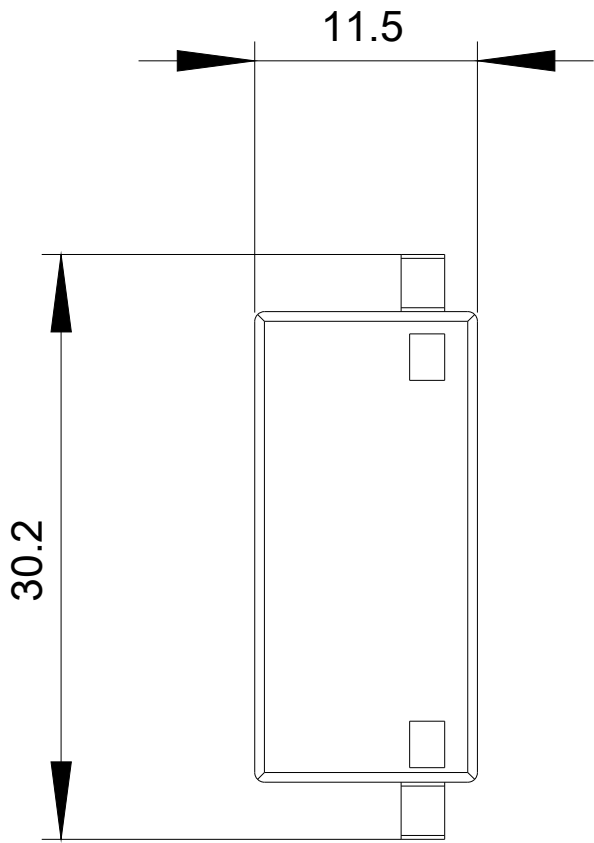

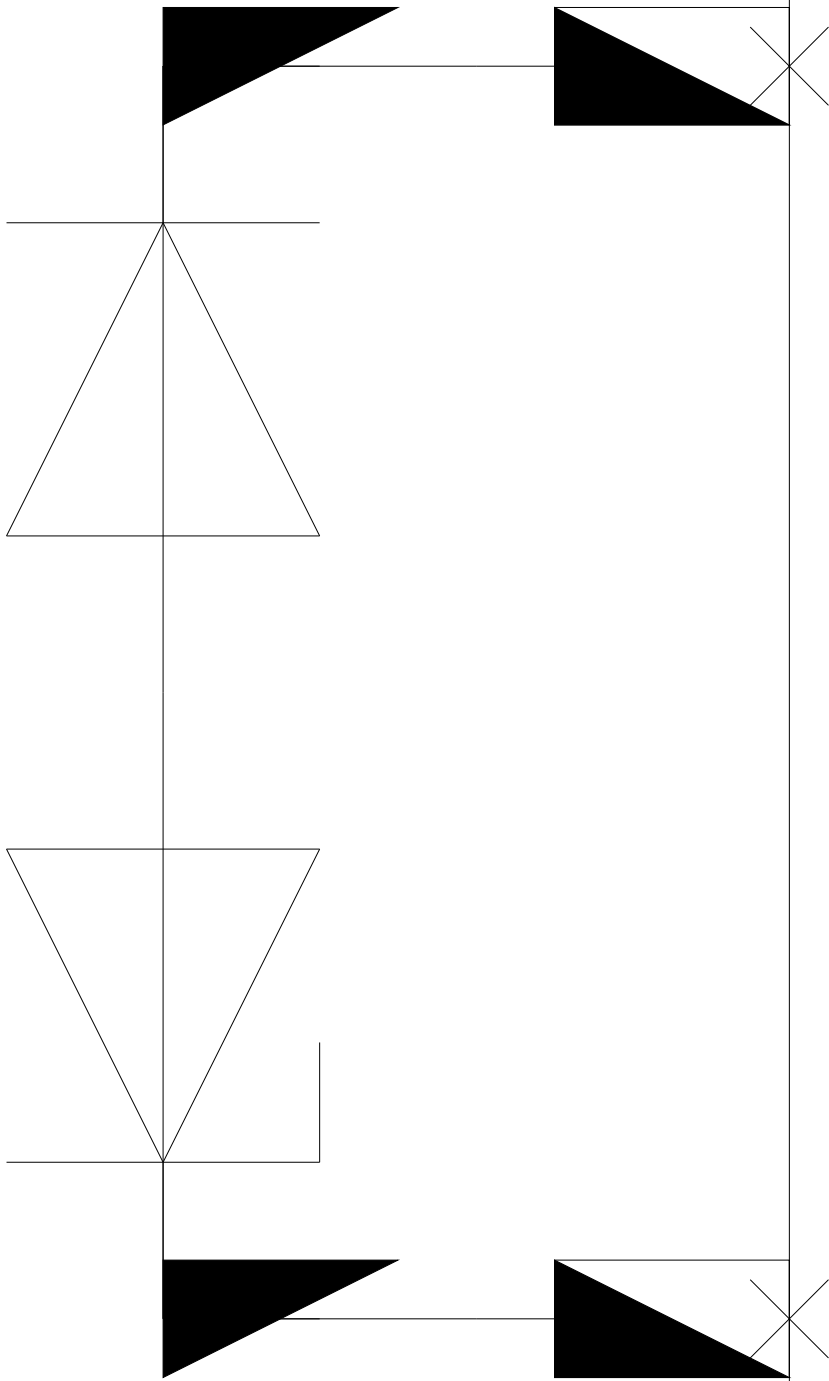

last modified:

06/20/2017