

SUPPORT FOR STAND-ALONE INST. FOR
3RU21/3RB30/3RB31/3RR2 SIZE S0, STAND-ALONE
INSTALLATION MAIN CIRCUIT: SPRING-T. TERM.
AUXILIARY CIRCUIT: --

General technical data:

product brandname		SIRIUS
Product designation		individual mount
Size of overload relay		S0
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +70

Installation/ mounting/ dimensions:

Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
Width	mm	45
Height	mm	114
Depth	mm	76


Connections/ Terminals:

<ul style="list-style-type: none"> — Type of connectable conductor cross-sections for main contacts finely stranded — with core end processing 		1 ... 6 mm ²
--	--	-------------------------

- Type of connectable conductor cross-sections at AWG conductors
— for main contacts

1x (18 ... 8)

Certificates/ approvals:

General Product Approval			Declaration of Conformity	Test Certificates	
 CCC	 CSA	 UL		 EG-Konf.	
Special Test Certificate					
Test Certificates	Shipping Approval				
Type Test Certificates/Test Report	 ABS	 BUREAU VERITAS	 LRS	 PRS	 RINA
Shipping Approval	other				
 RMRS	Environmental Confirmations		Confirmation		

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RU2926-3AC01>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RU2926-3AC01>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RU2926-3AC01&lang=en

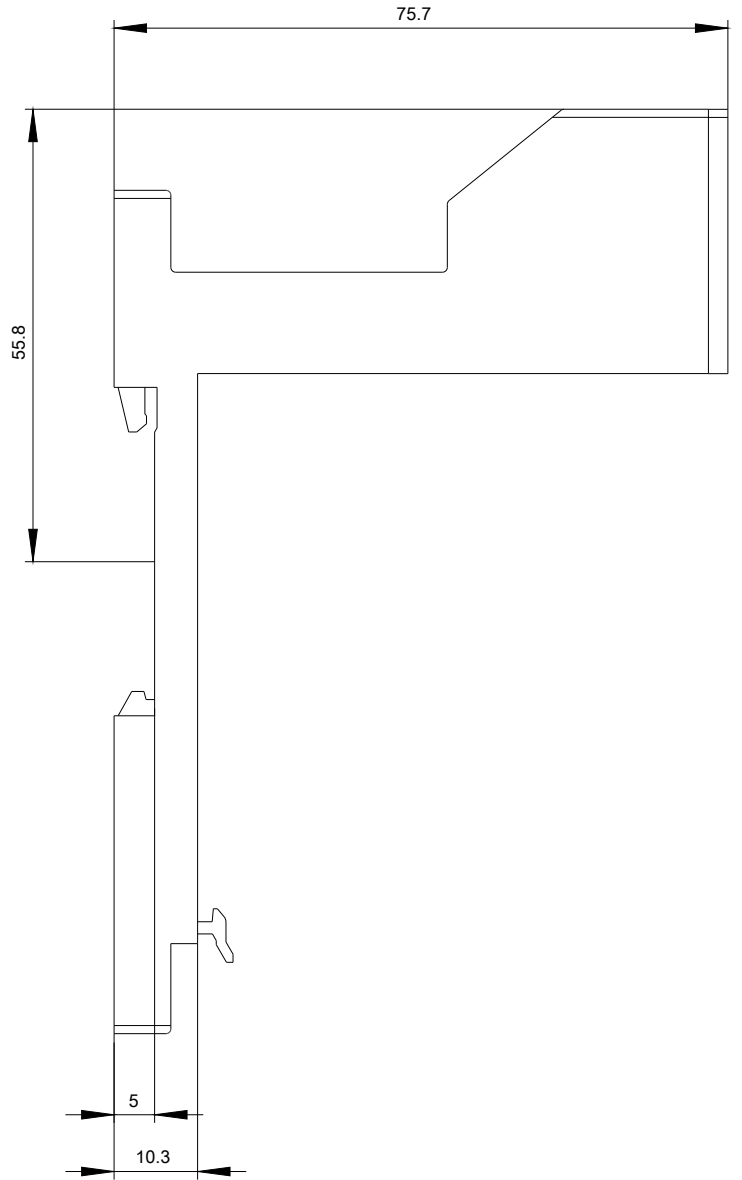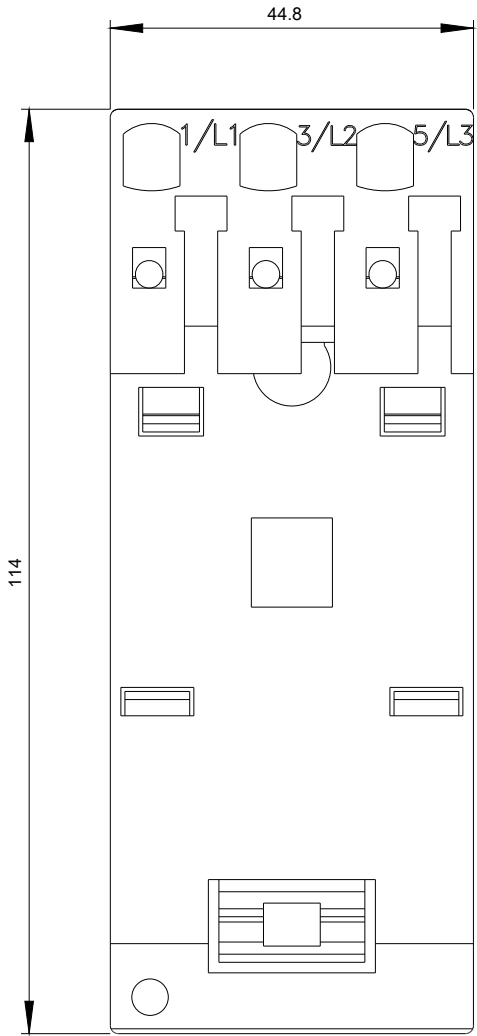

last modified:

07/01/2017