

CIRCUIT BREAKER, SIZE S2, FOR MOTOR PROTECTION, CLASS 10, A-RELEASE 35...45A, N-RELEASE 650A, SCREW TERMINAL, STANDARD BREAKING CAPACITY



Figure similar

|                          |                      |
|--------------------------|----------------------|
| product brandname        | SIRIUS               |
| Product designation      | Circuit breaker      |
| Design of the product    | For motor protection |
| Product type designation | 3RV2                 |

| General technical data  |       |
|---|-------|
| Size of the circuit-breaker   | S2    |
| Size of contactor can be combined company-specific                        | S2    |
| Product extension   |       |
| • Auxiliary switch  | Yes   |
| Power loss [W] total typical  | 17 W  |
| Insulation voltage with degree of pollution 3 rated value                 | 690 V |
| Surge voltage resistance rated value                                      | 6 kV  |
| maximum permissible voltage for safe isolation                            |       |
| • in networks with grounded star point between main and auxiliary circuit | 400 V |
| • in networks with grounded star point between main and auxiliary circuit | 400 V |

|   |  |
|---|--|
| <b>Protection class IP</b>                        |  |
| • on the front                                    | IP20   |
| • of the terminal                                 | IP00   |
| <b>Mechanical service life (switching cycles)</b> |  |
| • of the main contacts typical                    | 50 000   |
| • of auxiliary contacts typical                   | 50 000   |
| <b>Electrical endurance (switching cycles)</b>    |  |
| • typical   | 50 000   |
| <b>Protection against electrical shock</b>        | finger-safe when touched vertically from front acc. to IEC 60529 |
| Equipment marking acc. to DIN EN 81346-2          | Q  |

#### Ambient conditions

|                                 |                |
|---------------------------------|----------------|
| <b>Ambient temperature</b>      |                |
| • during operation              | -20 ... +60 °C |
| • during storage                | -50 ... +80 °C |
| • during transport              | -50 ... +80 °C |
| <b>Temperature compensation</b> | -20 ... +60 °C |

#### Main circuit

|   |              |
|---|--------------|
| <b>Number of poles for main current circuit</b>                                   | 3            |
| <b>Adjustable pick-up value current of the current-dependent overload release</b> | 35 ... 45 A  |
| <b>Operating voltage</b>  |              |
| • rated value   | 690 V        |
| • at AC-3 rated value maximum   | 690 V        |
| <b>Operating frequency rated value</b>  | 50 ... 60 Hz |
| <b>Operating current rated value</b>  | 45 A         |
| <b>Operating current</b>  |              |
| • at AC-3   |              |
| — at 400 V rated value  | 45 A         |
| <b>Operating power</b>  |              |
| • at AC-3   |              |
| — at 230 V rated value  | 11 000 W     |
| — at 400 V rated value  | 22 000 W     |
| — at 500 V rated value  | 30 000 W     |
| — at 690 V rated value  | 37 000 W     |
| <b>Operating frequency</b>  |              |
| • at AC-3 maximum   | 15 1/h       |

#### Protective and monitoring functions

|                           |          |
|---------------------------|----------|
| <b>Product function</b>   |          |
| • Ground fault detection  | No       |
| • Phase failure detection | Yes      |
| <b>Trip class</b>         | CLASS 10 |

|  |                                  |
|--|----------------------------------|
| <b>Design of the overload release</b>  | thermal                          |
| <b>Operational short-circuit current breaking capacity (Ics) at AC</b>   |                                  |
| <ul style="list-style-type: none"> <li>• at 240 V rated value</li> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>                         | 100 A<br>30 kA<br>5 kA<br>2 kA   |
| <b>Maximum short-circuit current breaking capacity (Icu)</b>   |                                  |
| <ul style="list-style-type: none"> <li>• at AC at 240 V rated value</li> <li>• at AC at 400 V rated value</li> <li>• at AC at 500 V rated value</li> <li>• at AC at 690 V rated value</li> </ul> | 100 kA<br>65 kA<br>10 kA<br>4 kA |

### UL/CSA ratings

|   |   |
|---|---|
| <b>Full-load current (FLA) for three-phase AC motor</b>   |   |
| <ul style="list-style-type: none"> <li>• at 480 V rated value</li> <li>• at 600 V rated value</li> </ul>  | 45 A<br>45 A                                      |
| <b>Yielded mechanical performance [hp]</b>  |   |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor               <ul style="list-style-type: none"> <li>— at 110/120 V rated value</li> <li>— at 230 V rated value</li> </ul> </li> <li>• for three-phase AC motor               <ul style="list-style-type: none"> <li>— at 200/208 V rated value</li> <li>— at 220/230 V rated value</li> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul> | 3 hp<br>10 hp<br>15 hp<br>15 hp<br>40 hp<br>50 hp |

### Short-circuit protection

|  |                                   |
|--|-----------------------------------|
| <b>Product function Short circuit protection</b>   | Yes                               |
| <b>Design of the short-circuit trip</b>  | magnetic                          |
| <b>Design of the fuse link for IT network for short-circuit protection of the main circuit</b>                           |                                   |
| <ul style="list-style-type: none"> <li>• at 240 V</li> <li>• at 400 V</li> <li>• at 500 V</li> <li>• at 690 V</li> </ul> | none required<br>125<br>100<br>80 |

### Installation/ mounting/ dimensions

|                          |  |
|--------------------------|--|
| <b>Mounting position</b> | any  |
| <b>Mounting type</b>     | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 |
| <b>Height</b>            | 140 mm   |
| <b>Width</b>             | 55 mm  |
| <b>Depth</b>             | 149 mm   |

| Required spacing   |  |
|--|--|
| <ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul> | <ul style="list-style-type: none"> <li>0 mm</li> <li>0 mm</li> <li>50 mm</li> <li>50 mm</li> <li>0 mm</li> <li>0 mm</li> <li>0 mm</li> <li>50 mm</li> <li>10 mm</li> <li>50 mm</li> <li>0 mm</li> <li>0 mm</li> <li>50 mm</li> <li>50 mm</li> <li>10 mm</li> </ul> |

## Connections/Terminals

|  |  |
|--|--|
| <b>Product function</b> <ul style="list-style-type: none"> <li>• removable terminal for auxiliary and control circuit</li> </ul>   | No   |
| <b>Type of electrical connection</b> <ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>  | screw-type terminals   |
| <b>Arrangement of electrical connectors for main current circuit</b>   | Top and bottom   |
| <b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG conductors for main contacts</li> </ul> | <ul style="list-style-type: none"> <li>2x (1 ... 25 mm<sup>2</sup>), 1x (1 ... 35 mm<sup>2</sup>)</li> <li>2x (1 ... 16 mm<sup>2</sup>), 1x (1 ... 25 mm<sup>2</sup>)</li> <li>2x (18 ... 3), 1x (18 ... 2)</li> </ul> |
| <b>Tightening torque</b> <ul style="list-style-type: none"> <li>• for main contacts with screw-type terminals</li> </ul>   | 3 ... 4.5 N·m  |
| <b>Design of screwdriver shaft</b>   | Diameter 5 to 6 mm   |

## Safety related data

|   |  |
|---|--|
| <b>B10 value</b> <ul style="list-style-type: none"> <li>• with high demand rate acc. to SN 31920</li> </ul>   | 5 000  |
| <b>Proportion of dangerous failures</b> <ul style="list-style-type: none"> <li>• with low demand rate acc. to SN 31920</li> <li>• with high demand rate acc. to SN 31920</li> </ul> | <ul style="list-style-type: none"> <li>50 %</li> <li>50 %</li> </ul> |

|   |        |
|---|--------|
| <b>Failure rate [FIT]</b><br>• with low demand rate acc. to SN 31920      | 50 FIT |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b> | 10 y   |
| <b>Display version</b><br>• for switching status                          | Handle |

### Certificates/approvals

|                                 |                                  |                          |
|---------------------------------|----------------------------------|--------------------------|
| <b>General Product Approval</b> | <b>Declaration of Conformity</b> | <b>Test Certificates</b> |
|---------------------------------|----------------------------------|--------------------------|



CCC



CSA



UL



EG-Konf.

[Special Test Certificate](#)

|                          |                          |
|--------------------------|--------------------------|
| <b>Test Certificates</b> | <b>Shipping Approval</b> |
|--------------------------|--------------------------|

[Type Test Certificates/Test Report](#)



ABS



LRS



PRS



RINA



RMRS

|              |                |
|--------------|----------------|
| <b>other</b> | <b>Railway</b> |
|--------------|----------------|

[Environmental Confirmations](#)

[Confirmation](#)

[Miscellaneous](#)

[Vibration and Shock](#)

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2031-4VA10>

**Cax online generator**




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2031-4VA10>


**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2031-4VA10>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2031-4VA10&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2031-4VA10&lang=en)

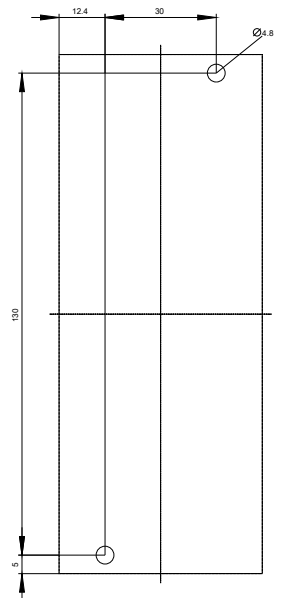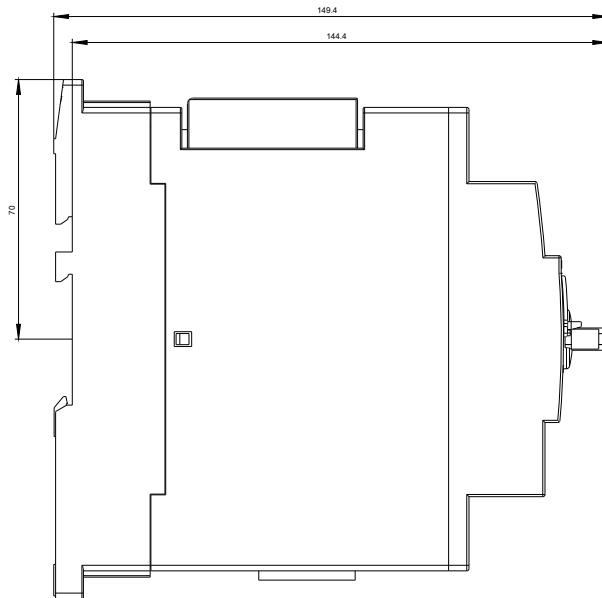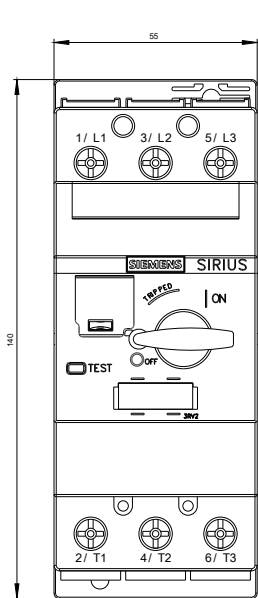

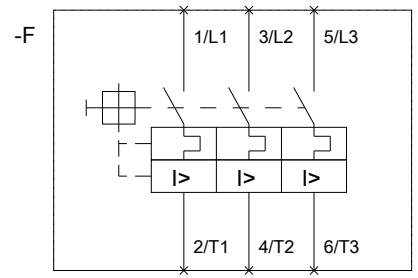

last modified:

06/20/2017