


CABLE CONNECTOR SIZE S00 SPRING-L.
CONNECTION



General technical data:



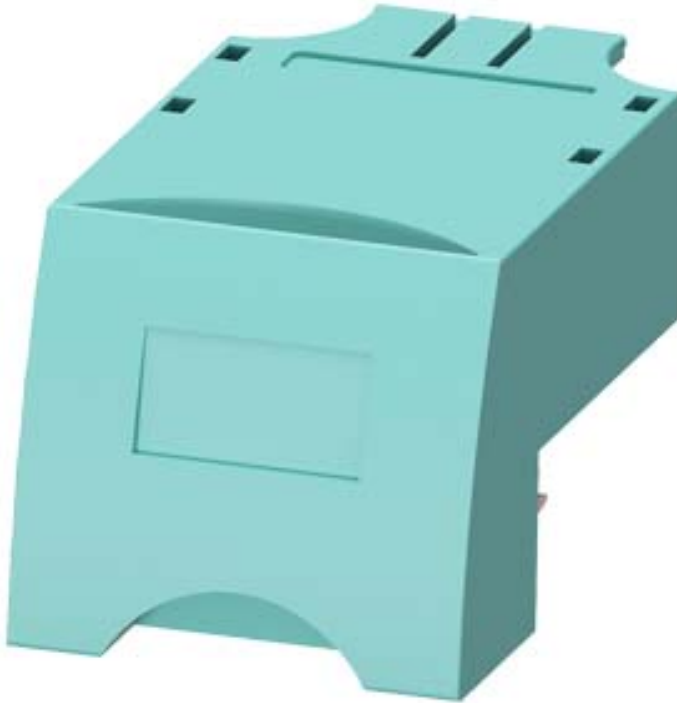


product brandname		SIRIUS
Product designation		Connection plug
Design of the product		Size S00
Size of the circuit-breaker		S00
Protection class IP on the front		IP20
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +60
Ampacity maximum	A	16





Installation/ mounting/ dimensions:


Width	mm	44.8
Height	mm	40.2
Depth	mm	79.6

Certificates/ approvals:

Certificate of suitability		CE / UL / CSA / CCC
----------------------------	--	---------------------

General Product Approval			Test Certificates	Shipping Approval	
 CSA	 UL		Special Test Certificate	 ABS	 BUREAU VERITAS

Shipping Approval				other	
 LRS	 PRS	 RINA	 RMRS	Environmental Confirmations	Confirmation

other	Railway
 VDE	Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2917-5AA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2917-5AA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2917-5AA00&lang=en

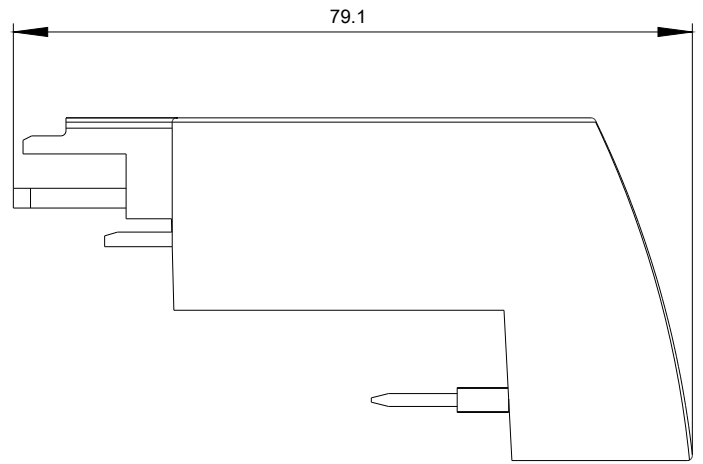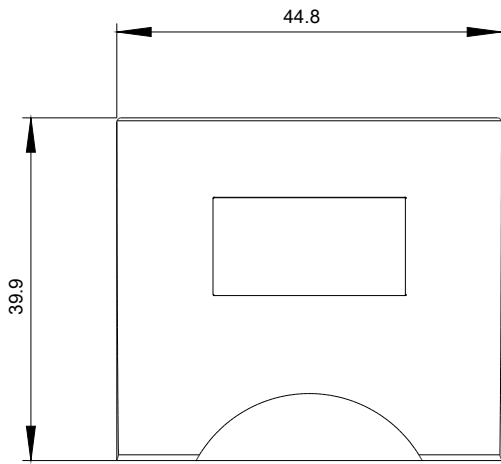

last modified:

05/19/2017