


PHASE BARRIERS INCR. CLEAR. AND CREEPAGE  
DIST. FOR SIZE: S00/S0



General technical data:



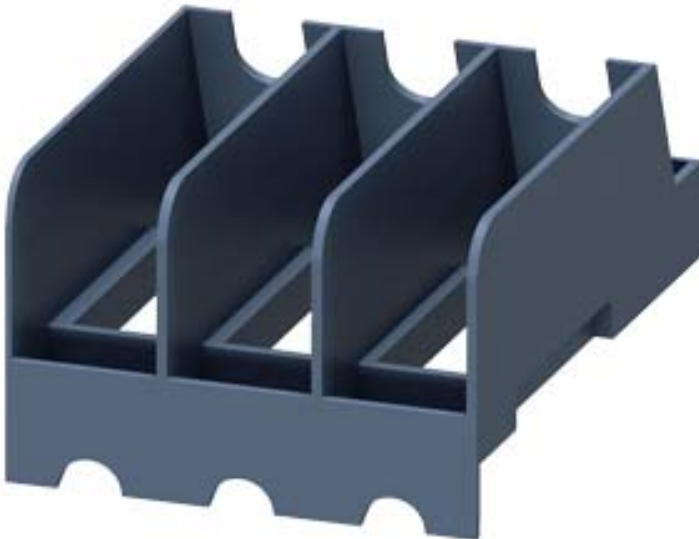

product brandname		SIRIUS
Product designation		phase barrier
Design of the product		phase barrier for 3RV2
Ambient temperature		
• during operation	°C	-20 ... +70
• during storage	°C	-50 ... +80





Installation/ mounting/ dimensions:

Mounting type		clip-on
Width	mm	44.8
Height	mm	29.3
Depth	mm	60.6

Certificates/ approvals:

Certificate of suitability		CE / UL / CSA / CCC
----------------------------	--	---------------------

Declaration of Conformity	Test Certificates	Shipping Approval
 EG-Konf.	<a href="#">Type Test Certificates/Test Report</a> <a href="#">Special Test Certificate</a>	 ABS  BUREAU VERITAS  LRS

Shipping Approval	other
 PRS  RINA  RMRS	<a href="#">Environmental Confirmations</a> <a href="#">Confirmation</a>  VDE

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrymall>

**Cax online generator**



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2928-1K>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2928-1K>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2928-1K&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2928-1K&lang=en)

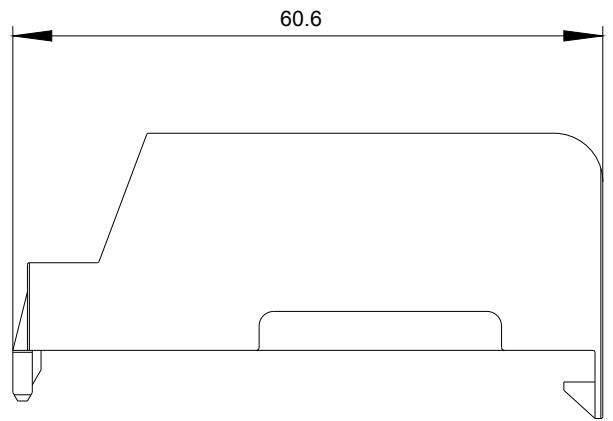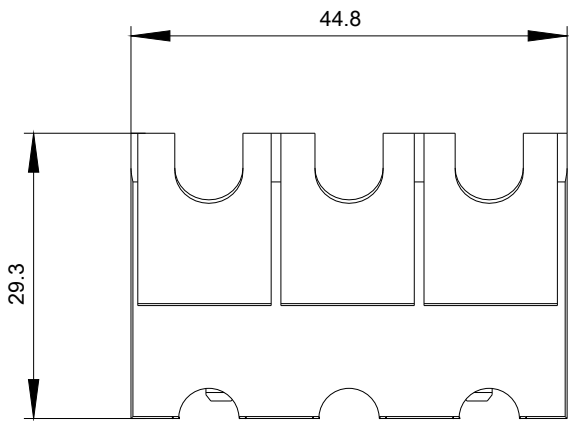

last modified:

06/20/2017