



SIRIUS SOFT STARTER, S12, 280 A, 160 KW/400 V, 40 DEG., 200-460 V AC, 230 V AC, SCREW TERMINALS

| General technical data | | |
|--|--|--------------|
| product brandname | | SIRIUS |
| <ul style="list-style-type: none">Product equipment Integrated bypass contact system | | Yes |
| <ul style="list-style-type: none">Product feature Thyristors | | Yes |
| Product function | | |
| <ul style="list-style-type: none">Intrinsic device protection | | Yes |
| <ul style="list-style-type: none">motor overload protection | | Yes |
| <ul style="list-style-type: none">Evaluation of thermistor motor protection | | No |
| <ul style="list-style-type: none">External reset | | Yes |
| <ul style="list-style-type: none">Adjustable current limitation | | Yes |
| <ul style="list-style-type: none">Inside-delta circuit | | No |
| Product component Motor brake output | | No |
| Equipment marking acc. to DIN EN 61346-2 | | Q |
| Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750 | | G |
| Power Electronics | | |
| Product designation | | Soft starter |

| | | |
|---|----|-------------|
| Operating current | | |
| • at 40 °C rated value | A | 280 |
| • at 50 °C rated value | A | 248 |
| • at 60 °C rated value | A | 215 |
| Mechanical power output for three-phase motors | | |
| • at 230 V | | |
| — at standard circuit at 40 °C rated value | W | 90 000 |
| • at 400 V | | |
| — at standard circuit at 40 °C rated value | W | 160 000 |
| Yielded mechanical performance [hp] for three-phase AC motor at 200/208 V at standard circuit at 50 °C rated value | hp | 75 |
| Operating frequency rated value | Hz | 50 ... 60 |
| Relative negative tolerance of the operating frequency | % | -10 |
| Relative positive tolerance of the operating frequency | % | 10 |
| Operating voltage at standard circuit rated value | V | 200 ... 460 |
| Relative negative tolerance of the operating voltage at standard circuit | % | -15 |
| Relative positive tolerance of the operating voltage at standard circuit | % | 10 |
| Minimum load [% of IM] | % | 20 |
| Adjustable motor current for motor overload protection minimum rated value | A | 130 |
| Continuous operating current [% of I_e] at 40 °C | % | 115 |
| Power loss [W] at operating current at 40 °C during operation typical | W | 90 |

| | | |
|---|----|-----|
| Control electronics | | |
| Type of voltage of the control supply voltage | | AC |
| Control supply voltage frequency 1 rated value | Hz | 50 |
| Control supply voltage frequency 2 rated value | Hz | 60 |
| Relative negative tolerance of the control supply voltage frequency | % | -10 |
| Relative positive tolerance of the control supply voltage frequency | % | 10 |
| Control supply voltage 1 at AC | | |
| • at 50 Hz rated value | V | 230 |
| • at 60 Hz rated value | V | 230 |
| Relative negative tolerance of the control supply voltage at AC at 60 Hz | % | -15 |
| Relative positive tolerance of the control supply voltage at AC at 60 Hz | % | 10 |
| Display version for fault signal | | red |

Mechanical data

| | | |
|---|----|--|
| Size of engine control device | | S12 |
| Width | mm | 160 |
| Height | mm | 230 |
| Depth | mm | 278 |
| Mounting type | | screw fixing |
| Mounting position | | With additional fan: With vertical mounting surface +/- 90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/- 10° rotatable, with vertical mounting surface +/- 10° t |
| Required spacing with side-by-side mounting | | |
| • upwards | mm | 100 |
| • at the side | mm | 5 |
| • downwards | mm | 75 |
| Wire length maximum | m | 300 |
| Number of poles for main current circuit | | 3 |

Connections/Terminals

| | | |
|--|--|--|
| Type of electrical connection | | |
| • for main current circuit | | busbar connection |
| • for auxiliary and control current circuit | | screw-type terminals |
| Number of NC contacts for auxiliary contacts | | 0 |
| Number of NO contacts for auxiliary contacts | | 2 |
| Number of CO contacts for auxiliary contacts | | 1 |
| Type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point | | |
| • finely stranded with core end processing | | 70 ... 240 mm ² |
| • finely stranded without core end processing | | 70 ... 240 mm ² |
| • stranded | | 95 ... 300 mm ² |
| Type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point | | |
| • finely stranded with core end processing | | 120 ... 185 mm ² |
| • finely stranded without core end processing | | 120 ... 185 mm ² |
| • stranded | | 120 ... 240 mm ² |
| Type of connectable conductor cross-sections for main contacts for box terminal using both clamping points | | |
| • finely stranded with core end processing | | min. 2x 50 mm ² , max. 2x 185 mm ² |
| • finely stranded without core end processing | | min. 2x 50 mm ² , max. 2x 185 mm ² |
| • stranded | | max. 2x 70 mm ² , max. 2x 240 mm ² |
| Type of connectable conductor cross-sections at AWG conductors for main contacts for box terminal | | |
| • using the back clamping point | | 250 ... 500 kcmil |

| | | |
|--|--|--|
| <ul style="list-style-type: none"> • using the front clamping point • using both clamping points | | 3/0 ... 600 kcmil min. 2x 2/0, max. 2x 500 kcmil |
| Type of connectable conductor cross-sections for DIN cable lug for main contacts <ul style="list-style-type: none"> • finely stranded • stranded | | 50 ... 240 mm ² 70 ... 240 mm ² |
| Type of connectable conductor cross-sections for auxiliary contacts <ul style="list-style-type: none"> • solid • finely stranded with core end processing | | 2x (0.5 ... 2.5 mm ²) 2x (0.5 ... 1.5 mm ²) |
| Type of connectable conductor cross-sections at AWG conductors <ul style="list-style-type: none"> • for main contacts • for auxiliary contacts • for auxiliary contacts finely stranded with core end processing | | 2/0 ... 500 kcmil 2x (20 ... 14) 2x (20 ... 16) |

Ambient conditions

| | | |
|--|----------|---|
| Installation altitude at height above sea level | m | 5 000 |
| Environmental category <ul style="list-style-type: none"> • during transport acc. to IEC 60721 • during storage acc. to IEC 60721 • during operation acc. to IEC 60721 | | 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6 |
| Ambient temperature <ul style="list-style-type: none"> • during operation • during storage | °C °C | -25 ... +60 -40 ... +80 |
| Derating temperature | °C | 40 |
| Protection class IP | | IP00 |

Certificates/approvals

| | | |
|--------------------------|-----|--------------------------------|
| General Product Approval | EMC | For use in hazardous locations |
|--------------------------|-----|--------------------------------|



| | | | |
|---------------------------|-------------------|-------------------|-------|
| Declaration of Conformity | Test Certificates | Shipping Approval | other |
|---------------------------|-------------------|-------------------|-------|



[Special Test Certificate](#)



GL



LRS

[Environmental Confirmations](#)

[Confirmation](#)

UL/CSA ratings

| | | |
|--|----|-------------|
| Yielded mechanical performance [hp] for three-phase AC motor | | |
| <ul style="list-style-type: none"> • at 220/230 V <ul style="list-style-type: none"> — at standard circuit at 50 °C rated value • at 460/480 V <ul style="list-style-type: none"> — at standard circuit at 50 °C rated value | hp | 100 |
| | hp | 200 |
| Contact rating of auxiliary contacts according to UL | | B300 / R300 |

Further information

Simulation Tool for Soft Starters (STS)

<https://support.industry.siemens.com/cs/ww/en/view/101494917>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4074-6BB44>

Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4074-6BB44>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RW4074-6BB44>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW4074-6BB44&lang=en

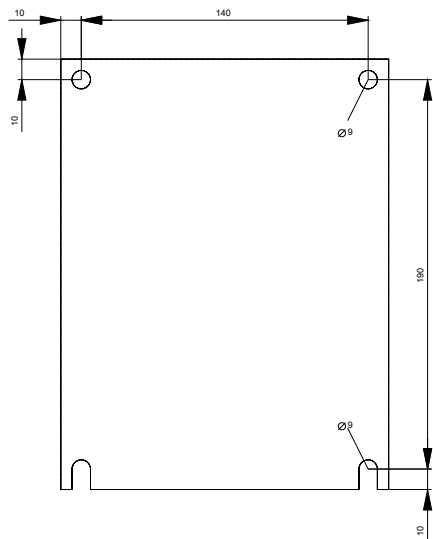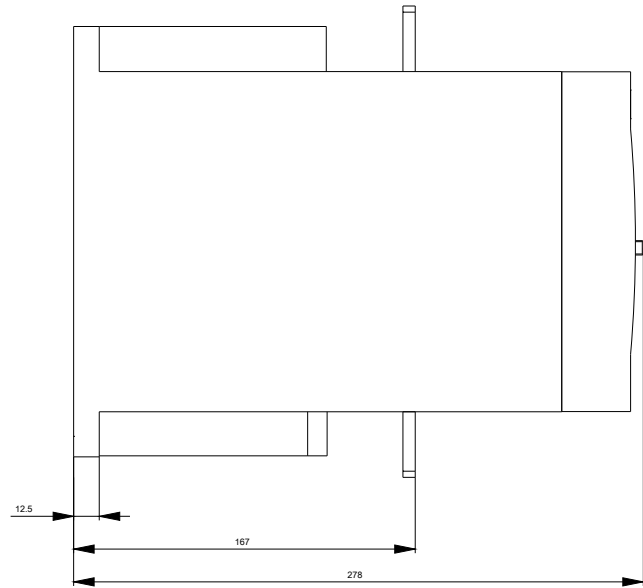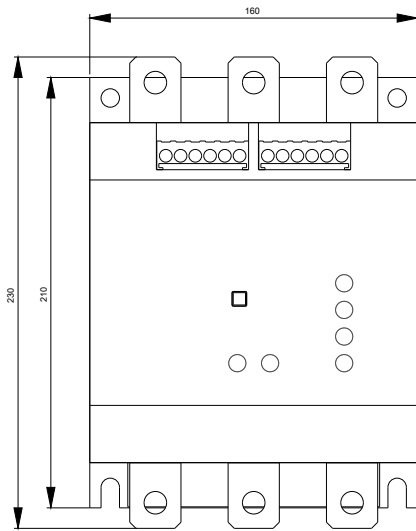

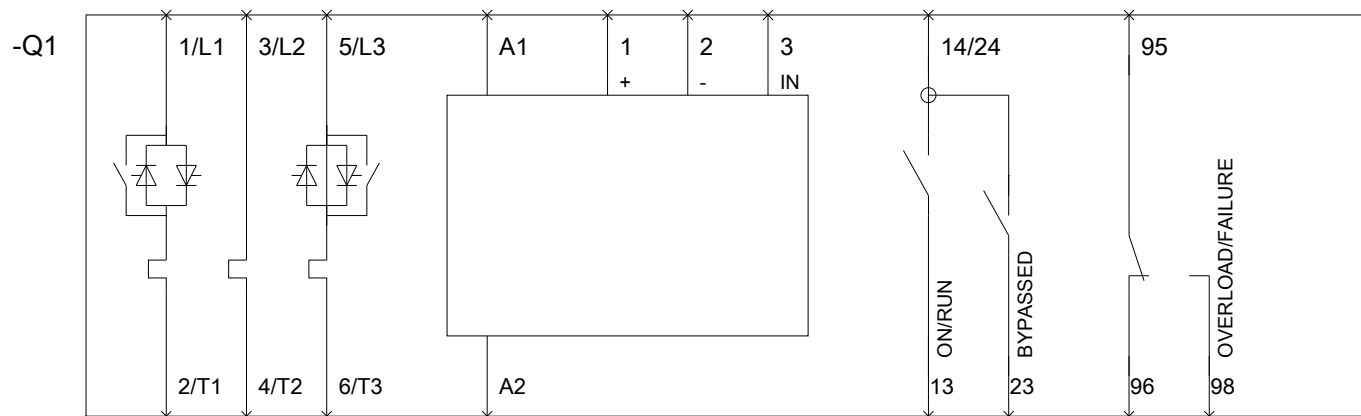

last modified:

07/20/2017