

SHUNT TRIP RELEASE DC 24-48V, F. LS-SW. 5SL4, 5SY, 5SP, RCBO 5SU1, RCD 5SV



Model	
Product brand name	SETRON
Product designation	Shunt trip
Design of the product	Mountable
Design of the product / factory mounted	No
Main circuit	
Operating voltage / rated value	230 V
Control current	
Type of voltage / of control voltage	AC/DC
Product details	
Product extension	shunt trip
<ul style="list-style-type: none"> • can be mounted 	residual current operated circuit breaker
Number	
Number of fault signal contacts	0
Number of NC contacts	2
Number of NO contacts	0
Number of CO contacts	0

Mechanical Design

Number of width units	1
Net weight	90 g
Equipment marking	KF
• acc. to DIN EN 81346-2	
Declaration of Conformity	other



EG-Konf.

[Environmental Confirmations](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3031>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3031>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3031

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

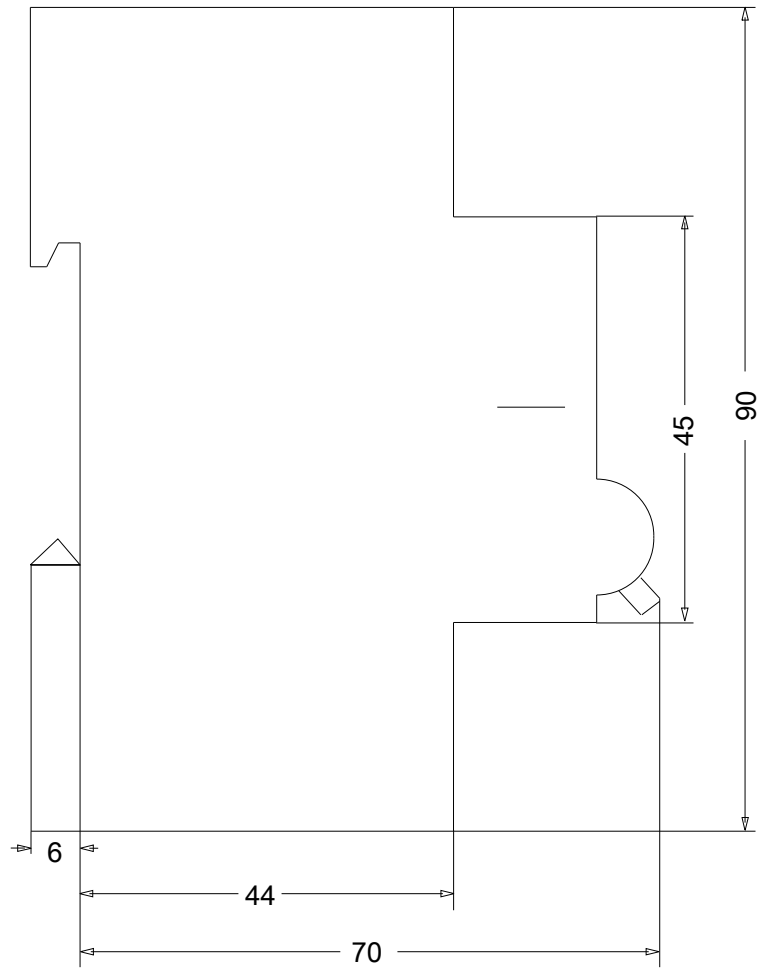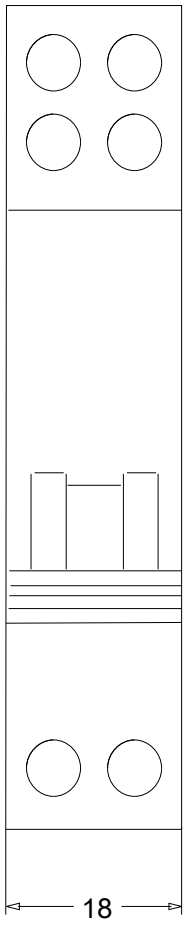

C2



C1

