



UNDER-VOLTAGE RELEASE F.MOUNT.,
F. LS-SWITCH T=70MM AC 230V,
WITH 2TERMINALS

Similar to image

Technical data:

Number of NC contacts		0
Number of change-over switches		0
Number of NO contacts		0
Design of the electrical connection		screw-type terminals
Switching function / slow-operating/instantaneous contact		No
Type of voltage / for operating		AC
Control supply voltage		
<ul style="list-style-type: none"> • at 50 Hz / at AC / rated value <ul style="list-style-type: none"> • minimum V 230 • maximum V 230 • at 60 Hz / at AC / rated value <ul style="list-style-type: none"> • minimum V 230 • maximum V 230 		
Suitability for use		
<ul style="list-style-type: none"> • circuit breaker • load switch 		No No
Suitability for integration		
<ul style="list-style-type: none"> • motor protection switch 		No

• overload relay

No

Certificates/approvals:

General Product Approval

Declaration of Conformity

other



GOST



EG-Konf.

[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<http://support.automation.siemens.com/WW/view/en/5ST3043/all>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3043

CAX-Online-Generator

<http://www.siemens.com/cax>

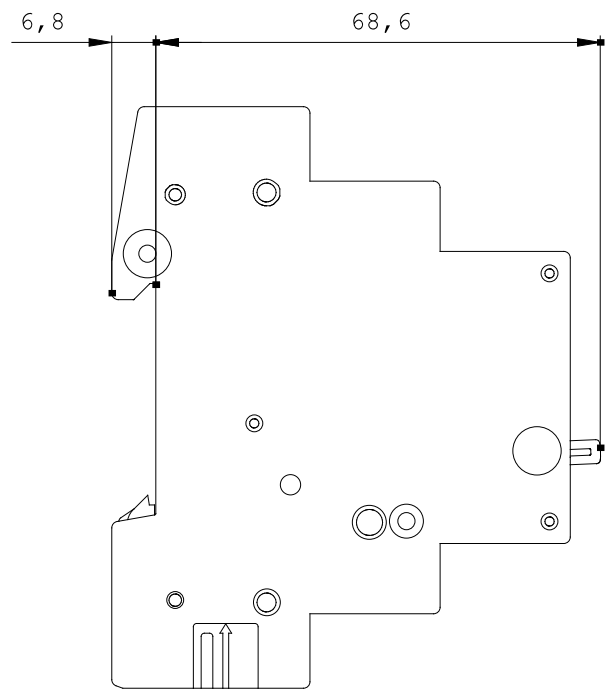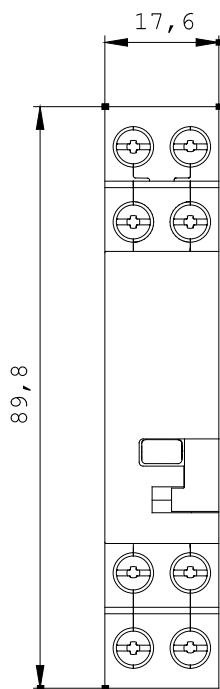

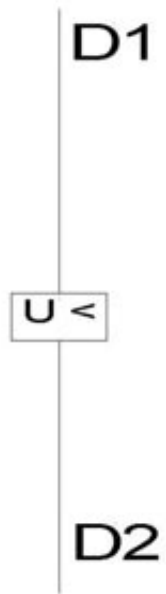

last change:

Mar 18, 2013