



UNDER-VOLTAGE RELEASE F.MOUNT.,  
F. LS-SWITCH T=70MM DC 24V,  
WITH 2TERMINALS

Similar to image

**Technical data:**

<b>Number of NC contacts</b>		0
<b>Number of change-over switches</b>		0
<b>Number of NO contacts</b>		0
<b>Design of the electrical connection</b>		screw-type terminals
<b>Switching function / slow-operating/instantaneous contact</b>		No
<b>Type of voltage / for operating</b>		DC
<b>Control supply voltage</b>		
• for DC / rated value		
• minimum	V	24
• maximum	V	24
<b>Suitability for use</b>		
• circuit breaker		No
• load switch		No
<b>Suitability for integration</b>		
• motor protection switch		No
• overload relay		No

**Certificates/approvals:**

General Product Approval	Declaration of Conformity	other
--------------------------	---------------------------	-------



[other](#)

[Environmental Confirmations](#)

**Further information:**

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/lowvoltage/mall>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**



<http://support.automation.siemens.com/WW/view/en/5ST3045/all>


**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3045](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3045)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

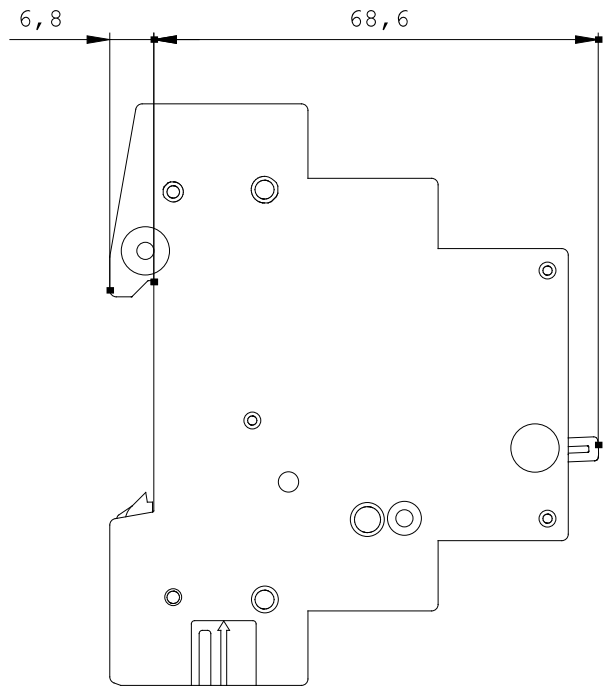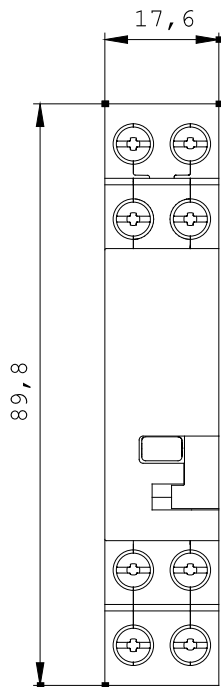

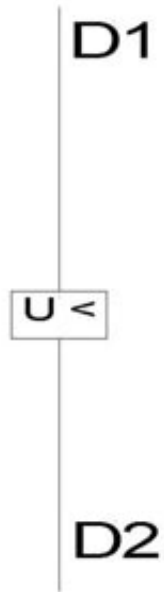

last change:

Mar 18, 2013