

PIN BUSBAR, 4PHASE 10SQMM, 1050MM, INSULATION GREY  
SLICEABLE FOR RCBO 2P (3MW) + AFDD

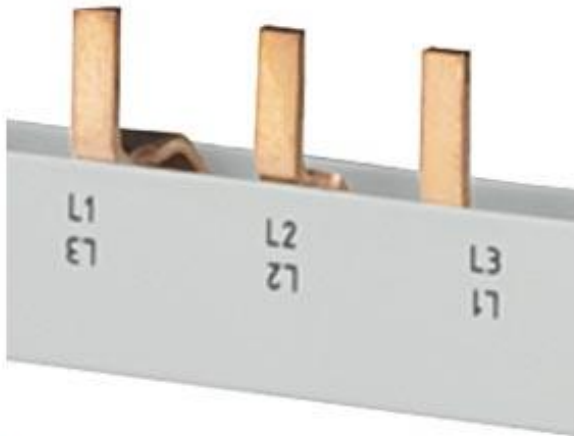


Figure similar

Model	
Product brand name	SETRON
Product designation	Pin busbar
Design of the product	4PH 10mm <sup>2</sup> , 60MW gray
Busbar design	laminated
General technical data	
Surface processing / tin-plated	No
Main circuit	
Operating current / rated value	63 A
Product details	
Product feature / flexible	Yes
Mechanical Design	
Width	20 mm
Length	1 050 mm
Thickness / of busbar	17 mm
Material / of the busbar	SF-Cu F 24



EG-Konf.

Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3746-5>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3746-5>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3746-5](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3746-5)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>