

ALPHA-ZS QUICK-MOUNTING SET FOR  
TELECOMMUNICATION,  
H=1050,  
W=250 WITH PERF. SHEET AND INSERT. NU

**Technical data:**

<b>Height</b>	mm	1,050
<b>Width</b>	mm	250
<b>Number of multi-rate tariff device locations</b>		0
<b>Number of meter locations</b>		0
<b>Number of rows</b>		0
<b>Number of pitch units for width</b>		0
<b>Design of the meter field</b>		electronic domestic meter
<b>Product component</b>		
• wiring		No
• Mounting plate		No
<b>Product feature / of the lower terminal compartment</b>		with busbar 4-pole
<b>Design of the cap/top cover</b>		without cover

**Certificates/approvals:**

**General Product Approval**

**Test Certificates**



[Type Test  
Certificates/Test  
Report](#)

**Further information:**

---

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

---

**Industry Mall (Online ordering system)**

<http://www.siemens.com/lowvoltage/mall>

---

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/8GS4016-2/all>

---

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=8GS4016-2](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8GS4016-2)

---

**CAX-Online-Generator**

<http://www.siemens.com/cax>

---

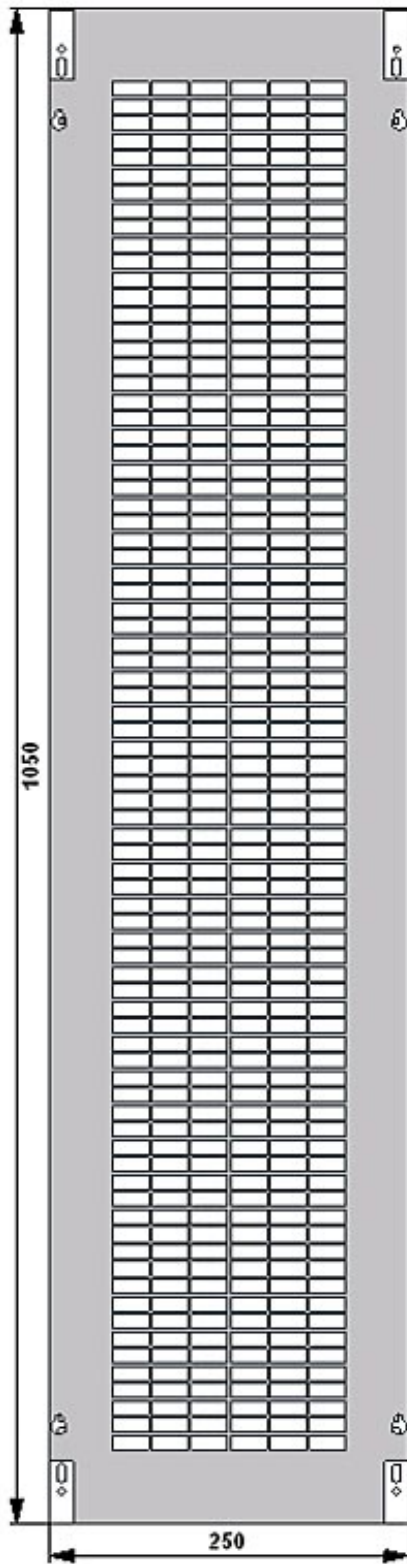

last change:

Aug 26, 2011