

BUZZER ELEMENT 24V AC/DC (PULSAT./CONTIN. TONE ADJUST.)



Figure similar

General technical data:	
product brandname	SIRIUS
Product designation	Buzzer element
Type of voltage of the operating voltage	AC/DC
Operating voltage	
• 1 at DC rated value	24 V
• 1 at AC at 50 Hz rated value	24 V
• 1 at AC at 60 Hz rated value	24 V
Relative positive tolerance of the operating voltage	10 %
Relative negative tolerance of the operating voltage	-10 %
Type of acoustic signal	continuous tone / pulse tone
Loudness level	80 dB
Service life of acoustic signal device	5 000 h
Tone frequency	
• 1	2.1 kHz
Equipment marking	
• acc. to DIN EN 61346-2	P

Mechanical data:

Outer diameter of the signal column element 50 mm

Ambient conditions:

Ambient temperature during operation -20 ... +50 °C

Protection class IP IP54

Product function adjustable acoustic signal Yes

Height 72 mm

Width 52 mm

Certificates/approvals

General Product Approval	EMC	Declaration of Conformity	other
--------------------------	-----	---------------------------	-------



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4220-0FA>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4220-0FA>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/8WD4220-0FA>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4220-0FA&lang=en

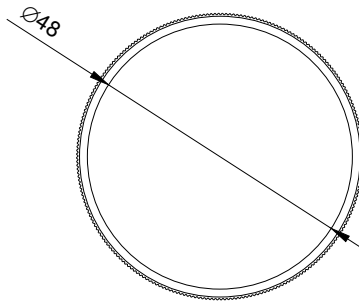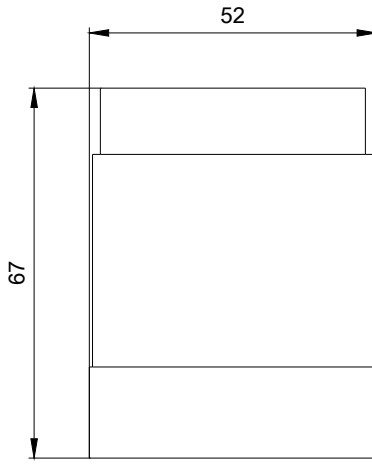

last modified:



W9.4444; 8WD42.-..._ALL
 W6.8611; 8WD42.-..._ALL
 07/26/2017