


## Generell informasjon

Type armatur	Inground/spot
Materiale	Pulver lakkert aluminiumstøp
Avdeknings materiale/optikk	Glass - herdet, klar
Type lyskilde	LED modul AC
Lysstyring	Dimbar (Triac)
Netto / Brutto vekt armatur	0,56kg / 0,64kg
Forpakkingsstørrelse [cm]	23x12,5x9
LED	Lumens EDC 38C 4W xxx 230V A Ver.1.2 (Produktblad/FDV)
Effekt W	4W
Armatureffekt	4W
Modul lumen	439lm
Lumen ut	389lm
Modul effektivitet	109,8lm/W
Armatur Lumen/Watt	97,3lm/W
Fargetemperatur	3000K
Farvekonsistens (McAdam-Ellipse)	SDCM3
Fargegjengivelsesindeks	80
Beregnet levetid L70/B50 ved 25°C	>50 000h
LED fotobiologisk trussel	RG0 or RG1
Energieffektivitetsindeks (EELI)	<b>A++</b>
Virkningsgrad	PF>0,98
THD-faktor	< 20%
Ta nominel:	+25°C
Maksimal omgivelsestemperatur	-35...+25°C
Inrush current	17mA / 60ms

## Filer som kan lastes ned

Photometric LDT files, Photometric IES files, Manual

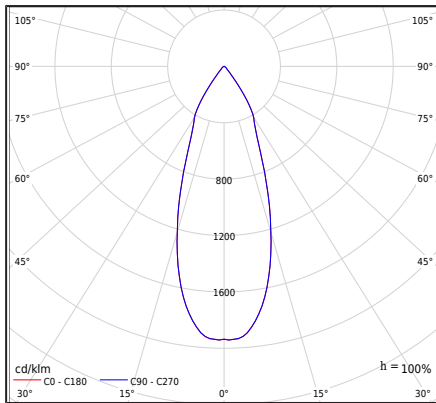

[m]	Ø [m]	E(0°)	E(C0)
0.5	0.34	3011	18,8° 1287
1.0	0.68	753	18,8° 322
1.5	1.02	335	18,8° 143
2.0	1.36	188	18,8° 80
2.5	1.70	120	18,8° 51
3.0	2.04	84	18,8° 36

— C0 - C180 (Kat polowkowy; 37.6°)