

Technical data sheet

Function maintenance – standard support structures,
vertical ladders – Strain relief




US 3 suspended support



Suspended support (U profile) of dimensions 50 x 30 mm with welded head plate.

| Type | Length mm | Material thickness mm | Pack. pcs | Weight kg/100 pcs. | Item No. |
|---------------|--------------|-----------------------------|--------------|-----------------------|----------|
| US 3 K 20 FT | 200 | 2 | 1 | 50,500 | 6342351 |
| US 3 K 30 FT | 300 | 2 | 1 | 64,400 | 6342353 |
| US 3 K 40 FT | 400 | 2 | 1 | 78,300 | 6342355 |
| US 3 K 50 FT | 500 | 2 | 1 | 92,300 | 6342357 |
| US 3 K 60 FT | 600 | 2 | 1 | 106,200 | 6342359 |
| US 3 K 70 FT | 700 | 2 | 1 | 120,200 | 6342362 |
| US 3 K 80 FT | 800 | 2 | 1 | 134,100 | 6342364 |
| US 3 K 90 FT | 900 | 2 | 1 | 147,800 | 6342366 |
| US 3 K 100 FT | 1000 | 2 | 1 | 162,000 | 6342368 |
| US 3 K 110 FT | 1100 | 2 | 1 | 175,900 | 6342370 |
| US 3 K 120 FT | 1200 | 2 | 1 | 189,900 | 6342372 |

Dimensions

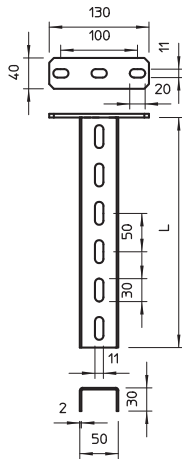

St Steel

FT Hot-dip galvanised