


Technical data sheet Metal spreading anchor

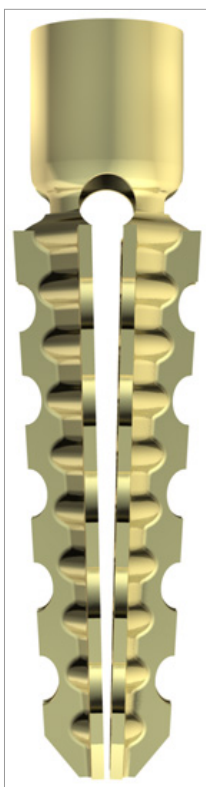


Areas of application: gas concrete, lightweight concrete, Poroton, pumice, plaster, hollow brick and full brick. Can be knocked into porous concrete (gas concrete) of low resistance without drilling. Superbly suited for areas subjected to high temperatures.

Type	Dimensi on D mm	Dimensi on L mm	Bore hole diameter mm	minimum bore hole depth mm	Box quantity	Pack. pcs	Weight kg/100 pcs.	Art.-No.
MD 5 GTP	5	30	5		2400	200	0.190	348460 2
MD 6 GTP	6	32	7		1400	100	0.250	348462 9

St Steel

GTP Electrogalvanised, transparently passivated

/100



CE