

# Technical data sheet Angler straddling dowel




Required minimum screw length = anchor length + component thickness + 1 x screw Ø.

Withdrawal force applies to wood screws of the largest screw diameter, required safety values must be taken into account.


Type	Anchor diameter mm	Length mm	Drill hole diameter mm	Pull-out force N min/concrete	Shipping box	Pack Units	Weight kg/100 pc.	Art-No.
910 N 5x25 GRW	5	25	5	300	9000	100	0.051	2349043
910 N 6x30 GRW	6	30	6	550	5000	100	0.052	2349051
910 N 6x60 GRW	6	60	6	550	3000	100	0.080	2349078
910 N 8x40 GRW	8	40	8	800	3000	100	0.140	2349086
910 N 10x50 GRW	10	50	10	1150	1500	50	0.306	2349108
910 N 12x60 GRW	12	60	12	1900	750	25	0.459	2349124

PA Polyamide

/100

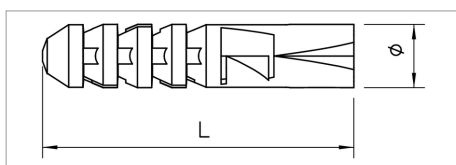

## Legend

 Communautés Européennes, EC declaration of conformity according to EC directives



Halogen-free; without chlorine, fluorine and bromine