



**RCD/RCB combination switch, 16A, 100mA, D-LS-Char, 3N pole, FI-Char: A**

**Part no.** mRB6-16/3N/D/01-A  
**Article no.** 120676

Similar to illustration

## Delivery program

|  |                |    |  |
|--|----------------|----|--|
| Basic function                                     |                |    | Combined RCD/RCB devices                               |
| Number of poles                                    |                |    | 3 pole+N   |
| Tripping characteristic                            |                |    | D  |
| Application  |                |    | Switchgear for residential and commercial applications |
| Rated current                                      | $I_n$          | A  | 16   |
| Rated switching capacity acc. to IEC/EN 60947-2    |                | kA | 6  |
| Rated switching capacity according to IEC/EN 61009 |                | kA | 6  |
| Rated fault current                                | $I_{\Delta N}$ | A  | 0.1  |
| Type   |                |    | Type A   |
| Tripping   |                | A  | non-delayed  |
| Product range                                      |                |    | mRB6   |
| Sensitivity  |                |    | Pulse-current sensitive                                |
| Impulse withstand current                          |                |    | Partly surge-proof 250 A                               |
| Contact sequence                                   |                |    |  |

## Technical data

### Electrical

|   |                 |      |                           |
|---|-----------------|------|---------------------------|
| Standards                                       |                 |      | IEC/EN 61009              |
| Tripping  |                 | A    | non-delayed               |
| Rated operating voltage                         | $U_e$           | V AC | 230/400                   |
| Rated frequency                                 | f               | Hz   | 50                        |
| Rated fault currents                            | $I_{\Delta n}$  | mA   | 30, 100, 300              |
| Rated non-tripping current                      | $I_{\Delta no}$ |      | $0.5 \times I_{\Delta n}$ |
| Sensitivity                                     |                 |      | DC and pulsed current     |
| Rated switching capacity                        | $I_{cn}$        | kA   | 6                         |
| Rated current                                   | $I_e$           | A    | 6 - 25                    |
| Rated impulse withstand voltage                 | $U_{imp}$       | kV   | 4 (1.2/50 $\mu$ s)        |
| Characteristic                                  |                 |      | B, C, D                   |
| Maximum max. as short-circuit protective device |                 | A gL | 100                       |
| Selectivity Class                               |                 |      | 3                         |
| Lifespan  |                 | S    |                           |
| Electrical                                      |                 |      | Operations > 4000         |
| Mechanical                                      |                 |      | Operations > 20000        |

### Mechanical

|                          |  |    |  |
|--------------------------|--|----|--|
| Standard front dimension |  | mm | 45   |
| Enclosure height         |  | mm | 80   |
| Terminal protection      |  |    | Busbar tag shroud to VBG4  |
| Mounting width           |  | mm | 70 (4 SU)  |
| Mounting                 |  |    | Tristable slide catch enables removal from existing combination. |
| Degree of protection     |  |    |  |
| Switch                   |  |    | IP20   |

|                                      |  |                 |  |
|--------------------------------------|--|-----------------|--|
| Integrated                           |  |                 | IP40   |
| Terminals top and bottom             |  |                 | Twin-purpose terminals                                 |
| Terminal capacities                  |  | mm <sup>2</sup> |  |
| Solid                                |  | mm <sup>2</sup> | 1 - 25   |
| Thickness of busbar material         |  | mm              | 0.8 ... 2  |
| Admissible ambient temperature range |  | °C              | -25 ... +40  |
| Climatic proofing                    |  |                 | according to IEC 68-2 (25 - 55 °C, 90 - 95 % Humidity) |

## Design verification as per IEC/EN 61439


|  |                   |    |  |
|--|-------------------|----|--|
| Technical data for design verification   |                   |    |  |
| Rated operational current for specified heat dissipation   | I <sub>n</sub>    | A  | 16   |
| Heat dissipation per pole, current-dependent   | P <sub>vid</sub>  | W  | 0  |
| Equipment heat dissipation, current-dependent  | P <sub>vid</sub>  | W  | 11.2   |
| Static heat dissipation, non-current-dependent   | P <sub>vs</sub>   | W  | 0  |
| Heat dissipation capacity  | P <sub>diss</sub> | W  | 0  |
| Operating ambient temperature min.   |                   | °C | -25  |
| Operating ambient temperature max.   |                   | °C | 40   |
|  |                   |    | 0  |
| IEC/EN 61439 design verification   |                   |    |  |
| 10.2 Strength of materials and parts   |                   |    |  |
| 10.2.2 Corrosion resistance  |                   |    |  |
| 10.2.2.1 Verification of thermal stability of enclosures   |                   |    | Meets the product standard's requirements.                         |
| 10.2.2.2 Verification of resistance of insulating materials to normal heat   |                   |    | Meets the product standard's requirements.                         |
| 10.2.2.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    | Meets the product standard's requirements.                         |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                   |    |  |
| 10.2.5 Lifting   |                   |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact   |                   |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions  |                   |    |  |
| 10.3 Degree of protection of ASSEMBLIES  |                   |    |  |
| 10.4 Clearances and creepage distances   |                   |    |  |
| 10.5 Protection against electric shock   |                   |    |  |
| 10.6 Incorporation of switching devices and components   |                   |    |  |
| 10.7 Internal electrical circuits and connections  |                   |    |  |
| 10.8 Connections for external conductors   |                   |    |  |
| 10.9 Insulation properties   |                   |    |  |
| 10.9.2 Power-frequency electric strength   |                   |    | Is the panel builder's responsibility.                             |
| 10.9.3 Impulse withstand voltage   |                   |    | Is the panel builder's responsibility.                             |
| 10.9.4 Testing of enclosures made of insulating material   |                   |    | Is the panel builder's responsibility.                             |
| 10.10 Temperature rise   |                   |    |  |
| 10.11 Short-circuit rating   |                   |    |  |
| 10.12 Electromagnetic compatibility  |                   |    |  |
| 10.13 Mechanical function  |                   |    |  |

## Technical data ETIM 6.0

|   |  |   |     |
|---|--|---|-----|
| Circuit breakers and fuses (EG000020) / Earth leakage circuit breaker (EC000905)  |  |   |     |
| Electric engineering, automation, process control engineering / Electrical installation, device / Residual current protection system / MCB/RCCB combination (ecl@ss8.1-27-14-22-07 [AFZ810012]) |  |   |     |
| Number of poles (total)   |  |   | 4   |
| Number of protected poles   |  |   | 1   |
| Nominal rated voltage   |  | V | 400 |
| Nominal rated current   |  | A | 16  |
| Rated fault current   |  | A | 0.1 |

|   |    |       |
|---|----|-------|
| Leakage current type                              |    | A     |
| Current limiting class                            |    | 3     |
| Rated short-circuit breaking capacity EN 60898    | kA | 6     |
| Rated short-circuit breaking capacity IEC 60947-2 | kA | 0     |
| Frequency   |    | 50 Hz |
| Release characteristic                            |    | D     |
| Concurrently switching N-neutral                  |    | Yes   |
| Over voltage category                             |    | 3     |
| Pollution degree                                  |    | 2     |
| Width in number of modular spacings               |    | 4     |
| Built-in depth                                    | mm | 70    |
| Suitable for flush-mounted installation           |    | No    |
| Degree of protection (IP)                         |    | IP20  |
| Surge current capacity                            | kA | 0.25  |
| Voltage type                                      |    | AC    |
| Antinuisance tripping version                     |    | No    |

## Characteristics

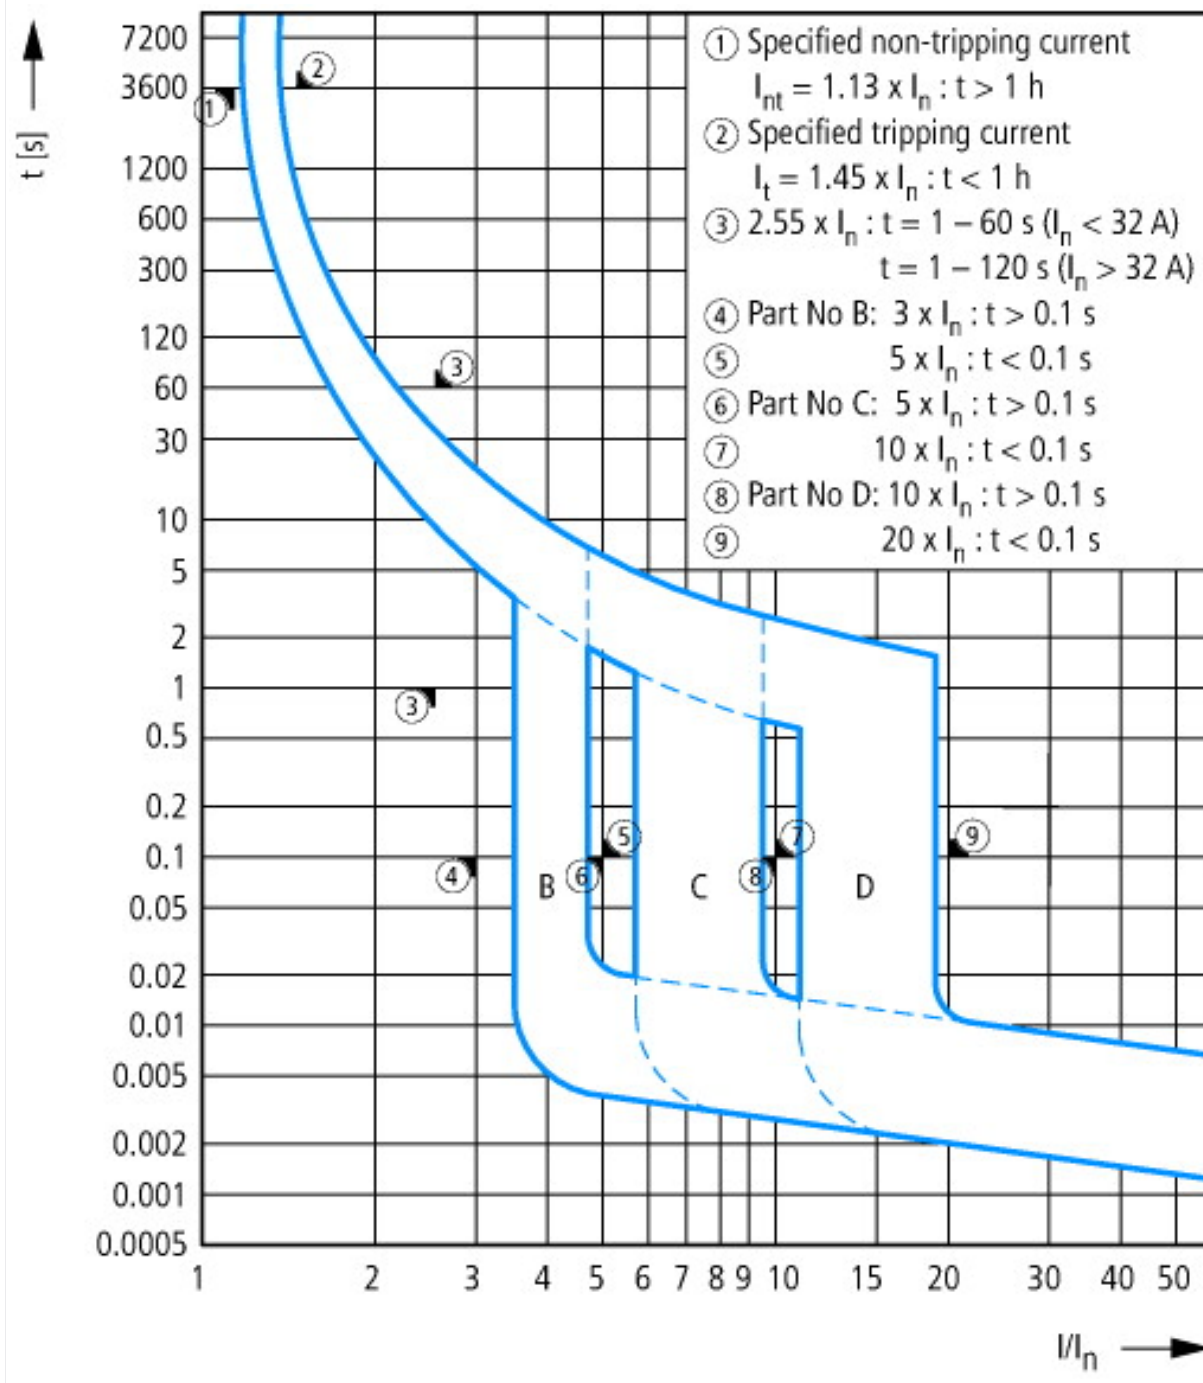

## Dimensions

