



**Digital residual current circuit-breaker, 63A, 4p, 300mA, type S/B+**



**Part no.** FRCDM-63/4/03-S/B+  
**Catalog No.** 167890  
**Alternate Catalog No.** FRCDM-63/4/03-S/B.  
**EL-Nummer (Norway)** 0001664185

Similar to illustration

**Delivery program**

|                              |                |      |  |
|------------------------------|----------------|------|--|
| Basic function               |                |      | Residual current circuit-breakers , digital                    |
| Number of poles              |                |      | 4 pole   |
| Application                  |                |      | Switchgear for industrial and advanced commercial applications |
| Rated current                | $I_n$          | A    | 63   |
| Rated short-circuit strength | $I_{cn}$       | kA   | 10   |
| Rated fault current          | $I_{\Delta N}$ | A    | 0.3  |
| Type                         |                |      | Type S/B+  |
| Tripping                     |                | s... | selective switch off   |
| Product range                |                |      | FRCDM  |
| Sensitivity                  |                |      | All current sensitive  |
| Impulse withstand current    |                |      | surge-proof 5 kA   |
| Contact sequence             |                |      |  |

**Technical data**

**Electrical**

|  |                      |      |                                    |
|--|----------------------|------|------------------------------------|
| Types conform to   |                      |      | VDE 0664-400                       |
| Current test marks   |                      |      | As per inscription                 |
| Tripping   |                      | s... | 40 ms delay - selective switch off |
| Rated voltage according to IEC/EN 60947-2  | $U_n$                | V AC | 240/415                            |
| Rated frequency  | f                    | Hz   | 50                                 |
| Limit values of the operating voltage  |                      |      |                                    |
| electronic   |                      | V AC | 50 - 456                           |
| Test circuit   |                      | V AC | 184 - 440                          |
| Rated fault current  | $I_{\Delta n}$       | mA   | 300                                |
| Sensitivity  |                      |      | All current sensitive              |
| Rated insulation voltage   | $U_i$                | V    | 440                                |
| Rated impulse withstand voltage  | $U_{imp}$            | kV   | 4                                  |
| Rated short-circuit strength   | $I_{cn}$             | kA   | 10                                 |
| Impulse withstand current  |                      |      | 5 kA (8/20 $\mu$ s) surge-proof    |
| Max. admissible back-up fuse   |                      |      |                                    |
| Short-circuit  | gG/gL                | A    | 63                                 |
| Overload   | gG/gL                | A    | 63                                 |
| Rated making and breaking capacity / Rated residual making and breaking capacity | $I_m / I_{\Delta m}$ | A    | 630                                |
| lifespan   |                      |      |                                    |
| Electrical   | Operations           |      | $\geq$ 4000                        |
| Mechanical   | Operations           |      | $\geq$ 20000                       |

**Dry auxiliary contact**

|                          |  |   |   |
|--------------------------|--|---|---|
| Rated switching capacity |  |   |   |
| 30 VDC (resistive load)  |  | A | 2 |

|  |                 |                      |
|--|-----------------|----------------------|
| 240 VAC (resistive load)   | A               | 0.25                 |
| Max. switching duty (resistive load)   | W               | 60                   |
| Max. switching voltage AC  | V               | 240                  |
| Max. switching voltage DC  | V               | 220                  |
| Maximum switching current  | A               | 2                    |
| Min. switching capacity (reference value)                                    |                 | 10 $\mu$ A, 10 mV DC |
| lifespan   |                 |                      |
| Electrical (at 20 switching operations per minute) 2 A 30 VDC resistive load | Operations      | $\geq 10^5$          |
| Electrical (at 20 switching operations per minute) 1 A 30 VDC resistive load | Operations      | $\geq 5 \times 10^5$ |
| Terminal capacity  | mm <sup>2</sup> | 0.25 - 1.5           |

## Mechanical

|  |                 |   |
|--|-----------------|---|
| Standard front dimension                       | mm              | 45  |
| Device height                                  | mm              | 80  |
| Built-in width                                 | mm              | 70 (4TE)  |
| Mounting                                       |                 | Quick attachment with 2 latch positions for DIN-rail IEC/EN 60715         |
| Degree of Protection                           |                 | IP40, IP54 (with moisture-proof enclosure)                                |
| Terminals top and bottom                       |                 | Twin-purpose terminals  |
| Terminal protection                            |                 | finger and hand touch safe, DGUV VS3, EN 50274                            |
| Terminal cross-section                         |                 |   |
| Solid  | mm <sup>2</sup> | 1.5 - 35  |
| Stranded                                       | mm <sup>2</sup> | 2 x 16  |
| Terminal cross-section                         |                 | M5 (with cross-recessed screw as defined in EN ISO 4757-Z2, Pozidriv PZ2) |
| Tightening torque of fixing screws             | N/m             | 2 - 2.4   |
| Thickness of busbar material                   | mm              | 0.8 - 2   |
| Admissible ambient temperature range           | °C              | -25 - +40   |
| Permissible storage and transport temperatures | °C              | -35 - +60   |
| Climatic proofing                              |                 | 25-55°C/90-95% relative humidity according to IEC 60068-2                 |
| Mounting position                              |                 | As required   |
| Contact position indicator                     |                 | red / green   |
| Trip indication                                |                 | white / blue  |

## Design verification as per IEC/EN 61439


|  |                   |    |   |
|--|-------------------|----|---|
| Technical data for design verification   |                   |    |   |
| Rated operational current for specified heat dissipation   | I <sub>n</sub>    | A  | 63  |
| Heat dissipation per pole, current-dependent   | P <sub>vid</sub>  | W  | 0   |
| Equipment heat dissipation, current-dependent  | P <sub>vid</sub>  | W  | 10  |
| Static heat dissipation, non-current-dependent   | P <sub>vs</sub>   | W  | 0   |
| Heat dissipation capacity  | P <sub>diss</sub> | W  | 0   |
| Operating ambient temperature min.   |                   | °C | -25   |
| Operating ambient temperature max.   |                   | °C | 40  |
|  |                   |    | Maximum operating temperature is 60 °C in accordance with the de-rating table |
| IEC/EN 61439 design verification   |                   |    |   |
| 10.2 Strength of materials and parts   |                   |    |   |
| 10.2.2 Corrosion resistance  |                   |    |   |
| Meets the product standard's requirements.   |                   |    |   |
| 10.2.3.1 Verification of thermal stability of enclosures   |                   |    |   |
| Meets the product standard's requirements.   |                   |    |   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                   |    |   |
| Meets the product standard's requirements.   |                   |    |   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    |   |
| Meets the product standard's requirements.   |                   |    |   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                   |    |   |
| Meets the product standard's requirements.   |                   |    |   |
| 10.2.5 Lifting   |                   |    |   |
| Does not apply, since the entire switchgear needs to be evaluated.   |                   |    |   |
| 10.2.6 Mechanical impact   |                   |    |   |
| Does not apply, since the entire switchgear needs to be evaluated.   |                   |    |   |
| 10.2.7 Inscriptions  |                   |    |   |
| Meets the product standard's requirements.   |                   |    |   |
| 10.3 Degree of protection of ASSEMBLIES  |                   |    |   |
| Does not apply, since the entire switchgear needs to be evaluated.   |                   |    |   |
| 10.4 Clearances and creepage distances   |                   |    |   |
| Meets the product standard's requirements.   |                   |    |   |
| 10.5 Protection against electric shock   |                   |    |   |
| Does not apply, since the entire switchgear needs to be evaluated.   |                   |    |   |

|  |  |  |
|--|--|--|
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections        |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors                 |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties                               |  |  |
| 10.9.2 Power-frequency electric strength                 |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage                         |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise                                   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                               |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                      |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

|   |                 |          |
|---|-----------------|----------|
| Circuit breakers and fuses (EG000020) / Residual current circuit breaker (RCCB) (EC000003)  |                 |          |
| Electric engineering, automation, process control engineering / Electrical installation, device / Residual current protection system / Residual current circuit breaker (RCCB)<br>(ec@ss10.0.1-27-14-22-01 [AAB906014]) |                 |          |
| Number of poles   |                 | 4        |
| Rated voltage   | V               | 415      |
| Rated current   | A               | 63       |
| Rated fault current   | mA              | 300      |
| Rated insulation voltage $U_i$  | V               | 440      |
| Rated impulse withstand voltage $U_{imp}$   | kV              | 4        |
| Mounting method   |                 | DIN rail |
| Leakage current type  |                 | B+       |
| Selective protection  |                 | Yes      |
| Short-time delayed tripping   |                 | No       |
| Short-circuit breaking capacity ( $I_{cw}$ )  | kA              | 10       |
| Surge current capacity  | kA              | 5        |
| Frequency   |                 | 50 Hz    |
| Additional equipment possible   |                 | Yes      |
| With interlocking device  |                 | Yes      |
| Degree of protection (IP)   |                 | IP20     |
| Width in number of modular spacings   |                 | 4        |
| Built-in depth  | mm              | 70.5     |
| Ambient temperature during operating  | °C              | -25 - 40 |
| Pollution degree  |                 | 2        |
| Connectable conductor cross section multi-wired   | mm <sup>2</sup> | 1.5 - 16 |
| Connectable conductor cross section solid-core  | mm <sup>2</sup> | 1.5 - 35 |

## Characteristics

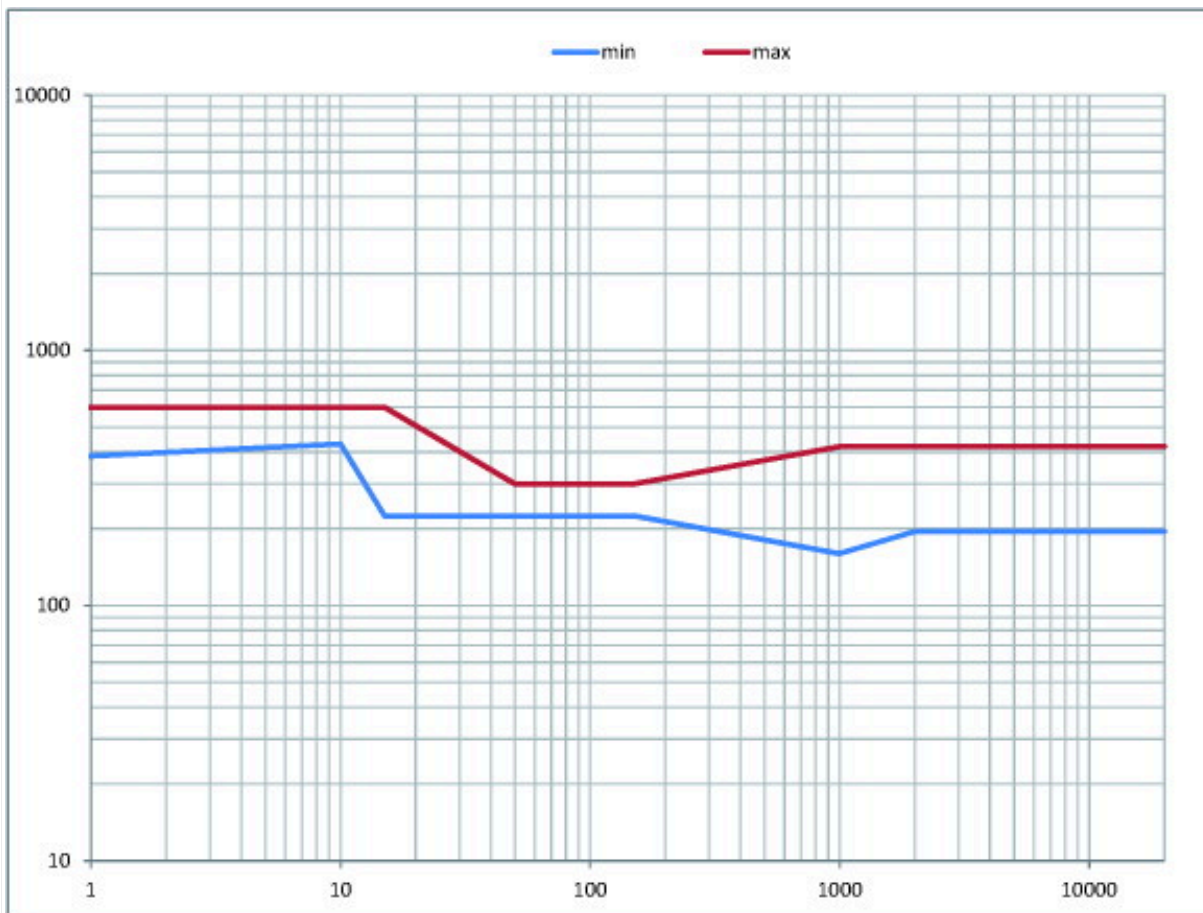

Tripping current frequency range: | FRCdM, 300 mA, type B+

# Influence of the ambient temperature to the maximum continuous current (A)

| Range               | <b>FRCdM type B, Bfq, B+</b> |                    |                    |
|---------------------|------------------------------|--------------------|--------------------|
| Ambient temperature | Amperage                     |                    |                    |
|                     | RCCB rating<br>25A           | RCCB rating<br>40A | RCCB rating<br>63A |
|                     | 40°                          | 25                 | 40                 |
| 45°                 | 25                           | 40                 | 56                 |
| 50°                 | 25                           | 40                 | 50                 |
| 55°                 | 25                           | 35                 | 45                 |
| 60°                 | 25                           | 30                 | 40                 |

Derating - table FRCdM\_B

## Dimensions

