


Isolerstoffkapslinger type: EK EKO

Underdel: (HxBxD) 280x280x100
EKOE - 2536212

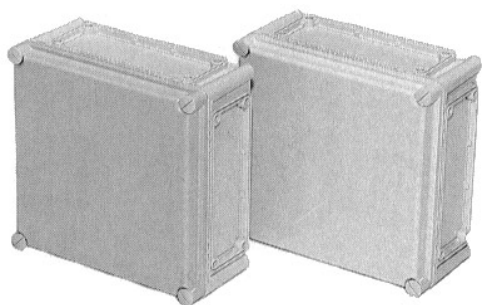


Teknisk informasjon:

Slagfast polykarbonat med klare og grå lokk.


IP 67, halogenfri, polykarbonat,
-40°C - +120°C
max. 80°C kontinuerlig

Tilleggsutstyr:

Type EL.nr.



EKOVT 2536444




EKV 22 2536455




EKOZR 2536372




MB 10546 2536381




MB 10593 2536385




MB 10594 2536386




MB 10595 2536387



MB 10596 2536388

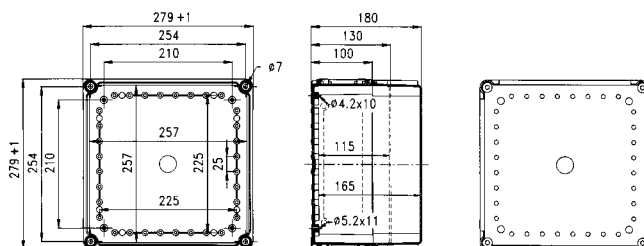

Egenskaper	Klassifisering
<ul style="list-style-type: none"> - Tetthetsgrad - Totalisolert - Standard farge - Kapslingsmateriale 	IP-67 (IEC 529)  Lys grå (RAL 7035)
Underdel Lokk Lokkskruer Pakning	Glassfiberarmert polykarbonat Polykarbonat Polyamid Polyuretan/EPDM
Polykarbonatets egenskaper: <ul style="list-style-type: none"> - Temperaturbestandighet: - Max temperatur, kortvarig - Max temperatur, kontinuerlig - Slagfasthet 	-40°C til +120°C Max +80°C Meget høy (ved +23°C DIN 53453 ISO/R179 50 kJ/m ² for underdel)
<ul style="list-style-type: none"> - Brennbarhet - Brannklasse - Avgasser - Kjemiske egenskaper 	Selvslukkende UL 94-5V Halogenfri Meget god (be om egen oversikt)