


Isolerstoffkapslinger type: EK EKP

Underdel: (HxBxD) 380x280x150
EKP - 2536218

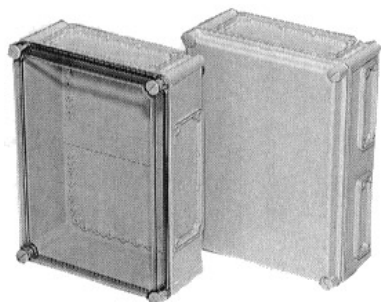


Tekniskinformasjon:

Slagfast polykarbonat med klare og grå lokk.

IP 67, halogenfri, polykarbonat,
-40°C - +120°C
max. 80°C kontinuerlig

Tilleggsutstyr:

	Type	EL.nr.
	EKPVT	2536445
	EKV 22	2536455
	EKV 32	2536456
	EKPZR	2536373
	MB 10215	2536380
	MB 10546	2536381
	MB 10324	2536389
	MB 10593	2536385

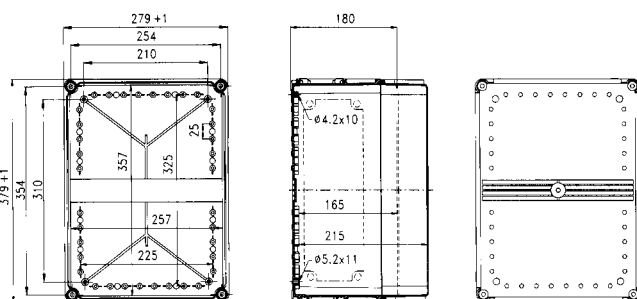

Egenskaper	Klassifisering
<ul style="list-style-type: none"> - Tetthetsgrad - Totalisolert - Standard farge - Kapslingsmateriale 	IP-67 (IEC 529) <input type="checkbox"/> Lys grå (RAL 7035)
Underdel Lokk Lokkskruer Pakning	Glassfiberarmert polykarbonat Polykarbonat Polyamid Polyuretan/EPDM
Polykarbonatets egenskaper: <ul style="list-style-type: none"> - Temperaturbestandighet: - Max temperatur, kortvarig - Max temperatur, kontinuerlig - Slagfasthet 	-40°C til +120°C Max +80°C Meget høy (ved +23°C DIN 53453 ISO/R179 50 kJ/m ² for underdel)
<ul style="list-style-type: none"> - Brennbarhet - Brannklasse - Avgasser - Kjemiske egenskaper 	Selvslukkende UL 94-5V Halogenfri Meget god (be om egen oversikt)