

Isolerstoffkapslinger type : Euronorm II (Polykarbonat)

122008 (120 x 200 x 75)

120 x 200 x 75 mm (69 mm indre) klart lokk
PCT 122008 - 2536614



Tekniskinformasjon:


Slagfast polykarbonat med klare og grå lokk. Glatte sider.

IP 67, halogenfri, polykarbonat
-40°C - +120°C
max. + 80°C kontinuerlig

Tilleggsutstyr:


Type

EL.nr.




TM 1220

2536695



TRH 1220

2536714




TF 28037

2536729




MR 28036

2536732



TH A

2536735

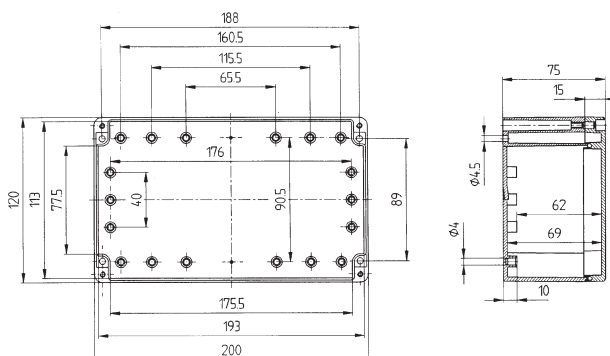

122008

120 x 200 x 75

| Egenskaper | Polykarbonat | Aluminium |
|--------------------------------|---------------------------------|---------------------------------|
| - Tetthetsgrad | IP-65 (IEC-529) | IP-67 (IEC-529) |
| - Totalisolert | - | - |
| - Standard farge | Grå (RAL-7035) | Grå (RAL-7001) |
| - Pakning | Polyuretan | Polyuretan |
| - Temperaturbestandighet: | | |
| - Max temperatur, kortvarig | -40°C til +120°C | -50°C til +140°C |
| - Max temperatur, kontinuerlig | Max +80°C | Max +80°C |
| - Slagfasthet | Meget høy | Meget høy |
| - Brennbarhet | UL94-V2 | - |
| - Avgasser | Halogenfri | - |
| - Kjemiske egenskaper | Meget god (be om egen oversikt) | Meget god (be om egen oversikt) |