


Isolerstoffkapslinger type : Euronorm II (Polykarbonat)

233009 (230 x 300 x 90)

230 x 300 x 90 mm (80 mm indre) grått lokk

PC 233009 - 2536621

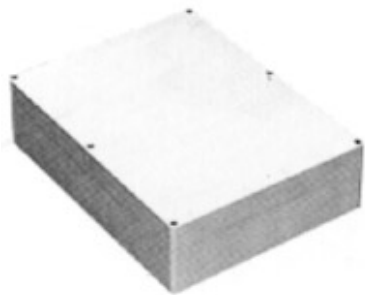


Tekniskinformasjon:

Slagfast polykarbonat med klare og grå lokk. Glatte sider.


IP 67, halogenfri, polykarbonat.
-40°C - +120°C
max. +80°C kontinuerlig.

Tilleggsutstyr:


Type EL.nr.



TM 2330 2536697




TRH 2330 2536716




TF 28037 2536729



MR 28036 2536732



TH A 2536735

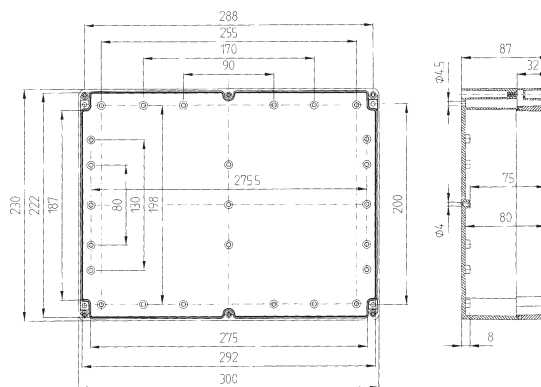

233009

230 x 300 x 90

Egenskaper	Polykarbonat	Aluminium
- Tetthetsgrad	IP-65 (IEC-529)	IP-67 (IEC-529)
- Totalisolert	-	-
- Standard farge	Grå (RAL-7035)	Grå (RAL-7001)
- Pakning	Polyuretan	Polyuretan
- Temperaturbestandighet:		
- Max temperatur, kortvarig	-40°C til +120°C	-50°C til +140°C
- Max temperatur, kontinuerlig	Max +80°C	Max +80°C
- Slagfasthet	Meget høy	Meget høy
- Brennbarhet	UL94-V2	-
- Avgasser	Halogenfri	-
- Kjemiske egenskaper	Meget god (be om egen oversikt)	Meget god (be om egen oversikt)