

Aluminiumskapslinger type : Euronorm II
AL 122208 (125 x 222 x 81)

125 x 222 x 81 mm (73 mm indre) grå
 AL 122208 - 2536659




Tekniskinformasjon:

Høykvalitet korrosjonssikkert aluminium. Alle med jordskrue.
 Glatte sider.

IP 67, aluminiumsgods,
 polyuretantetning,
 -50°C - +140°C
 max. +80°C kontinuerlig.
 Farge : Grå RAL 7001

Tilleggsutstyr:

	Type	EL.nr.
	AM 1222	2536703
	ARH 22	2536724
	MR 28541	2536731
	MR 75005	2536734
	AH A	2536736

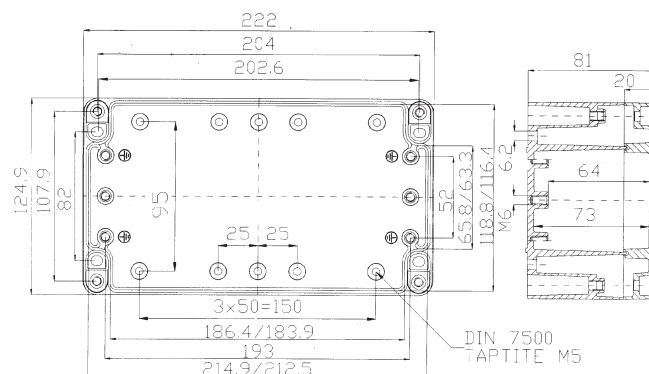

AL 122208

125 x 222 x 81

Egenskaper	Polykarbonat	Aluminium
- Tetthetsgrad	IP-65 (IEC-529)	IP-67 (IEC-529)
- Totalisolert	-	-
- Standard farge	Grå (RAL-7035)	Grå (RAL-7001)
- Pakning	Polyuretan	Polyuretan
- Temperaturbestandighet:		
- Max temperatur, kortvarig	-40°C til +120°C	-50°C til +140°C
- Max temperatur, kontinuerlig	Max +80°C	Max +80°C
- Slagfasthet	Meget høy	Meget høy
- Brennbarhet	UL94-V2	-
- Avgasser	Halogenfri	-
- Kjemiske egenskaper	Meget god (be om egen oversikt)	Meget god (be om egen oversikt)