





**Contactor, I<sub>th</sub> = I<sub>e</sub>: 1050 A, 220 - 240 V 50/60 Hz, AC operation, Screw connection**


**Part no. DILH800-S/22(220-240V50/60HZ)**  
**Catalog No. 197916**  
**Alternate Catalog No. XTCSH800M22B**

**Delivery program**

|   |                                  |   |  |
|---|----------------------------------|---|--|
| Product range   |                                  |   | Contactors   |
| Application   |                                  |   | Mains contactors for resistive loads from 1000 A   |
| Subrange  |                                  |   | AC -1 contactors greater than 1000 A   |
| Utilization category  |                                  |   | AC-1: Non-inductive or slightly inductive loads, resistance furnaces   |
| Connection technique  |                                  |   | Screw connection   |
| <b>Rated operational current</b>                              |                                  |   |  |
| AC-1  |                                  |   |  |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz     |                                  |   |  |
| Open  |                                  |   |  |
| at 40 °C  | I <sub>th</sub> = I <sub>e</sub> | A | 1050   |
| enclosed  | I <sub>th</sub>                  | A | 800  |
| Conventional free air thermal current, 1 pole                 |                                  |   |  |
| open  | I <sub>th</sub>                  | A | 2138   |
| Contact sequence  |                                  |   |   |
| For use with  |                                  |   | DILH800-XHI...   |
| Actuating voltage   |                                  |   | 220 - 240 V 50/60 Hz   |
| Voltage AC/DC   |                                  |   | AC operation   |
| <b>Auxiliary contacts</b>                                     |                                  |   |  |
| possible variants at auxiliary contact module fitting options |                                  |   | sidewise: 2 x DILH800-XHI11(V)-SI; 2 x DILH800-XHI11-SA  |
| Side mounting auxiliary contacts                              |                                  |   |    |
| <b>Instructions</b>   |                                  |   | Interlocked opposing contacts according to IEC/EN 60947-5-1 Appendix L, inside the auxiliary contact module<br>Auxiliary contacts used as mirror contacts according to IEC/EN 60947-4-1 Appendix F (not N/C late open) |
| <b>Instructions</b>   |                                  |   | integrated suppressor circuit in actuating electronics<br>660 V, 690 V or 1000 V: not directly reversing   |

**Technical data**

|                                 |              |                   |  |
|---------------------------------|--------------|-------------------|--|
| <b>General</b>                  |              |                   |  |
| Standards                       |              |                   | IEC/EN 60947, VDE 0660, UL, CSA, CCC   |
| Lifespan, mechanical            |              |                   |  |
| AC operated                     | Operations   | x 10 <sup>6</sup> | 3  |
| DC operated                     | Operations   | x 10 <sup>6</sup> | 3  |
| Operating frequency, mechanical |              |                   |  |
| AC operated                     | Operations/h |                   | 1000   |
| DC operated                     | Operations/h |                   | 1000   |
| Climatic proofing               |              |                   | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature             |              |                   |  |
| Open                            |              | °C                | -40 - +70  |
| Storage                         |              | °C                | - 40 - + 80  |
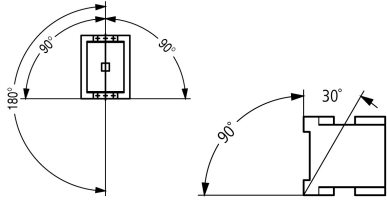
|   |                  |                 |   |
|---|------------------|-----------------|---|
| Mounting position                               |                  |                 |  |
| Mechanical shock resistance (IEC/EN 60068-2-27) |                  |                 |   |
| Half-sinusoidal shock, 10 ms                    |                  |                 |   |
| Main contacts                                   |                  |                 |   |
| N/O contact                                     | g                |                 | 10  |
| Auxiliary contacts                              |                  |                 |   |
| N/O contact                                     | g                |                 | 10  |
| N/C contact                                     | g                |                 | 8   |
| Degree of Protection                            |                  |                 | IP00  |
| Altitude  | m                |                 | Max. 2000   |
| Weight  | kg               |                 | 9.5   |
| Terminal capacity main cable                    |                  |                 |   |
| Flexible with cable lug                         |                  | mm <sup>2</sup> | 50 - 240  |
| Stranded with cable lug                         |                  | mm <sup>2</sup> | 70 - 240  |
| Busbar  | Width            | mm              | 50  |
| Main cable connection screw/bolt                |                  |                 | M10   |
| Tightening torque                               | Nm               |                 | 24  |
| Terminal capacity control circuit cables        |                  |                 |   |
| Solid   |                  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)  |
| Flexible with ferrule                           |                  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)  |
| Solid or stranded                               |                  | AWG             | 18 - 14   |
| Stripping length                                |                  | mm              | 10  |
| Control circuit cable connection screw/bolt     |                  |                 | M3.5  |
| Tightening torque                               | Nm               |                 | 1.2   |
| Tool  |                  |                 |   |
| Main cable                                      |                  |                 |   |
| Width across flats                              |                  | mm              | 16  |
| Control circuit cables                          |                  |                 |   |
| Pozidriv screwdriver                            |                  | Size            | 2   |
| Standard screwdriver                            |                  | mm              | 0.8 x 5.5/1 x 6   |
| <b>Main conducting paths</b>                    |                  |                 |   |
| Rated impulse withstand voltage                 | U <sub>imp</sub> | V AC            | 12000   |
| Overvoltage category/pollution degree           |                  |                 | III/3   |
| Rated insulation voltage                        | U <sub>i</sub>   | V AC            | 1000  |
| Rated operational voltage                       | U <sub>e</sub>   | V AC            | 1000  |
| Safe isolation to EN 61140                      |                  |                 |   |
| between coil and contacts                       |                  | V AC            | 1000  |
| between the contacts                            |                  | V AC            | 1000  |
| Making capacity (p.f. to IEC/EN 60947)          |                  | A               | 6000  |
| Breaking capacity                               |                  |                 |   |
| 220 V 230 V                                     |                  | A               | 4800  |
| 380 V 400 V                                     |                  | A               | 4800  |
| 500 V   |                  | A               | 4800  |
| 660 V 690 V                                     |                  | A               | 2000  |
| 1000 V  |                  | A               | 1575  |
| Short-circuit rating                            |                  |                 |   |
| Short-circuit protection maximum fuse           |                  |                 |   |
| AC-1  |                  |                 |   |
| 400 V   | aR 500 V         | A               | 1260 (2 x 630)  |

|        |           |   |                |
|--------|-----------|---|----------------|
| 690 V  | aR 690 V  | A | 1260 (2 x 630) |
| 1000 V | aR 1000 V | A | 1260 (2 x 630) |

## AC

|   |                |   |  |
|---|----------------|---|--|
| AC-1  |                |   |  |
| Rated operational current                                 |                |   |  |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |   |  |
| Open  |                |   |  |
| at 40 °C  | $I_{th} = I_e$ | A | 1050   |
| at 50 °C  | $I_{th} = I_e$ | A | 940  |
| at 55 °C  | $I_{th} = I_e$ | A | 895  |
| at 60 °C  | $I_{th} = I_e$ | A | 855  |
| enclosed  | $I_{th}$       | A | 800  |
| Conventional free air thermal current, 1 pole             |                |   |  |
| Note  |                |   | at maximum permissible ambient air temperature |
| open  | $I_{th}$       | A | 2138   |

## Current heat loss

|                           |  |   |     |
|---------------------------|--|---|-----|
| 3 pole, at $I_{th}$ (60°) |  | W | 100 |
|---------------------------|--|---|-----|

## Magnet systems

|  |          |      |  |
|--|----------|------|--|
| Voltage tolerance  |          |      |  |
| $U_S$  |          |      | 220 - 240 V 50/60 Hz                             |
| AC operated  | Pick-up  |      | $0.85 \times U_{S \min} - 1.1 \times U_{S \max}$ |
| AC operated  | Drop-out |      | $0.2 \times U_{S \min} - 0.4 \times U_{S \max}$  |
| Power consumption of the coil in a cold state and $1.0 \times U_S$                                     |          |      |  |
| Note on power consumption  |          |      | Control transformer with $u_k \leq 7\%$          |
| Pull-in power  | Pick-up  | VA   | 715  |
| Pull-in power  | Pick-up  | W    | 645  |
| Sealing power  | Sealing  | VA   | 4.3  |
| Sealing power  | Sealing  | W    | 3.3  |
| Duty factor  |          | % DF | 100  |
| Changeover time at 100 % $U_S$ (recommended value)   |          |      |  |
| Main contacts  |          |      |  |
| Closing delay  |          | ms   | 60   |
| Opening delay  |          | ms   | 50   |
| Behaviour in marginal and transitional conditions  |          |      |  |
| Sealing  |          |      |  |
| Voltage interruptions  |          |      |  |
| $(0 \dots 0.2 \times U_{c \min}) \leq 10 \text{ ms}$   |          |      | Time is bridged specifically                     |
| $(0 \dots 0.2 \times U_{c \min}) > 10 \text{ ms}$  |          |      | Contactors drop-out                              |
| Voltage drops  |          |      |  |
| $(0.2 \dots 0.6 \times U_{c \min}) \leq 12 \text{ ms}$   |          |      | Time is bridged specifically                     |
| $(0.2 \dots 0.6 \times U_{c \min}) > 12 \text{ ms}$  |          |      | Contactors drop-out                              |
| $(0.6 \dots 0.7 \times U_{c \min})$  |          |      | Contactors remains switched on                   |
| Excess voltage   |          |      |  |
| $(1.15 \dots 1.3 \times U_{c \max})$   |          |      | Contactors remains switched on                   |
| Pick-up phase  |          |      |  |
| $(0 \dots 0.7 \times U_{c \min})$  |          |      | Contactors does not switch on                    |
| $(0.7 \times U_{c \min} \dots 1.15 \times U_{c \max})$   |          |      | Contactors switches on properly                  |
| Admissible transitional contact resistance (of the external control circuit device when actuating A11) |          | mΩ   | $\leq 500$                                       |
| PLC signal level (A3 - A4) to IEC/EN 61131-2 (type 2)  |          |      |  |
| High   |          | V    | 15   |
| Low  |          | V    | 5  |

## Electromagnetic compatibility (EMC)

|                               |  |  |   |
|-------------------------------|--|--|---|
| Electromagnetic compatibility |  |  | This product has been designed for use in the industrial sector (Environment A). Use in the residential area (Environment B) can produce radio interference, therefore additional interference suppression measures must be provided. |
|-------------------------------|--|--|---|

## Rating data for approved types

|                                    |   |  |      |
|------------------------------------|---|--|------|
| Auxiliary contacts                 |   |  |      |
| Pilot Duty                         |   |  |      |
| AC operated                        |   |  | A600 |
| DC operated                        |   |  | P300 |
| General Use                        |   |  |      |
| AC                                 | V |  | 600  |
| AC                                 | A |  | 6    |
| DC                                 | V |  | 250  |
| DC                                 | A |  | 1    |
| Special Purpose Ratings            |   |  |      |
| Resistance Air Heating             |   |  |      |
| 480V 60Hz 3phase, 277V 60Hz 1phase | A |  | 800  |
| 600V 60Hz 3phase, 347V 60Hz 1phase | A |  | 800  |

## Design verification as per IEC/EN 61439

|  |            |    |  |
|--|------------|----|--|
| Technical data for design verification   |            |    |  |
| Rated operational current for specified heat dissipation   | $I_n$      | A  | 800  |
| Equipment heat dissipation, current-dependent  | $P_{vid}$  | W  | 0  |
| Static heat dissipation, non-current-dependent   | $P_{vs}$   | W  | 3.3  |
| Heat dissipation capacity  | $P_{diss}$ | W  | 0  |
| Operating ambient temperature min.   |            | °C | -40  |
| Operating ambient temperature max.   |            | °C | 70   |
| IEC/EN 61439 design verification   |            |    |  |
| 10.2 Strength of materials and parts   |            |    |  |
| 10.2.2 Corrosion resistance  |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |            |    |  |
|  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |            |    |  |
|  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |            |    |  |
|  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |            |    |  |
|  |            |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |            |    |  |
|  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |            |    |  |
|  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |            |    |  |
|  |            |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |            |    |  |
|  |            |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |            |    |  |
| 10.9.2 Power-frequency electric strength   |            |    |  |
|  |            |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |            |    |  |
|  |            |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |            |    |  |
|  |            |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |            |    |  |
|  |            |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |            |    |  |
|  |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |            |    |  |
|  |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |            |    |  |
|  |            |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 8.0


|   |   |           |
|---|---|-----------|
| Low-voltage industrial components (EG000017) / Power contactor, AC switching (EC000066)   |   |           |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss10.0.1-27-37-10-03 [AAB718015]) |   |           |
| Rated control supply voltage $U_s$ at AC 50HZ   | V | 220 - 240 |


|   |    |                 |
|---|----|-----------------|
| Rated control supply voltage Us at AC 60HZ              | V  | 220 - 240       |
| Rated control supply voltage Us at DC                   | V  | 0 - 0           |
| Voltage type for actuating                              |    | AC              |
| Rated operation current Ie at AC-1, 400 V               | A  | 1020            |
| Rated operation current Ie at AC-3, 400 V               | A  | 0               |
| Rated operation power at AC-3, 400 V                    | kW | 0               |
| Rated operation current Ie at AC-4, 400 V               | A  | 0               |
| Rated operation power at AC-4, 400 V                    | kW | 0               |
| Rated operation power NEMA                              | kW | 0               |
| Modular version   |    | No              |
| Number of auxiliary contacts as normally open contact   |    | 2               |
| Number of auxiliary contacts as normally closed contact |    | 2               |
| Type of electrical connection of main circuit           |    | Rail connection |
| Number of normally closed contacts as main contact      |    | 0               |
| Number of normally open contacts as main contact        |    | 3               |

## Approvals

|                                      |  |  |
|--------------------------------------|--|--|
| Product Standards                    |  | IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking |
| UL File No.                          |  | E29096   |
| UL Category Control No.              |  | NLDX   |
| CSA File No.                         |  | 012528   |
| CSA Class No.                        |  | 3211-04  |
| North America Certification          |  | UL listed, CSA certified   |
| Specially designed for North America |  | No   |


## Characteristics

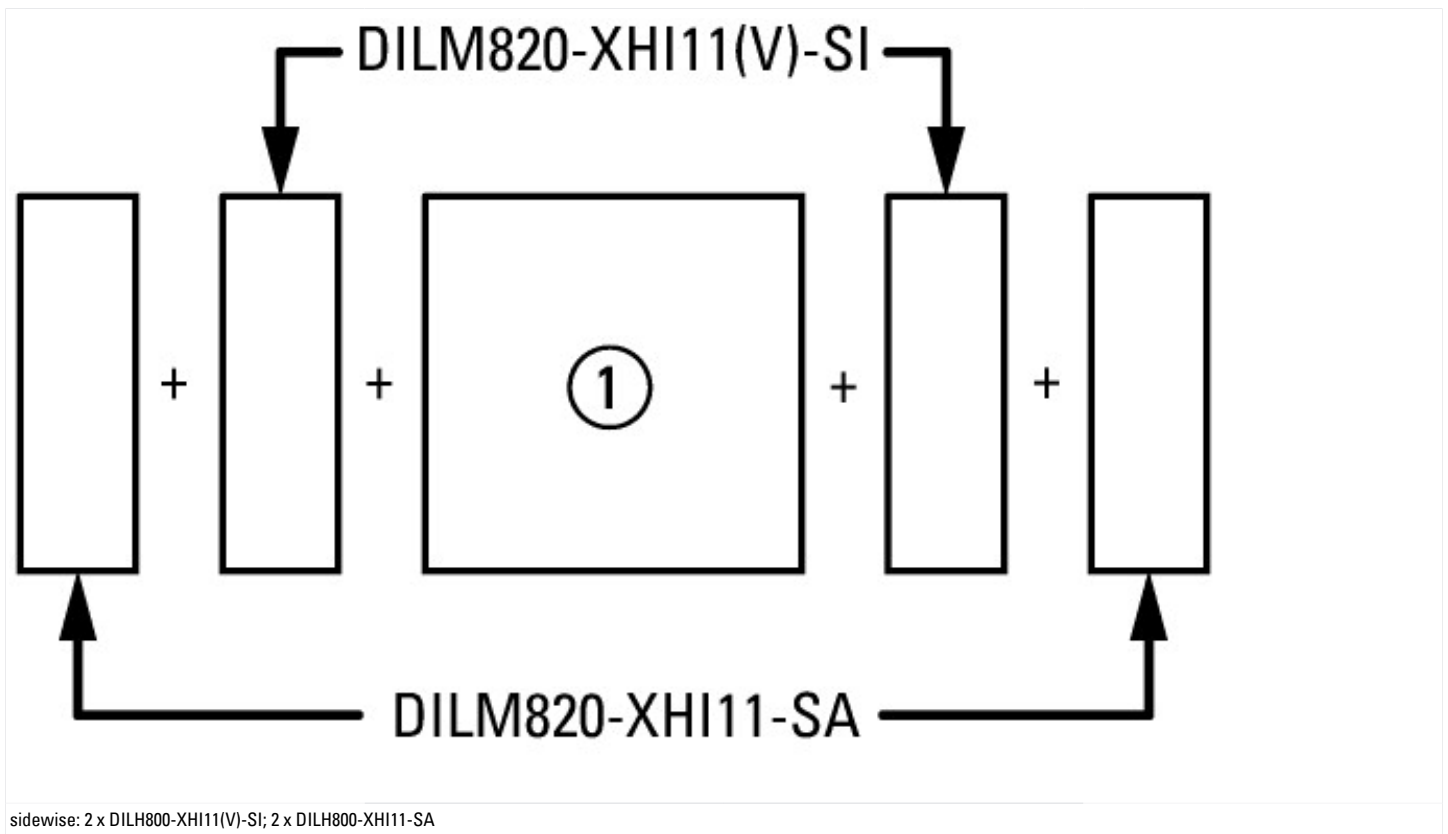

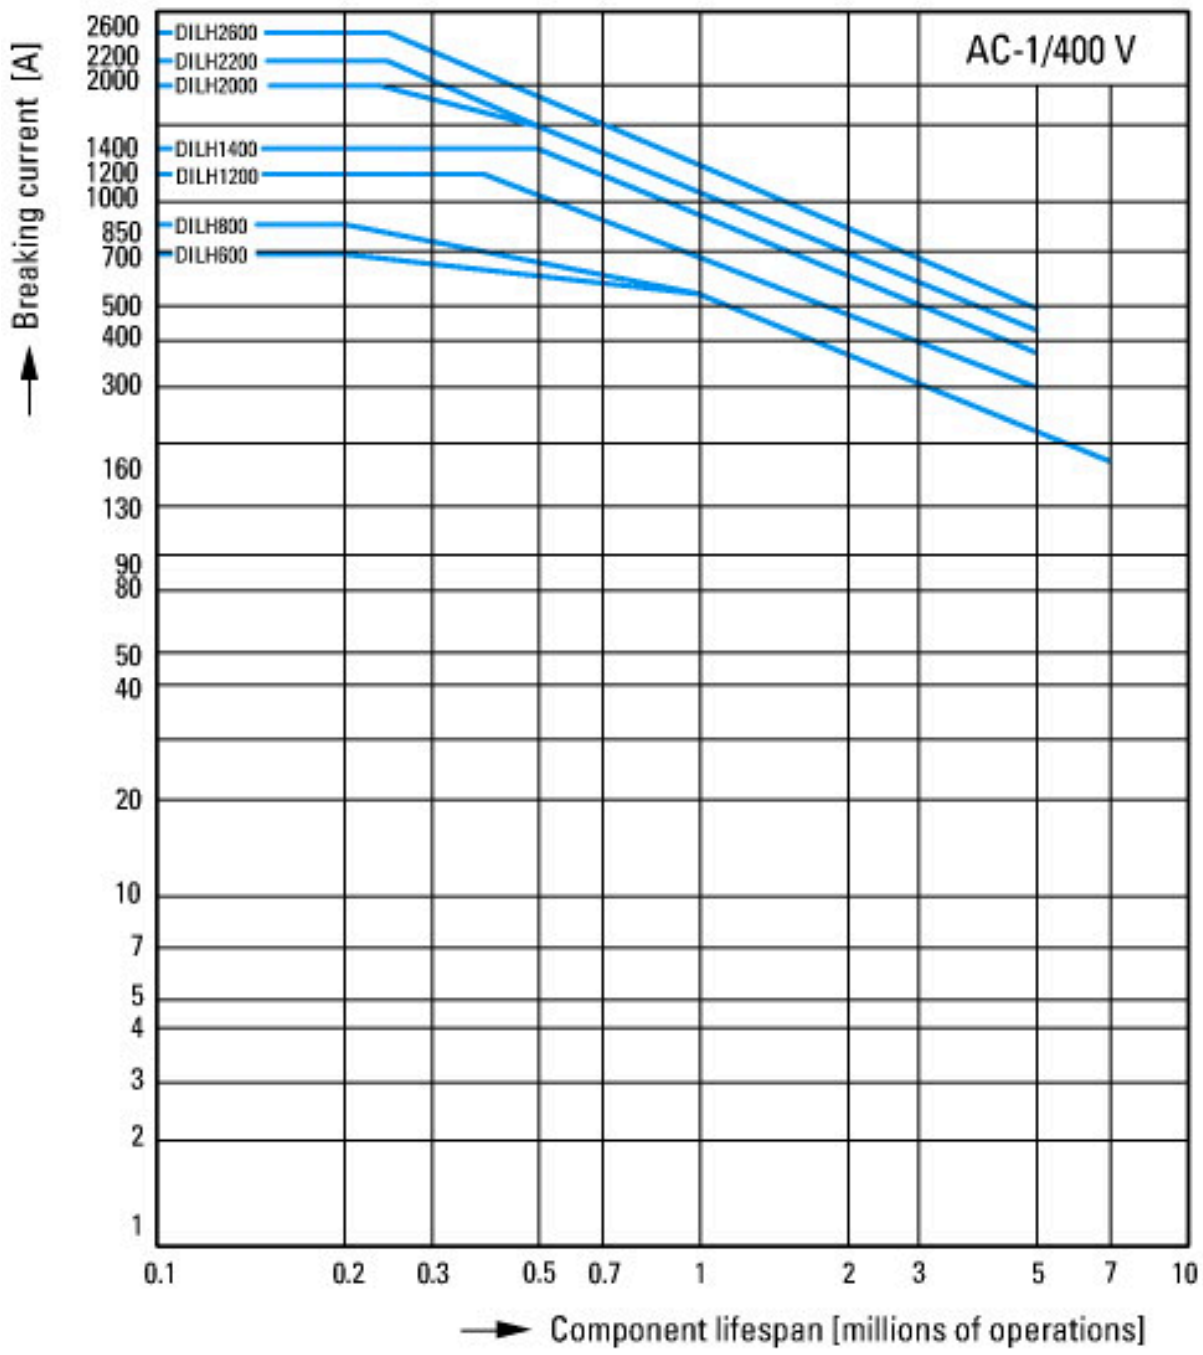

Component lifespan DILH1200 - DILH2600  $\leq$  1000 V

Electrical lifespan AC-1

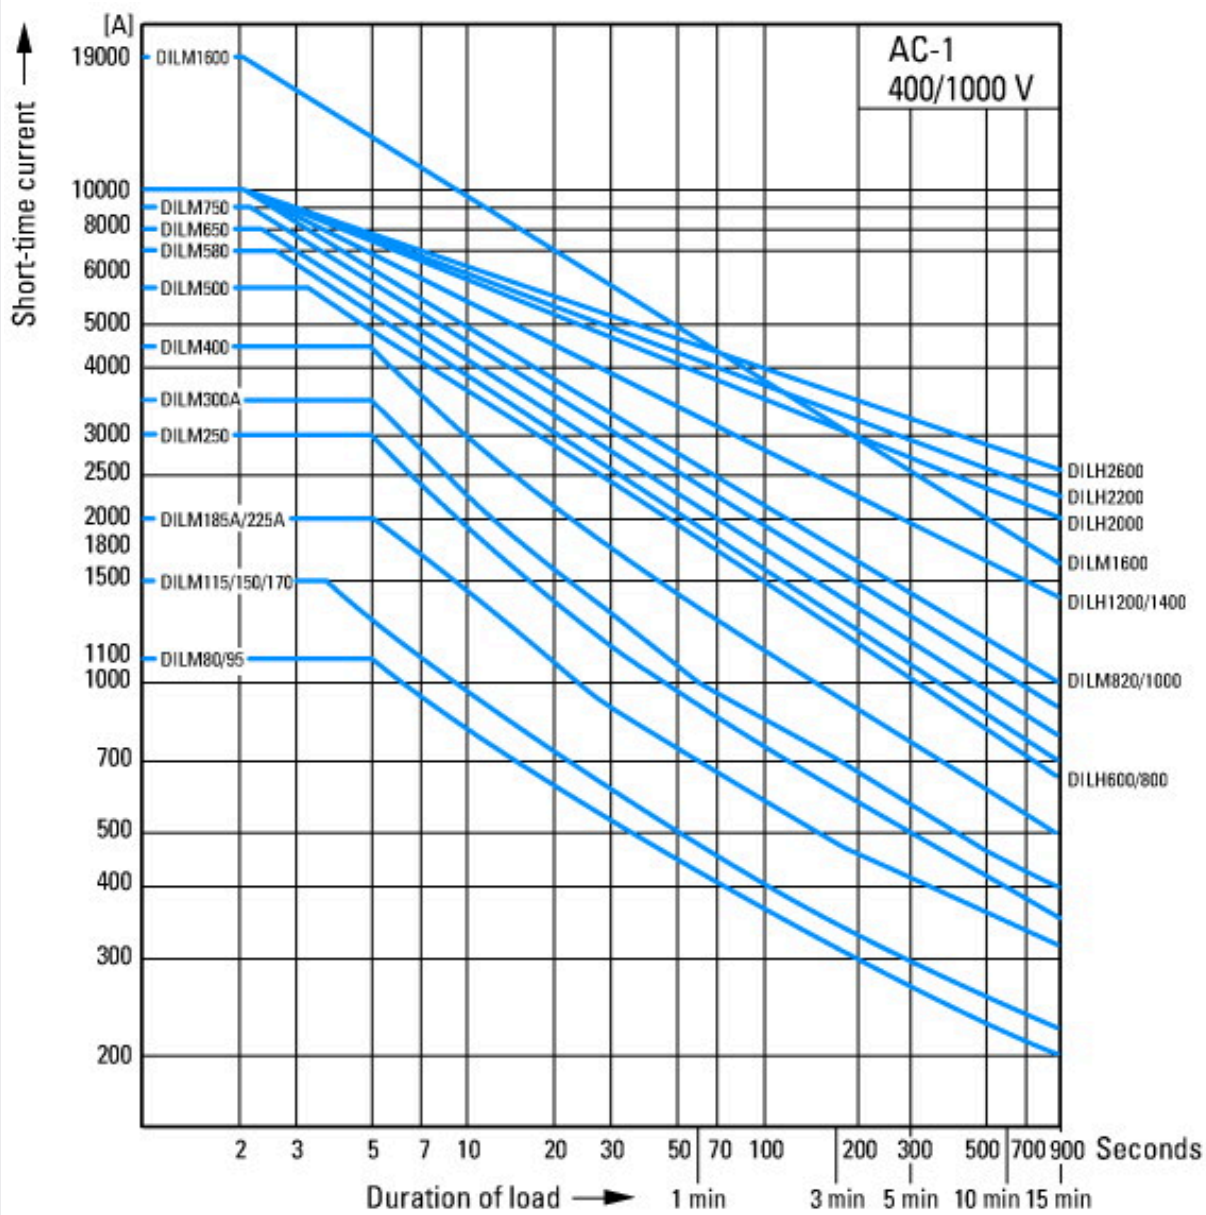

Short-time loading, 3-pole  
Time interval between two loading cycles: 15 minutes

## Dimensions

