



Flange, closed, HxWxD=116x250x23mm

Part no. FL3-X
Catalog No. 093171

EL-Nummer (Norway) 4132064


Delivery program

| | | | |
|-----------------------------------|--|--|---|
| | | | |
| Product range | | | xEnergy Safety Ci |
| Basic function | | | Basic enclosures |
| Product function | | | Accessories for basic enclosures |
| Accessories | | | Flanges |
| Single unit/Complete unit | | | Modular system |
| Description | | | sponge-rubber, captive gasket Quick mounting using wedge-lock fasteners (included as standard) |
| For use with enclosure dimensions | | | 250 mm |
| Cable entry | | | Drill as required |

Technical data ETIM 7.0

| | | | |
|--|--|----|-----------|
| Distribution boards (EG000023) / Gland plate for small distribution boards/switchgear cabinets (EC0000211) | | | |
| Electric engineering, automation, process control engineering / Electrical installation, device / Electrical distribution system (incl. small distribution board) / Gland plate for small distribution boards/switchgear cabinets (ecl@ss10.0.1-27-14-24-21 [ADI315007]) | | | |
| Model | | | Blind |
| Type | | | Straight |
| Width | | mm | 204 |
| Height | | mm | 116 |
| Depth | | mm | 23 |
| Material | | | Plastic |
| Surface protection | | | Untreated |
| Degree of protection (NEMA) | | | Other |
| Pre-stamping | | | No |
| Number of connector holes | | | 0 |
| Thread type | | | None |
| Suitable for nominal thread metric/PG | | | 16 - 50 |

Dimensions

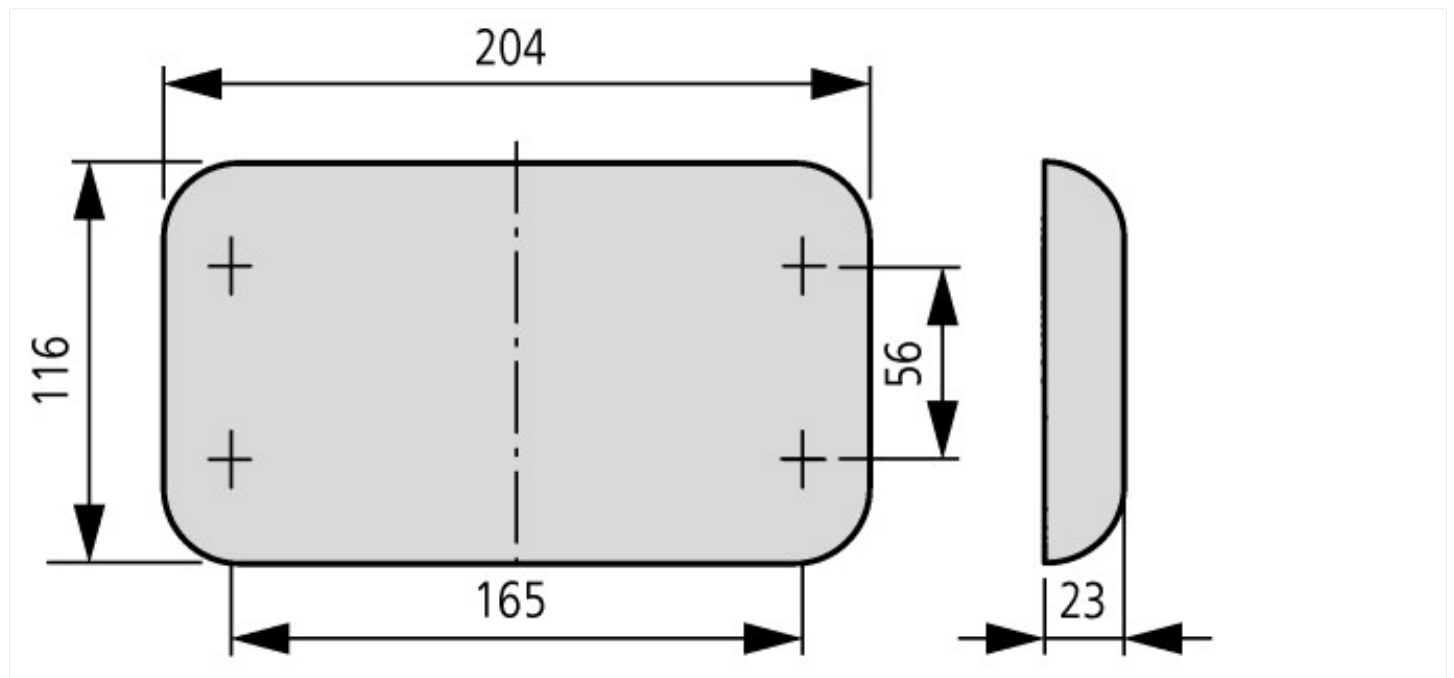

Additional product information (links)

| | |
|---|---|
| allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Renderit | http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&model certification xEnergy Safety Ci |
| allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Renderit | http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&Save time – we assist you with expert pre-assembly |
| allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Renderit | http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&product information xEnergy Safety Ci |
| tool for calculating the power loss for switching device combinations | http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/TCTool/index.htm |
| configurator - xEnergy family | http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/xEnergyMainSupport/index.htm |