

**Cassette 2500A, IZMX404 without control cable connection**

**Part no.** IZMX-CAS404-2500-1  
**Catalog No.** 183961  
**Alternate Catalog No.** 67C2762A51  
**EL-Nummer (Norway)** 4398370

**Delivery program**

Product range			Accessories
Accessories			Withdrawable units
Accessories			Cassettes
			Equipment supplied: arcing chamber cover
Rated current	$I_n$	A	2500
Pole			4
For use with			IZMX40...4-...W INX40...4-...W
<b>Instructions</b>			Without terminal blocks for the control circuit terminals. Please order the required quantity separately.
Information about equipment supplied			with arcing chamber cover
Installation type			Withdrawable


**Design verification as per IEC/EN 61439**

Technical data for design verification			
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70

**Technical data ETIM 7.0**

Low-voltage industrial components (EG000017) / Chassis part power circuit breaker (EC002043)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Chassis part circuit breaker (ecl@ss10.0.1-27-37-04-22 [ACN955011])			
Rated current $I_n$		A	2500
Number of poles			4
Version as busbar adapter			No
Version as built-in device			Yes
Type of electrical connection of main circuit			Rail connection

## Dimensions

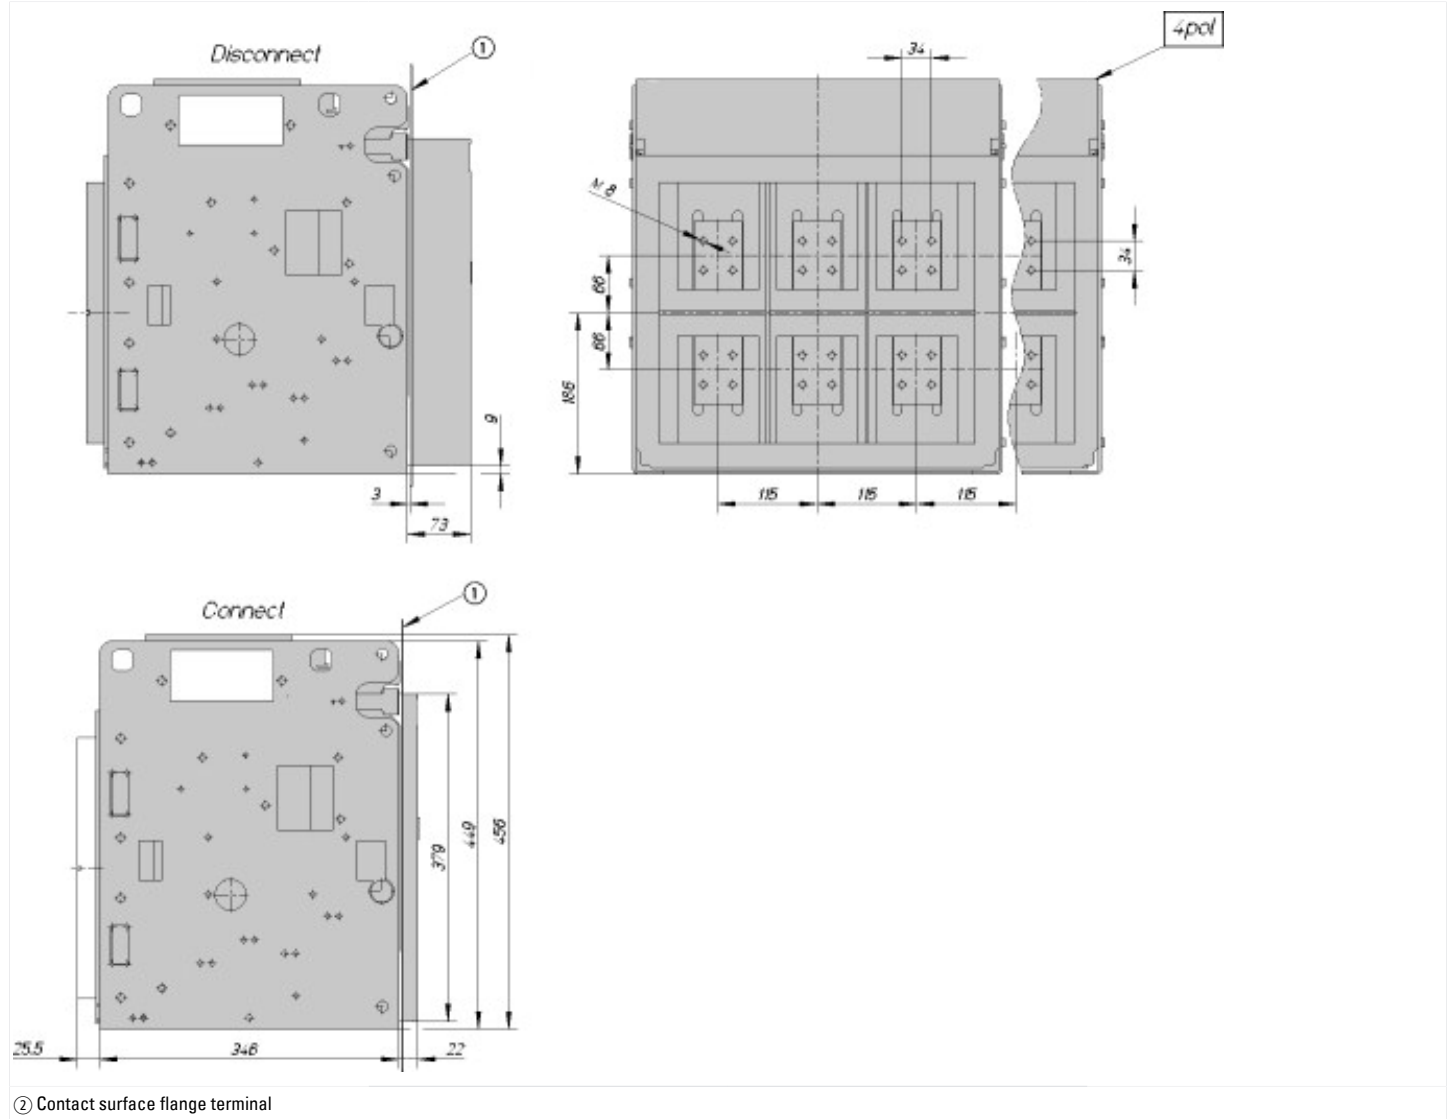

② Contact surface flange terminal