

Select your language

- German
- English
- Spanish
- French
- Dutch
- Italian
- Polish
- Czech
- Russian
- Norwegian Bokmål

Worldwide English




ZMX-M16-24DC-1 - Motor operator 24 VDC



184246 IZMX-M16-24DC-1

[Overview](#) [Specifications](#) [Resources](#)

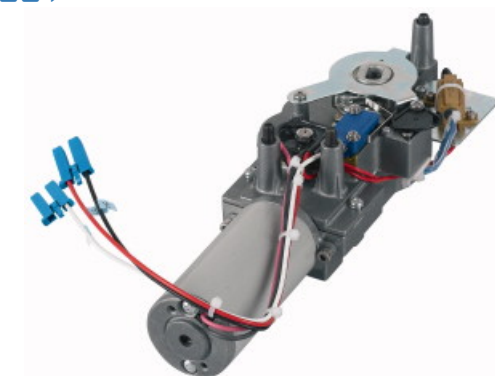

184246 IZMX-M16-24DC-1

Motor operator 24 VDC

Alternate Catalog No.

67C3048G31

EL-Nummer (Norway)

4398589

Accessories, Motor operator, The motor automatically tensions the spring force storage mechanism for remote or local actuation., Retrofitting kit, Maximum operating frequency Actuations/minute 3, Please note - the circuit-breaker's switching frequency = 60/h, Rated control voltage U_s 24 V DC V, Operating range $\times U_s$ 0,85 - 1,1 Factor, max. Betriebsstrom I_n 5 A, max. Anlaufstrom (35ms) I_n 25 A, max. Leistung AC/DC 150 VAW, max. Anlaufleistung (35ms) AC/DC 3 VAW, For use with IZMX16..., INX16...

- Delivery program
- Technical data
- Design verification as per IEC/EN 61439
- Technical data ETIM 7.0

Delivery program

Product range

Accessories

Accessories

Remote switching

Accessories

Motor operator

The motor automatically tensions the spring force storage mechanism for remote or local actuation.

Retrofitting kit

Maximum operating frequency [Actuations/minute]

3

Please note - the circuit-breaker's switching frequency = 60/h

Rated control voltage [U_s]

24 V DC V

Operating range [$\times U_s$]

0,85 - 1,1 Factor

For use with

IZMX16...

INX16...

Instructions

The retrofit kit includes the required SEC control cable terminals.

Information about equipment supplied

A signaling switch "Spring-operated stored energy mechanism tensioned" message is included as standard.

Technical data

Necessary time required for charging the spring-operated stored energy mechanism at $1 \times U_s$

4 s DC

Rated operational current [I_n]

6 A DCA

Starting current
20 A DCA
Power consumption
160 WDC

Design verification as per IEC/EN 61439

Operating ambient temperature min.
-25 °C
Operating ambient temperature max.
+70 °C

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Motor operator for power circuit-breaker (EC001030)
Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Electrical drive for circuit breakers (ecl@ss10.0.1-27-37-04-12 [AKF010013])
Type of switch drive
Motor drive
Rated control supply voltage Us at AC 50HZ
0 - 0 V
Rated control supply voltage Us at AC 60HZ
0 - 0 V
Rated control supply voltage Us at DC
24 - 24 V
Voltage type for actuating
DC

Product photo



sg05516
Photo

3D drawing



1230DRW-849
Line drawing

CAD data


edz files


- [DA-CE-ETN.IZMX-M16-24DC-1](#)
File
(Web)

Download-Center

- [Download-Center \(this item\)](#)
Eaton EMEA Download-Center - download data for this item
- [Download-Center](#)
Eaton EMEA Download-Center

 [Generate data sheet in PDF format](#)

 [Generate data sheet in Excel format](#)

 [Write a comment](#)

