

Select your language

- German
- English
- Spanish
- French
- Dutch
- Italian
- Polish
- Czech
- Russian
- Norwegian Bokmål

Worldwide English




IZMX-ST24DC-1 - Shunt release 24 VDC



184266 IZMX-ST24DC-1

[Overview](#) [Specifications](#) [Resources](#)

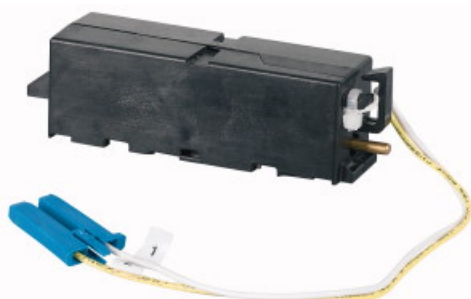

## 184266 IZMX-ST24DC-1

Shunt release 24 VDC

Alternate Catalog No.

67C2820G63

EL-Nummer (Norway)

4398609

Accessories, Shunt release (for power circuit breaker), Can be combined with an undervoltage release or a second shunt release., Retrofitting kit, Maximum operating frequency Actuations/minute 3, Limited to 3/min due to the high pick-up current for 35 ms., Please note - the circuit-breaker's switching frequency = 60/h, Rated control voltage  $U_s$  24 V DC V, Operating range x  $U_s$  0,7 - 1,1 Factor, max. holding current In 0.18 A, max. pick-up current (35ms) In 19 A, max. continuous power AC/DC 5 VA/W, max. pull-in power (35ms) AC/DC 500 VA/W, Circuit-breaker total switching time @  $U_s=100\%$  30 (IZMX16..., INX16...), 35 (IZMX40..., INX40...) ms, For use with IZMX16..., IZMX40..., INX16..., INX40...

- Delivery program
- Design verification as per IEC/EN 61439
- Technical data ETIM 7.0

### Delivery program

Product range

Accessories

Accessories

Remote switching

Accessories

Shunt release (for power circuit breaker)

Can be combined with an undervoltage release or a second shunt release.

Retrofitting kit

Maximum operating frequency [Actuations/minute]

3

Limited to 3/min due to the high pick-up current for 35 ms.

Please note - the circuit-breaker's switching frequency = 60/h

Rated control voltage [ $U_s$ ]

24 V DC V

Operating range [x  $U_s$ ]

0,7 - 1,1 Factor

max. holding current [ $I_h$ ]

0.18 A

max. pick-up current (35ms) [ $I_h$ ]

19 A

max. continuous power [AC/DC]

5 VA/W

max. pull-in power (35ms) [AC/DC]

500 VA/W

Circuit-breaker total switching time [@  $U_s=100\%$ ]

30 (IZMX16..., INX16...)

35 (IZMX40..., INX40...) ms

For use with

IZMX16..., IZMX40...

INX16..., INX40...

### Instructions

The retrofit kit includes the required SEC control cable terminals.

## Design verification as per IEC/EN 61439

Operating ambient temperature min.

-25 °C

Operating ambient temperature max.

+70 °C

## Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Shunt release (for power circuit breaker) (EC001023)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Full load current trip (ecl@ss10.0.1-27-37-04-18 [AKF016013])

Rated control supply voltage  $U_s$  at AC 50HZ

0 - 0 V

Rated control supply voltage  $U_s$  at AC 60HZ

0 - 0 V

Rated control supply voltage  $U_s$  at DC

24 - 24 V

Voltage type for actuating

DC

Initial value of the undelayed short-circuit release - setting range

0 A

End value adjustment range undelayed short-circuit release

0 A

Type of electric connection

Flat plug-in connection

Number of contacts as normally open contact

0

Number of contacts as normally closed contact

0

Number of contacts as change-over contact

0

Suitable for power circuit breaker

Yes

Suitable for off-load switch

Yes

Suitable for motor safety switch

No

Suitable for overload relay

No

## Product photo




sg05916

Photo

Shunt releases

## 3D drawing



1230DRW-852

Line drawing

## CAD data

edz files

- [DA-CE-ETN.IZMX-ST24DC-1](#)  
File  
(Web)

## Download-Center

- [Download-Center \(this item\)](#)  
Eaton EMEA Download-Center - download data for this item
- [Download-Center](#)  
Eaton EMEA Download-Center



[Generate data sheet in PDF format](#)



[Generate data sheet in Excel format](#)



[Write a comment](#)

[Imprint](#) [Privacy Policy](#) [Legal Disclaimer](#) [Terms and Conditions](#)

© 2022 by Eaton Industries GmbH

