
SIEMENS

Data sheet 3RR2242-1FW30

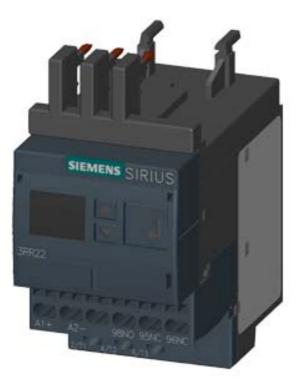

MONITORING RELAY ATTACHABLE TO
CONTACTOR 3RT2. SIZE S0 STANDARD, DIGITAL
ADJUSTABLE APPARENT/ACTIVE CURRENT MONIT.
4 - 40A, 20-400 HZ, 3-PHASE SUPPLY 24-240 V
AC/DC 1 CO CONTACT, 1 SEMICOND. FOR ALARM
AND WARNING MONITORING FOR CURRENT
OVERSHOOT/UNDERSHOOT PHASE FAILURE,
WIRE BREAK PHASE SEQUENCE FAULT CURRENT
BLOCKING CURRENT WARNING AND ALARM
THRESHOLDS WITH OR W/O ERROR LOG ONDELAY 0-99 S SPURIOUS PEAK SUPPR.0-30 S
BREAK AFTER FAULT 0-300 MIN SCREW
CONNECTION

General technical data:		
product brandname		SIRIUS
Product designation		Monitoring relays
Design of the product		digitally adjustable, 3-phase current monitoring
Size of contactor can be combined company-specific		S0
Protection class IP		
• on the front		IP20
 of the terminal 		IP20
Insulation voltage for overvoltage category III	V	690
according to IEC 60664 with degree of pollution 3		
rated value		
Installation altitude at height above sea level	m	2 000
maximum		
Ambient temperature		
during storage	°C	-40 +80
during operation	°C	-25 +60
Electromagnetic compatibility		IEC 60947-1 / IEC 61000-6-2 / IEC 61000-6-4
EMI immunity acc. to IEC 60947-1		ambience A (industrial sector)
EMC emitted interference acc. to IEC 60947-1		ambience A (industrial sector)

Shock resistance		15g / 11 ms
Vibration resistance		10 55 Hz / 0.35 mm
Surge voltage resistance rated value	kV	6
Operating apparent output rated value	V·A	4
Operating power rated value	W	2.5
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		К
Equipment marking acc. to DIN EN 61346-2		К
Mechanical service life (switching cycles) typical		10 000 000
Electrical endurance (switching cycles) at AC-15 at 230 V typical		100 000
Accuracy of digital display		+/-1 digit
Adjustable response delay time		
when starting	s	0 99
 with lower or upper limit violation 	S	0 30
Stand-by time for restart after fault	S	0.2
Phase number		3
Number of monitored phases		3
Product function		
 Overcurrent monitoring 		Yes
 Undercurrent monitoring 		Yes
 Overcurrent and undercurrent monitoring 		Yes
 Apparent current monitoring 		Yes
 active current monitoring 		Yes
 undercurrent detection DC 		No
 undercurrent detection 1 phase 		No
Overcurrent detection DC		No
 Current window recognition DC 		No
 undercurrent detection 3 phases 		Yes
Overcurrent detection 1 phase		No
 Voltage window recognition 3 phase 		No
 Voltage window recognition 1 phase 		No
 phase sequence recognition 		Yes
 can be activated or deactivated phase sequence recognition 		Yes
Auto-reset		Yes
External reset		No
Manual RESET		Yes
Adjustable pick-up value current		
• 1	Α	4 40
• 2	Α	4 40
Factor as multiple of the current monitoring upper limit for the adjustable value of a blocking current		25

Response value residual current detection at 50/60 Hz typical	А	4
Relative metering precision		
 relating to measured value 	%	5
Type of current for monitoring		AC
Measurable current at AC	Α	4 40
Adjustable switching hysteresis for measured current value	Α	0.1 8
Response time maximum	ms	200
Relative repeat accuracy	%	2
Temperature drift per °C	%/°C	0.1
Ampacity		
 for permanent overcurrent maximum permissible 	Α	40
 for overcurrent duration < 1 s maximum permissible 	Α	800

Supply voltage:		
Type of voltage of the supply voltage		AC/DC
Supply voltage frequency 1	Hz	50 60
Supply voltage 1		
• at DC	V	24 240
• at AC		
— at 50 Hz	V	24 240
— at 60 Hz	V	24 240
Buffering time in the event of power failure minimum	ms	10

Auxiliary circuit:		
Circuit principle of the output relay		closed-circuit current / open-circuit current
Operating current at 17 V minimum	mA	5
Number of outputs as contact-less semiconductor switching element for signaling function instantaneous contact		1
Ampacity of the semiconductor output		
● at DC-13 at 240 V	mA	20
● at AC-14 at 240 V at 50/60 Hz	mA	20
Residual current of the semiconductor output maximum	mA	0.035
Number of CO contacts	_	
• for auxiliary contacts		1
Operating current of auxiliary contacts		
● at AC-15		
— at 24 V	Α	3
— at 230 V	Α	3
— at 400 V	Α	3

• at DC-13		
— at 24 V	Α	1
— at 125 V	Α	0.2
— at 250 V	Α	0.1

Inputs/ Outputs:

Short-circuit:

Installation/ mounting/ dimensions:		
Mounting position		any
Mounting type		direct mounting
Width	mm	45
Height	mm	87
Depth	mm	91
Required spacing with side-by-side mounting		
• forwards	mm	0
Backwards	mm	0
• upwards	mm	0
• downwards	mm	0
• at the side	mm	0
Required spacing for grounded parts		
• forwards	mm	6
Backwards	mm	0
• upwards	mm	6
• downwards	mm	6
• at the side	mm	6
Required spacing for live parts		
• forwards	mm	6
Backwards	mm	0
• upwards	mm	6
• downwards	mm	6
• at the side	mm	6

Connections/ Terminals:

Type of electrical connection	
for main current circuit	screw-type terminals
 for auxiliary and control current circuit 	screw-type terminals
Product function	
 removable terminal for main circuit 	No
 removable terminal for auxiliary and control circuit 	Yes
Type of connectable conductor cross-sections	
• for main contacts	

— solid
 — finely stranded
 — with core end processing
 • at AWG conductors
 — for main contacts
 — for auxiliary contacts
 — solid
 — solid
 — finely stranded

2x (1 ... 2.5 mm²), 2x (2.5 ... 6 mm²), 1x 10 mm²
2 x (16 ... 14), 2x (14 ... 8)
2x (20 ... 14)
1x (0.5 ... 4 mm²), 2x (0.5 ... 2.5 mm²)
1x (0.5 ... 4 mm²), 2x (0.5 ... 2.5 mm²)

 $N \cdot m$

	0.	rovo	Oppi	otool	Cartifica
Certificates/ approval	5.	viova	appi	<i>เ</i> สเษร/	Cerunica

Certificate of suitability CE / UL / CSA

General Product Approval

EMC

1x (0.5 ... 2.5 mm²), 2x (0.5 ... 1.5 mm²)

Declaration of Conformity





- with core end processing

Tightening torque with screw-type terminals





0.8 ... 1.2





Test Certificates

Shipping Approval

Type Test
Certificates/Test
Report

Special Test Certificate









Shipping Approval

other





Environmental Confirmations

Confirmation

UL/CSA ratings:

Contact rating of auxiliary contacts according to UL B300 / R300

Safety related data

Protection against electrical shock finger-safe

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)


http://www.siemens.com/industrymall


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RR2242-1FW30

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RR2242-1FW30

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RR2242-1FW30&lang=en

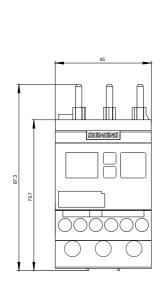

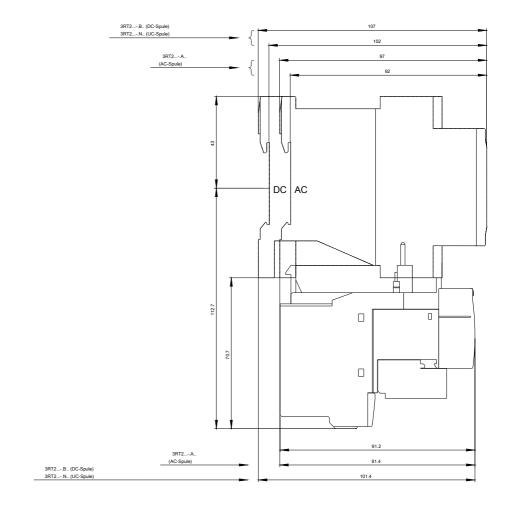

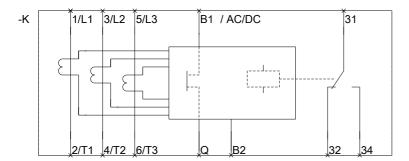

MOIMCOR

last modified: 05/31/2017