# **SIEMENS**

## Data sheet

### 3RT1064-6NB36

CONTACTOR, 110KW/400V/AC-3 AC(50...60HZ)/DC OPERATION UC 21-27.3V AUXILIARY CONTACTS 2NO+2NC 3-POLE, SIZE S10 BAR CONNECTIONS ELECTRONIC OPERATING MECHANISM WITH 24V DC PLC INTERFACE SCREW TERMINAL



Figure similar

Product brand name	SIRIUS
Product designation	Power contactor
Product type designation	3RT1
General technical data	
Size of contactor	S10
Product extension	
<ul> <li>function module for communication</li> </ul>	No
Auxiliary switch	Yes
Insulation voltage	
• rated value	1 000 V
Degree of pollution	3
Surge voltage resistance rated value	8 kV
maximum permissible voltage for safe isolation	
<ul> <li>between coil and main contacts acc. to EN</li> </ul>	690 V
60947-1	
Protection class IP	
• on the front	IP00

• of the terminal	IP00		
Shock resistance at rectangular impulse			
• at AC	8,5g / 5 ms, 4,2g / 10 ms		
• at DC	8,5g / 5 ms, 4,2g / 10 ms		
Shock resistance with sine pulse			
• at AC	13,4g / 5 ms, 6,5g / 10 ms		
• at DC	13,4g / 5 ms, 6,5g / 10 ms		
Mechanical service life (switching cycles)			
<ul> <li>of contactor typical</li> </ul>	10 000 000		
<ul> <li>of the contactor with added electronics- compatible auxiliary switch block typical</li> </ul>	5 000 000		
<ul> <li>of the contactor with added auxiliary switch block typical</li> </ul>	10 000 000		
Ambient conditions			
Ambient temperature			
<ul> <li>during operation</li> </ul>	-25 +60 °C		
• during storage	-55 +80 °C		
Main circuit			
Number of poles for main current circuit	3		
Number of NO contacts for main contacts	3		
Operating voltage			
<ul> <li>at AC-3 rated value maximum</li> </ul>	1 000 V		
Operating current			
• at AC-1 at 400 V			
— at ambient temperature 40 °C rated value	275 A		
● at AC-1			
— up to 690 V at ambient temperature 40 °C rated value	275 A		
— up to 690 V at ambient temperature 60 °C rated value	250 A		
— up to 1000 V at ambient temperature 40 °C rated value	100 A		
— up to 1000 V at ambient temperature 60 °C rated value	100 A		
• at AC-2 at 400 V rated value	225 A		
• at AC-3			
— at 400 V rated value	225 A		
— at 500 V rated value	225 A		
— at 690 V rated value	225 A		
— at 1000 V rated value	68 A		
Connectable conductor cross-section in main circuit at AC-1			

• at 60 °C minimum permissible	120 mm <sup>2</sup>
• at 40 °C minimum permissible	150 mm <sup>2</sup>
Operating current for approx. 200000 operating	
cycles at AC-4	
• at 400 V rated value	96 A
• at 690 V rated value	85 A
Operating current	
<ul> <li>at 1 current path at DC-1</li> </ul>	
— at 24 V rated value	200 A
— at 110 V rated value	18 A
— at 220 V rated value	3.4 A
— at 440 V rated value	0.8 A
— at 600 V rated value	0.5 A
<ul> <li>with 2 current paths in series at DC-1</li> </ul>	
— at 24 V rated value	200 A
— at 110 V rated value	200 A
— at 220 V rated value	20 A
— at 440 V rated value	3.2 A
— at 600 V rated value	1.6 A
<ul> <li>with 3 current paths in series at DC-1</li> </ul>	
— at 24 V rated value	200 A
— at 110 V rated value	200 A
— at 220 V rated value	200 A
— at 440 V rated value	11 A
— at 600 V rated value	4 A
Operating current	
• at 1 current path at DC-3 at DC-5	
— at 24 V rated value	200 A
— at 110 V rated value	2.5 A
— at 220 V rated value	0.6 A
— at 440 V rated value	0.17 A
— at 600 V rated value	0.12 A
<ul> <li>with 2 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	200 A
— at 110 V rated value	200 A
— at 220 V rated value	2.5 A
— at 440 V rated value	0.65 A
— at 600 V rated value	0.37 A
<ul> <li>with 3 current paths in series at DC-3 at DC-5</li> </ul>	
— at 24 V rated value	200 A
— at 110 V rated value	200 A

value of magnet coil at AC	
Operating range factor control supply voltage rated	
rated value	21 27.3 V
Control supply voltage at DC	
at 60 Hz rated value	21 27.3 V
• at 50 Hz rated value	21 27.3 V
Control supply voltage at AC	
Type of voltage of the control supply voltage	AC/DC
Control circuit/ Control	
• at AC-4 maximum	130 1/h
• at AC-3 maximum	500 1/h
• at AC-2 maximum	250 1/h
• at AC-1 maximum	750 1/h
Operating frequency	
• at DC	2 000 1/h
• at AC	2 000 1/h
No-load switching frequency	
the operating current per conductor	
Power loss [W] at AC-3 at 400 V for rated value of	17 W
Thermal short-time current limited to 10 s	1 800 A
at 690 V rated value	82 kW
at 400 V rated value	54 kW
Operating power for approx. 200000 operating cycles at AC-4	
— at 1000 V rated value	90 kW
— at 690 V rated value	200 kW
— at 500 V rated value	160 kW
— at 400 V rated value	110 kW
— at 230 V rated value	73 kW
• at AC-3	
• at AC-2 at 400 V rated value	110 kW
— at 1000 V at 60 °C rated value	164 kW
— at 690 V at 60 °C rated value	283 kW
— at 690 V rated value	283 kW
— at 400 V at 60 °C rated value	164 kW
— at 400 V rated value	164 kW
— at 230 V at 60 °C rated value	94 kW
● at AC-1	
Operating power	
— at 600 V rated value	0.75 A
— at 440 V rated value	1.4 A

• at 50 Hz	0.8 1.1
• at 60 Hz	0.8 1.1
Design of the surge suppressor	with varistor
Apparent pick-up power of magnet coil at AC	
• at 50 Hz	530 V·A
Inductive power factor with closing power of the coil	
• at 50 Hz	0.8
Apparent holding power of magnet coil at AC	
• at 50 Hz	5 V·A
Inductive power factor with the holding power of the	
coil	
• at 50 Hz	0.5
Closing power of magnet coil at DC	580 W
Holding power of magnet coil at DC	3.4 W
Closing delay	
• at AC	45 80 ms
• at DC	45 80 ms
Opening delay	
• at AC	80 100 ms
• at DC	80 100 ms
Arcing time	10 15 ms
Auxiliary circuit	
Auxiliary circuit Number of NC contacts	
Number of NC contacts	2
<ul><li>Number of NC contacts</li><li>for auxiliary contacts</li></ul>	2
Number of NC contacts <ul> <li>for auxiliary contacts</li> <li>instantaneous contact</li> </ul>	2
for auxiliary contacts         — instantaneous contact      Number of NO contacts	2
Number of NC contacts         • for auxiliary contacts         — instantaneous contact         Number of NO contacts         • for auxiliary contacts	
Number of NC contacts <ul> <li>for auxiliary contacts</li> <li>instantaneous contact</li> </ul> <li>Number of NO contacts <ul> <li>for auxiliary contacts</li> <li>instantaneous contact</li> </ul> </li>	2
Number of NC contacts <ul> <li>for auxiliary contacts</li> <li>instantaneous contact</li> </ul> <li>Number of NO contacts <ul> <li>for auxiliary contacts</li> <li>instantaneous contact</li> </ul> </li> <li>Operating current at AC-12 maximum</li>	2
Number of NC contacts         • for auxiliary contacts         — instantaneous contact         Number of NO contacts         • for auxiliary contacts         — instantaneous contact         Operating current at AC-12 maximum         Operating current at AC-15	2 10 A
Number of NC contacts <ul> <li>for auxiliary contacts</li> <li>instantaneous contact</li> </ul> <li>Number of NO contacts <ul> <li>for auxiliary contacts</li> <li>instantaneous contact</li> </ul> </li> <li>Operating current at AC-12 maximum</li> <li>Operating current at AC-15 <ul> <li>at 230 V rated value</li> </ul> </li>	2 10 A 6 A
Number of NC contacts <ul> <li>for auxiliary contacts <ul> <li>instantaneous contact</li> </ul> </li> <li>Number of NO contacts <ul> <li>for auxiliary contacts</li> <li>for auxiliary contacts</li> <li>instantaneous contact</li> </ul> </li> <li>Operating current at AC-12 maximum</li> <li>Operating current at AC-15 <ul> <li>at 230 V rated value</li> <li>at 400 V rated value</li> </ul> </li> </ul>	2 10 A 6 A 3 A
Number of NC contacts <ul> <li>for auxiliary contacts</li> <li>instantaneous contact</li> </ul> <li>Number of NO contacts <ul> <li>for auxiliary contacts</li> <li>for auxiliary contacts</li> <li>instantaneous contact</li> </ul> </li> <li>Operating current at AC-12 maximum</li> <li>Operating current at AC-15 <ul> <li>at 230 V rated value</li> <li>at 400 V rated value</li> <li>at 500 V rated value</li> </ul> </li>	2 10 A 6 A 3 A 2 A
Number of NC contacts         • for auxiliary contacts         — instantaneous contact         Number of NO contacts         • for auxiliary contacts         — instantaneous contact         Operating current at AC-12 maximum         Operating current at AC-15         • at 230 V rated value         • at 500 V rated value         • at 690 V rated value	2 10 A 6 A 3 A 2 A
Number of NC contacts         • for auxiliary contacts         — instantaneous contact         Number of NO contacts         • for auxiliary contacts         — instantaneous contact         Operating current at AC-12 maximum         Operating current at AC-15         • at 230 V rated value         • at 500 V rated value         • at 500 V rated value         • at 690 V rated value         • at 690 V rated value	2 10 A 6 A 3 A 2 A 1 A
Number of NC contacts         • for auxiliary contacts         — instantaneous contact         Number of NO contacts         • for auxiliary contacts         — instantaneous contact         Operating current at AC-12 maximum         Operating current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 24 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A
Number of NC contacts • for auxiliary contacts — instantaneous contact Number of NO contacts • for auxiliary contacts — instantaneous contact Operating current at AC-12 maximum Operating current at AC-15 • at 230 V rated value • at 400 V rated value • at 400 V rated value • at 690 V rated value • at 690 V rated value • at 24 V rated value • at 48 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A
Number of NC contacts • for auxiliary contacts — instantaneous contact Number of NO contacts • for auxiliary contacts — instantaneous contact Operating current at AC-12 maximum Operating current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 500 V rated value • at 690 V rated value • at 48 V rated value • at 60 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A
Number of NC contacts         • for auxiliary contacts         — instantaneous contact         Number of NO contacts         • for auxiliary contacts         — instantaneous contact         Operating current at AC-12 maximum         Operating current at AC-15         • at 230 V rated value         • at 400 V rated value         • at 500 V rated value         • at 690 V rated value         • at 690 V rated value         • at 24 V rated value         • at 48 V rated value         • at 60 V rated value         • at 410 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 6 A 3 A
Number of NC contacts • for auxiliary contacts — instantaneous contact Number of NO contacts • for auxiliary contacts — instantaneous contact Operating current at AC-12 maximum Operating current at AC-15 • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value • at 690 V rated value • at 48 V rated value • at 4110 V rated value • at 110 V rated value • at 125 V rated value	2 10 A 6 A 3 A 2 A 1 A 10 A 6 A 6 A 3 A 2 A

Operating current at DC-13	
• at 24 V rated value	10 A
• at 48 V rated value	2 A
• at 60 V rated value	2 A
• at 110 V rated value	1 A
• at 125 V rated value	0.9 A
• at 220 V rated value	0.3 A
• at 600 V rated value	0.1 A
Contact reliability of auxiliary contacts	1 faulty switching per 100 million (17 V, 1 mA)

	ratings	
L.SA	raillios	
00/ (	raingo	

Full-load current (FLA) for three-phase AC motor	
• at 480 V rated value	180 A
• at 600 V rated value	192 A
Yielded mechanical performance [hp]	
<ul> <li>for three-phase AC motor</li> </ul>	
— at 200/208 V rated value	60 hp
— at 220/230 V rated value	75 hp
— at 460/480 V rated value	150 hp
— at 575/600 V rated value	200 hp
Contact rating of auxiliary contacts according to UL	A600 / Q600

Short-circuit protection	
Design of the fuse link	
<ul> <li>for short-circuit protection of the main circuit</li> </ul>	
- with type of coordination 1 required	Fuse gG: 500 A
— with type of assignment 2 required	Fuse gG: 400 A
<ul> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	fuse gG: 10 A

Mounting position	+/-180° rotation possible on vertical mounting surface; can be
	tilted forward and backward by +/- 22.5° on vertical mounting
	surface
Mounting type	screw fixing
<ul> <li>Side-by-side mounting</li> </ul>	Yes
Height	210 mm
Width	145 mm
Depth	202 mm
Required spacing	
<ul> <li>for grounded parts</li> </ul>	
— at the side	10 mm
Connections/Terminals	

Type of electrical connection

<ul> <li>for main current circuit</li> </ul>		screw-type terminals				
• for auxiliary and control current circuit		screw-type terminals	screw-type terminals			
Type of connectable of	conductor cross-se	ctions				
<ul> <li>at AWG conductors for main contacts</li> </ul>		2/0 500 kcmil				
Type of connectable of	Type of connectable conductor cross-sections					
<ul> <li>for auxiliary con</li> </ul>	<ul> <li>for auxiliary contacts</li> </ul>					
— solid			2x (0.5 1.5 mm²), 2	2x (0.75 2.5 mm²), ma	x. 2x (0.75 4 mm²)	
— single or m	ulti-stranded		2x (0,5 1,5 mm²), 2	2x (0,75 2,5 mm²), ma	x. 2x (0,75 4 mm²)	
— finely stran	ded with core end	processing	2x (0.5 1.5 mm²), 2	2x (0.75 2.5 mm²)		
<ul> <li>at AWG conduct</li> </ul>	tors for auxiliary co	ontacts	2x (20 16), 2x (18	14), 1x 12		
Safety related data						
Product function						
<ul> <li>Mirror contact a</li> </ul>	cc. to IEC 60947-4	-1	Yes			
<ul> <li>positively driven</li> </ul>	operation acc. to	IEC 60947-5-	No			
Protection against ele	ctrical shock		finger-safe when tou	ched vertically from front	acc. to IEC 60529	
Certificates/approval	S					
General Product				Functional	Declaration of	
				Safety/Safety	Conformity	
				of Machinery		
				Type Examination		
( <b>m</b> )	(SP		FAL	Certificate		
	CSA		LIIL		EG-Konf.	
	Con	0L				
Test Certificates		Marine / S	hipping			
Type Test	Special Test	SHICAN BURS		<b>₽</b> &	SUPSTRAVED AROS	
Certificates/Test Report	Certificate	* 0, * U		Ψ <b>Φ</b>		
		ABS	RMRS	DNV	DNVGL.COM/AF	
other						
Environmental	Confirmation	Miscellaneo	DUS			
Confirmations						

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs


Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1064-6NB36


#### Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1064-6NB36

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RT1064-6NB36

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RT1064-6NB36&lang=en

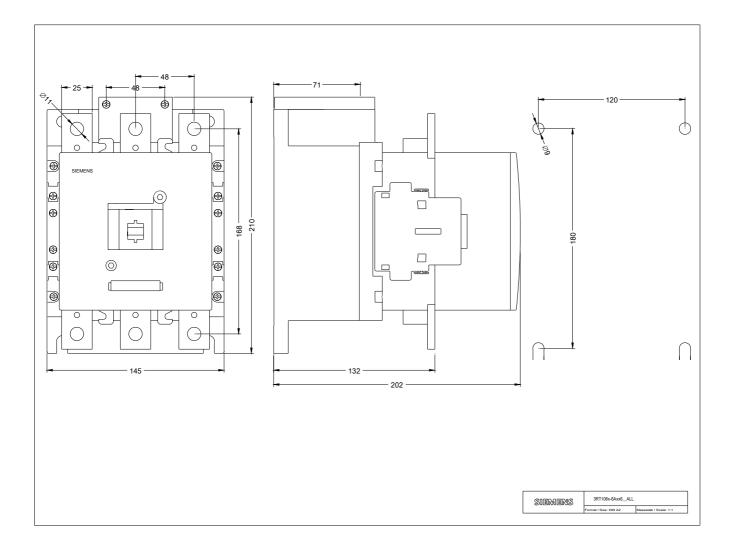

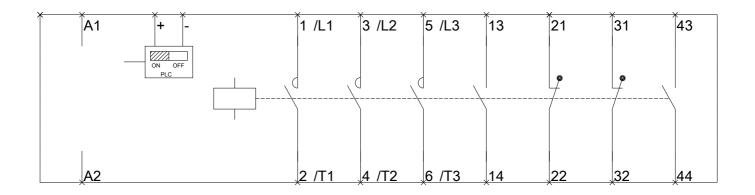

last modified:

07/14/2017