## **SIEMENS**

Data sheet 3RU2116-1DC0



OVERLOAD RELAY 2.2...3.2 A FOR MOTOR PROTECTION SZ S00, CLASS 10, F. MOUNTING ONTO CONTACTOR MAIN CIRCUIT: SPRING TERMINAL AUX. CIRCUIT: SPRING TERMINAL MANUAL-AUTOMATIC-RESET

| Product brand name       | SIRIUS                 |
|--------------------------|------------------------|
| Product designation      | thermal overload relay |
| Product type designation | 3RU2                   |

| Seneral technical data   |       |
|--|-------|
| Size of overload relay   | S00   |
| Size of contactor can be combined company-specific   | S00   |
| Power loss [W] total typical   | 5.2 W |
| Insulation voltage with degree of pollution 3 rated value  | 690 V |
| Surge voltage resistance rated value   | 6 kV  |
| maximum permissible voltage for safe isolation   |       |
| <ul> <li>in networks with grounded star point between<br/>auxiliary and auxiliary circuit</li> </ul> | 440 V |
| <ul> <li>in networks with grounded star point between<br/>auxiliary and auxiliary circuit</li> </ul> | 440 V |
| <ul> <li>in networks with grounded star point between<br/>main and auxiliary circuit</li> </ul>      | 440 V |
| <ul> <li>in networks with grounded star point between<br/>main and auxiliary circuit</li> </ul>      | 440 V |
| Protection class IP  |       |

| • on the front                           | IP20        |
|--|-------------|
| • of the terminal                        | IP20        |
| Type of protection                       | Ex e        |
| Protection against electrical shock      | finger-safe |
| Equipment marking acc. to DIN EN 81346-2 | F           |

| Ambient conditions                   |            |
|--------------------------------------|------------|
| Ambient temperature                  |            |
| <ul><li>during operation</li></ul>   | -40 +70 °C |
| during storage                       | -55 +80 °C |
| <ul> <li>during transport</li> </ul> | -55 +80 °C |
| Temperature compensation             | -40 +60 °C |

| Main circuit                                     |           |
|--|-----------|
| Number of poles for main current circuit         | 3         |
| Adjustable pick-up value current of the current- | 2.2 3.2 A |
| dependent overload release                       |           |
| Operating voltage                                |           |
| • rated value                                    | 690 V     |
| <ul> <li>at AC-3 rated value maximum</li> </ul>  | 690 V     |
| Operating frequency rated value                  | 50 60 Hz  |
| Operating current rated value                    | 3.2 A     |
| Operating power at AC-3                          |           |
| • at 400 V rated value                           | 1.1 kW    |
| • at 500 V rated value                           | 1.5 kW    |
| • at 690 V rated value                           | 2.2 kW    |

| Design of the auxiliary switch                   | integrated                  |
|--|-----------------------------|
|  |                             |
| Number of NC contacts                            |                             |
| <ul> <li>for auxiliary contacts</li> </ul>       | 1                           |
| — Note   | for contactor disconnection |
| Number of NO contacts                            |                             |
| <ul> <li>for auxiliary contacts</li> </ul>       | 1                           |
| — Note   | for message "Tripped"       |
| Number of CO contacts                            |                             |
| <ul> <li>for auxiliary contacts</li> </ul>       | 0                           |
| Operating current of auxiliary contacts at AC-15 |                             |
| ● at 24 V  | 3 A                         |
| • at 110 V                                       | 3 A                         |
| • at 120 V                                       | 3 A                         |
| • at 125 V                                       | 3 A                         |
| • at 230 V                                       | 2 A                         |
| ● at 400 V                                       | 1 A                         |

| Operating current of auxiliary contacts at DC-13     |             |
|--|-------------|
| ● at 24 V  | 2 A         |
| ● at 110 V   | 0.22 A      |
| ● at 125 V   | 0.22 A      |
| ● at 220 V   | 0.11 A      |
| Contact rating of auxiliary contacts according to UL | B600 / R300 |

| Protective and monitoring functions |          |
|-------------------------------------|----------|
| Trip class                          | CLASS 10 |
| Design of the overload release      | thermal  |
|                                     |          |


| UL/CSA ratings                                   |       |
|--|-------|
| Full-load current (FLA) for three-phase AC motor |       |
| • at 480 V rated value                           | 3.2 A |
| • at 600 V rated value                           | 3.2 A |

| nstallation/ mounting/ dimensions            |                 |
|--|-----------------|
| Mounting position                            | any             |
| Mounting type                                | direct mounting |
| Height                                       | 87 mm           |
| Width  | 45 mm           |
| Depth  | 70 mm           |
| Required spacing                             |                 |
| <ul><li>with side-by-side mounting</li></ul> |                 |
| — forwards                                   | 0 mm            |
| — Backwards                                  | 0 mm            |
| — upwards                                    | 6 mm            |
| — downwards                                  | 6 mm            |
| — at the side                                | 6 mm            |
| • for grounded parts                         |                 |
| — forwards                                   | 0 mm            |
| — Backwards                                  | 0 mm            |
| — upwards                                    | 6 mm            |
| — at the side                                | 6 mm            |
| — downwards                                  | 6 mm            |
| • for live parts                             |                 |
| — forwards                                   | 0 mm            |
| — Backwards                                  | 0 mm            |
| — upwards                                    | 6 mm            |
| — downwards                                  | 6 mm            |
| — at the side                                | 6 mm            |

| Connections/Terminals |  |
|-----------------------|--|
| Product function      |  |

| <ul> <li>removable terminal for auxiliary and control circuit</li> </ul> | No                                  |
|--|-------------------------------------|
| Type of electrical connection  |                                     |
| • for main current circuit   | spring-loaded terminals             |
| <ul> <li>for auxiliary and control current circuit</li> </ul>            | spring-loaded terminals             |
| Arrangement of electrical connectors for main current circuit            | Top and bottom                      |
| Type of connectable conductor cross-sections                             |                                     |
| • for main contacts  |                                     |
| <ul> <li>single or multi-stranded</li> </ul>                             | 1x (0,5 4 mm²)                      |
| <ul> <li>finely stranded with core end processing</li> </ul>             | 1x (0.5 2.5 mm²)                    |
| <ul> <li>finely stranded without core end processing</li> </ul>          | 1x (0.5 2.5 mm²)                    |
| <ul> <li>at AWG conductors for main contacts</li> </ul>                  | 1x (20 12)                          |
| Type of connectable conductor cross-sections                             |                                     |
| • for auxiliary contacts   |                                     |
| <ul> <li>single or multi-stranded</li> </ul>                             | 2x (0,5 2,5 mm²)                    |
| <ul> <li>finely stranded with core end processing</li> </ul>             | 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) |
| <ul> <li>finely stranded without core end</li> </ul>                     | 2x (0.5 1.5 mm²)                    |
| processing   |                                     |
| <ul> <li>at AWG conductors for auxiliary contacts</li> </ul>             | 2x (20 14)                          |
| Design of screwdriver shaft  | Diameter 3 mm                       |
| Safety related data  |                                     |
| Failure rate [FIT]   |                                     |
| • with low demand rate acc. to SN 31920                                  | 50 FIT                              |
| MTTF with high demand rate   | 2 280 y                             |
| T1 value for proof test interval or service life acc. to IEC 61508       | 20 y                                |
| Display  |                                     |
| Display version  |                                     |
| • for switching status   | Slide switch                        |
| Certificates/approvals   |                                     |

## **General Product Approval**















**IECE**x

| Decl | aration | of |
|------|---------|----|
| Con  | formity |    |

| lest         |  |
|--------------|--|
| Certificates |  |

Marine / Shipping











Railway



Marine / Shipping

other

Vibration and Shock





Environmental Confirmations

Confirmation

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-1DC0


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2116-1DC0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

 $\underline{\text{https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1DC0}}$ 


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RU2116-1DC0&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RU2116-1DC0&lang=en</a>

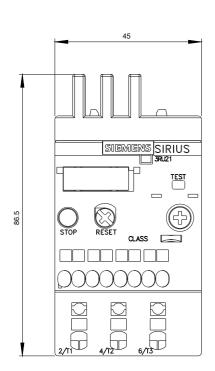

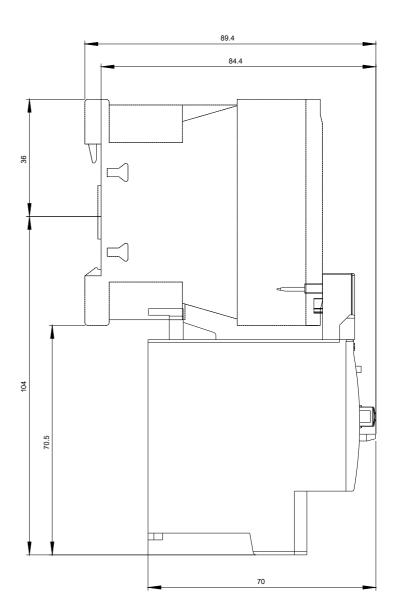

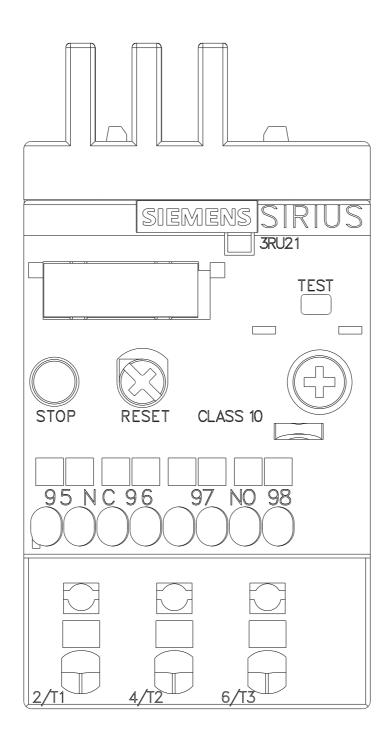

## MEBIERRISA

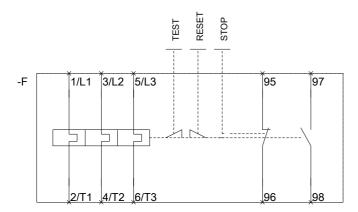

MOTERIFOR

07/17/2017 last modified: