# **SIEMENS**

Data sheet 3RV2321-4BC10

CIRCUIT-BREAKER SZ S0, FOR STARTER COMBINATION, RATED CURRENT 20A, N-RELEASE 260A, SCREW CONNECTION, STANDARD SW. CAPACITY



product brandname	SIRIUS
Product designation	Circuit breaker
Design of the product	For starter combinations
Product type designation	3RV2

General technical data	
Size of the circuit-breaker	S0
Size of contactor can be combined company-specific	S00, S0
Product extension	
Auxiliary switch	Yes
Power loss [W] total typical	8 W
Insulation voltage with degree of pollution 3 rated value	690 V
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
<ul> <li>in networks with grounded star point between main and auxiliary circuit</li> </ul>	400 V
<ul> <li>in networks with grounded star point between main and auxiliary circuit</li> </ul>	400 V
Protection class IP	

• on the front	IP20
of the terminal	IP20
Mechanical service life (switching cycles)	
of the main contacts typical	100 000
of auxiliary contacts typical	100 000
Electrical endurance (switching cycles)	
• typical	100 000
Protection against electrical shock	finger-safe
Equipment marking acc. to DIN EN 81346-2	Q
Ambient conditions	
Ambient temperature	
<ul><li>during operation</li></ul>	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
Main circuit	
Number of poles for main current circuit	3
Operating voltage	
rated value	690 V
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
Operating frequency rated value	50 60 Hz
Operating current rated value	20 A
Operating current	
• at AC-3	
— at 400 V rated value	20 A
Operating power	
• at AC-3	
— at 230 V rated value	5 500 W
— at 400 V rated value	7 500 W
— at 500 V rated value	11 000 W
— at 690 V rated value	15 000 W
Operating frequency	
• at AC-3 maximum	15 1/h
Auxiliary circuit	
Number of NC contacts	
• for auxiliary contacts	0
Number of NO contacts	
• for auxiliary contacts	0
Number of CO contacts	
Number of CO contacts	

Protective and monitoring functions

Product function	
Ground fault detection	No
Phase failure detection	No
Operational short-circuit current breaking capacity	
(Ics) at AC	
● at 240 V rated value	100 kA
● at 400 V rated value	25 kA
● at 500 V rated value	5 kA
• at 690 V rated value	2 kA
Maximum short-circuit current breaking capacity (Icu)	
• at AC at 240 V rated value	100 kA
• at AC at 400 V rated value	55 kA
• at AC at 500 V rated value	10 kA
• at AC at 690 V rated value	4 kA
Breaking capacity short-circuit current (Icn)	
<ul> <li>at 1 current path at DC at 150 V rated value</li> </ul>	10 kA
<ul> <li>with 2 current paths in series at DC at 300 V rated value</li> </ul>	10 kA
<ul> <li>with 3 current paths in series at DC at 450 V rated value</li> </ul>	10 kA
UL/CSA ratings	
Full-load current (FLA) for three-phase AC motor	
• at 480 V rated value	20 A
• at 600 V rated value	20 A
Yielded mechanical performance [hp]	
<ul> <li>for single-phase AC motor</li> </ul>	
— at 110/120 V rated value	1.5 hp
— at 230 V rated value	3 hp
<ul> <li>for three-phase AC motor</li> </ul>	
— at 200/208 V rated value	5 hp
— at 220/230 V rated value	5 hp
— at 460/480 V rated value	10 hp
Short-circuit protection	
Product function Short circuit protection	Yes
Design of the short-circuit trip	magnetic
Design of the fuse link for IT network for short-circuit protection of the main circuit	
● at 400 V	gL/gG 63 A
● at 500 V	gL/gG 50 A
● at 690 V	gL/gG 50 A

Mounting position	any
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail
	according to DIN EN 60715
Height	97 mm
Width	45 mm
Depth	96 mm
Required spacing	
<ul><li>with side-by-side mounting</li></ul>	
— forwards	0 mm
— Backwards	0 mm
— upwards	50 mm
— downwards	50 mm
— at the side	0 mm
• for grounded parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	50 mm
— at the side	30 mm
— downwards	50 mm
• for live parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	50 mm
— downwards	50 mm
— at the side	30 mm
Connections/Terminals	
Product function	
<ul> <li>removable terminal for auxiliary and control circuit</li> </ul>	No
Type of electrical connection	
for main current circuit	screw-type terminals
Arrangement of electrical connectors for main current circuit	Top and bottom
Type of connectable conductor cross-sections	
• for main contacts	
<ul> <li>— single or multi-stranded</li> </ul>	2x (1 2,5 mm²), 2x (2,5 10 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
<ul> <li>at AWG conductors for main contacts</li> </ul>	2x (16 12), 2x (14 8)
Tightening torque	
• for main contacts with screw-type terminals	2 2.5 N⋅m
Design of screwdriver shaft	Diameter 5 to 6 mm

B10 value	
<ul> <li>with high demand rate acc. to SN 31920</li> </ul>	5 000
Proportion of dangerous failures	
<ul> <li>with low demand rate acc. to SN 31920</li> </ul>	50 %
• with high demand rate acc. to SN 31920	50 %
Failure rate [FIT]	
<ul> <li>with low demand rate acc. to SN 31920</li> </ul>	50 FIT
T1 value for proof test interval or service life acc. to IEC 61508	10 y
Display version	
• for switching status	Handle

# Certificates/approvals

# **General Product Approval**

Declaration of Conformity











#### **Test Certificates**

# **Shipping Approval**

Special Test Certificate Type Test
Certificates/Test
Report





KC





# **Shipping Approval**

#### other





Confirmation

Environmental Confirmations



Miscellaneous

# Railway

Vibration and Shock

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)


https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2321-4BC10


#### Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2321-4BC10


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RV2321-4BC10

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2321-4BC10&lang=en">http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2321-4BC10&lang=en</a>

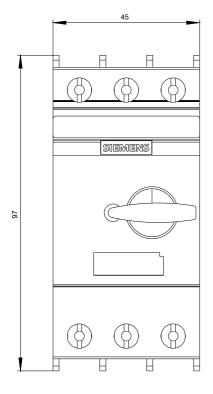

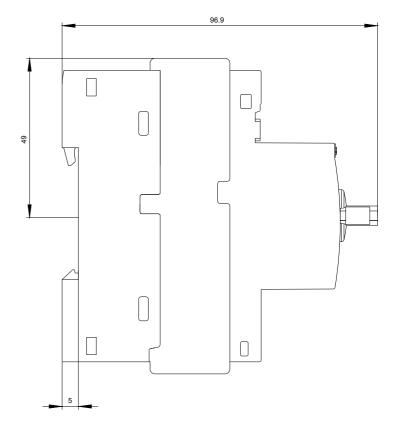

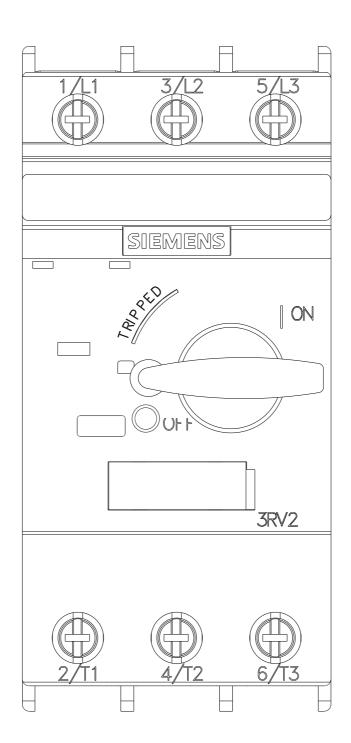

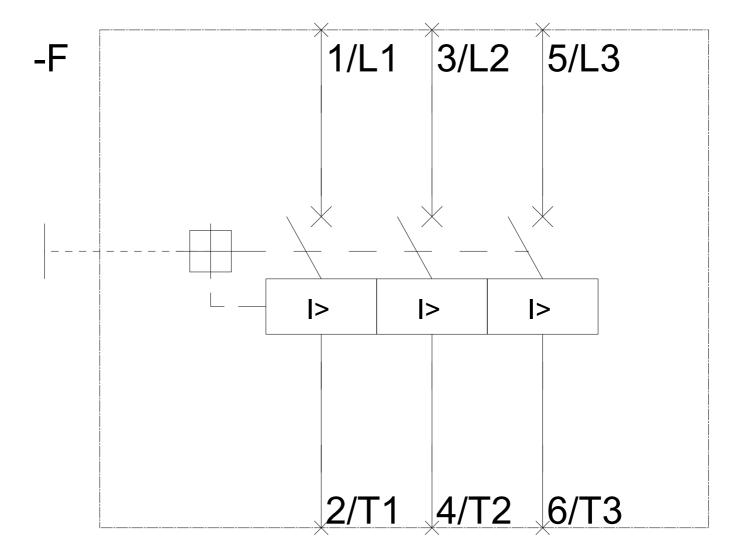

last modified: 06/20/2017