## **SIEMENS**

## Data sheet

## 3RV2321-4NC10

CIRCUIT-BREAKER SZ S0, FOR STARTER COMBINATION, RATED CURRENT 28A, N-RELEASE 364A, SCREW CONNECTION, STANDARD SW. CAPACITY



product brandname	SIRIUS		
Product designation	Circuit breaker		
Design of the product	For starter combinations		
Product type designation	3RV2		
General technical data			
Size of the circuit-breaker	S0		
Size of contactor can be combined company-specific	S00, S0		
Product extension			
<ul> <li>Auxiliary switch</li> </ul>	Yes		
Power loss [W] total typical	11 W		
Insulation voltage with degree of pollution 3 rated value	690 V		
Surge voltage resistance rated value	6 kV		
maximum permissible voltage for safe isolation			
<ul> <li>in networks with grounded star point between main and auxiliary circuit</li> </ul>	400 V		
<ul> <li>in networks with grounded star point between main and auxiliary circuit</li> </ul>	400 ∨		
Protection class IP			

• on the front	IP20
• of the terminal	IP20
Mechanical service life (switching cycles)	
<ul> <li>of the main contacts typical</li> </ul>	100 000
<ul> <li>of auxiliary contacts typical</li> </ul>	100 000
Electrical endurance (switching cycles)	
• typical	100 000
Protection against electrical shock	finger-safe
Equipment marking acc. to DIN EN 81346-2	Q
Ambient conditions	
Ambient temperature	
<ul> <li>during operation</li> </ul>	-20 +60 °C
<ul> <li>during storage</li> </ul>	-50 +80 °C
during transport	-50 +80 °C
Main circuit	
Number of poles for main current circuit	3
Operating voltage	
• rated value	690 V
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
Operating frequency rated value	50 60 Hz
Operating current rated value	28 A
Operating current	
• at AC-3	
— at 400 V rated value	28 A
Operating power	
● at AC-3	
— at 230 V rated value	7 500 W
— at 400 V rated value	11 000 W
— at 500 V rated value	18 500 W
— at 690 V rated value	22 000 W
Operating frequency	
• at AC-3 maximum	15 1/h
Auxiliary circuit	
Number of NC contacts	
<ul> <li>for auxiliary contacts</li> </ul>	0
Number of NO contacts	
• for auxiliary contacts	0
Number of CO contacts	
<ul> <li>for auxiliary contacts</li> </ul>	0
Protective and monitoring functions	

Product function	
<ul> <li>Ground fault detection</li> </ul>	No
<ul> <li>Phase failure detection</li> </ul>	No
Operational short-circuit current breaking capacity (Ics) at AC	
• at 240 V rated value	100 kA
• at 400 V rated value	25 kA
• at 500 V rated value	5 kA
• at 690 V rated value	2 kA
Maximum short-circuit current breaking capacity (Icu)	
• at AC at 240 V rated value	100 kA
• at AC at 400 V rated value	55 kA
• at AC at 500 V rated value	10 kA
• at AC at 690 V rated value	4 kA
Breaking capacity short-circuit current (Icn)	
<ul> <li>at 1 current path at DC at 150 V rated value</li> </ul>	10 kA
<ul> <li>with 2 current paths in series at DC at 300 V rated value</li> </ul>	10 kA
<ul> <li>with 3 current paths in series at DC at 450 V rated value</li> </ul>	10 kA
UL/CSA ratings	
Full-load current (FLA) for three-phase AC motor	
• at 480 V rated value	28 A
• at 600 V rated value	28 A
Yielded mechanical performance [hp]	
<ul> <li>for single-phase AC motor</li> </ul>	
— at 110/120 V rated value	2 hp
— at 230 V rated value	5 hp
<ul> <li>for three-phase AC motor</li> </ul>	
— at 200/208 V rated value	7.5 hp
— at 220/230 V rated value	10 hp
— at 460/480 V rated value	20 hp
Short-circuit protection	
Product function Short circuit protection	Yes
Design of the short-circuit trip	magnetic
Design of the fuse link for IT network for short-circuit	
protection of the main circuit	
• at 400 V	gL/gG 63 A
● at 500 V	gL/gG 63 A
● at 690 V	gL/gG 63 A
Installation/ mounting/ dimensions	

Mounting position	any		
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail		
	according to DIN EN 60715		
Height	97 mm		
Width	45 mm		
Depth	96 mm		
Required spacing			
<ul> <li>with side-by-side mounting</li> </ul>			
— forwards	0 mm		
— Backwards	0 mm		
— upwards	50 mm		
— downwards	50 mm		
— at the side	0 mm		
<ul> <li>for grounded parts</li> </ul>			
— forwards	0 mm		
— Backwards	0 mm		
— upwards	50 mm		
— at the side	30 mm		
— downwards	50 mm		
• for live parts			
— forwards	0 mm		
— Backwards	0 mm		
— upwards	50 mm		
— downwards	50 mm		
— at the side	30 mm		
Connections/Terminals			
Product function			
<ul> <li>removable terminal for auxiliary and control</li> </ul>	No		
Type of electrical connection			
• for main current circuit	screw-type terminals		
Arrangement of electrical connectors for main current circuit	Top and bottom		
Type of connectable conductor cross-sections			
<ul> <li>for main contacts</li> </ul>			
— single or multi-stranded	2x (1 2,5 mm²), 2x (2,5 10 mm²)		
— finely stranded with core end processing	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²		
<ul> <li>at AWG conductors for main contacts</li> </ul>	2x (16 12), 2x (14 8)		
Tightening torque			
<ul> <li>for main contacts with screw-type terminals</li> </ul>	2 2.5 N·m		
Design of screwdriver shaft	Diameter 5 to 6 mm		
Safety related data			

Safety related data

RMRS	Environmer Confirmatic		VDE	Miscellaneous	
	Environmer	ntal Confirmation	~	Miscellaneous	
	outor				
	other				
	ABS	B U R E A U V E R I T A S	LRS	PRS	
Certificate	10 × 00 × 00 × 00 × 00 × 00 × 00 × 00 ×		Lloyd's Register		
Special Test	RICAN BUR	ANU VER		ALE STA	
	Shipping A	Approval			
CSA	UL			EG-Konf.	
SP.		_	FAL	CE	
		кс		Conformity	
proval				Declaration of	
or switching status		Handle			
<ul> <li>with low demand rate acc. to SN 31920</li> <li>with high demand rate acc. to SN 31920</li> <li>Failure rate [FIT]</li> <li>with low demand rate acc. to SN 31920</li> <li>T1 value for proof test interval or service life acc. to IEC 61508</li> </ul>		io y			
		50 %			
		50 %			
failures		-			
<ul> <li>• with high demand rate acc. to SN 31920</li> </ul>		5 000			
	failures ate acc. to SN 3 rate acc. to SN 3 ate acc. to SN 3 terval or service s proval	failures ate acc. to SN 31920 rate acc. to SN 31920 ate acc. to SN 31920 terval or service life acc. to s proval CSA Special Test Certificate	failures     50 %       ate acc. to SN 31920     50 %       ate acc. to SN 31920     50 FIT       terval or service life acc. to     10 y       s     Handle	failures     50 %       ate acc. to SN 31920     50 %       ate acc. to SN 31920     50 FIT       terval or service life acc. to     10 y       s     Handle	

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs


Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2321-4NC10


## Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2321-4NC10


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RV2321-4NC10

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2321-4NC10&lang=en

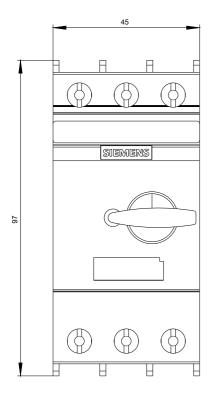

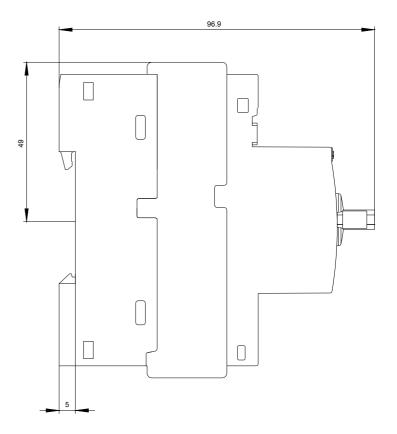

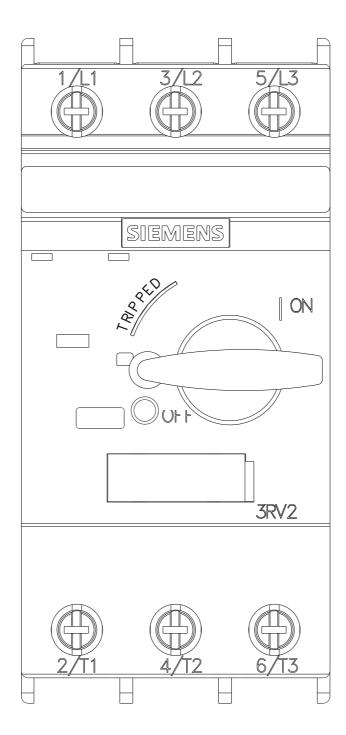

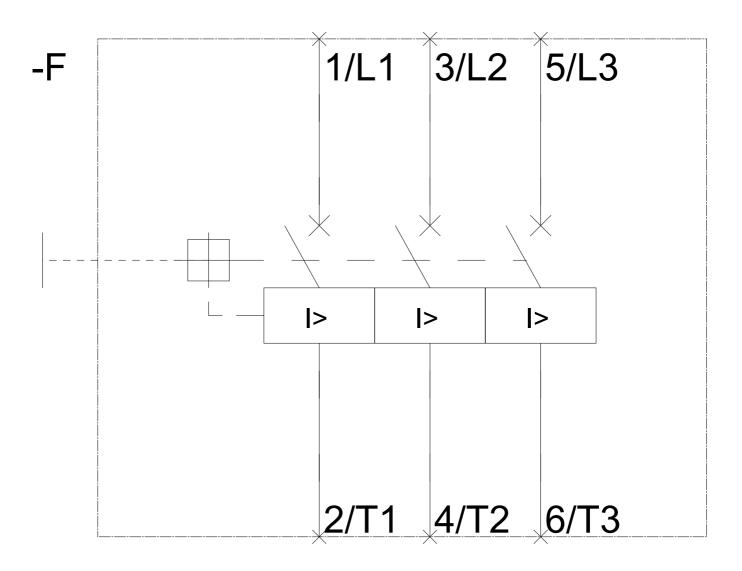

last modified:

06/20/2017