

Base module, for signal tower, asi connection

Powering Business Worldwide

Part no. SL-B-ASI Article no. 222174 Catalog No. SL-B-ASI

Delivery program

Product range	SL signal towers
Single unit/Complete unit	Element
Connection technique	Screw terminal on printed circuit boardconnection to AS-Interface
Description	With cover
Colour	
	Black
Connection to SmartWire-DT	no

Notes

Base module (printed circuit board in base enclosure with 3 outputs):

- Power supply completely from AS-Interface (max. 250 mA) with 2-way screw terminal
- Combination of 3 surface mounting modules with various functions (continuous-, flashing-, strobe light and acoustic indicator)
- Status LEDs
- Order surface mounting modules separately

Technical data General

Connection technique		Screw terminal on printed circuit boardconnection to AS-Interface
Addressing		through AS interface line connection
Maximum total current	mA	≦ ₂₅₀
Power supply		From AS interface line only
Ambient temperature		-25 - 55
Status LEDs on the circuit-board		Status. Output Q0/function module position 1: green Status. Output Q1/function module position 2: green Status. Output Q2/function module position 3: green AS interface power line: green AS interface error, AS interface master failure: red
Profile		S-9.A.E


Design verification as per IEC/EN 61439

Technical data for design verification		
Operating ambient temperature min.	°C	-25
Operating ambient temperature max.	°C	55

Technical data ETIM 6.0

Low-voltage industrial components (EG000017) / Connection module for signal tower (EC001152)				
Electric engineering, automation, process control engineering / Low-voltage switch technology / Command and alarm device / Signal column element, connection module (ecl@ss8.1-27-37-12-32 [AKF050011])				
Connection type auxiliary circuit	Screw connection			
Tube mounting possible	Yes			
Bracket mounting possible	Yes			
Floor mounting possible	Yes			
Colour	Black			
Suitable for AS interface	Yes			

Dimensions

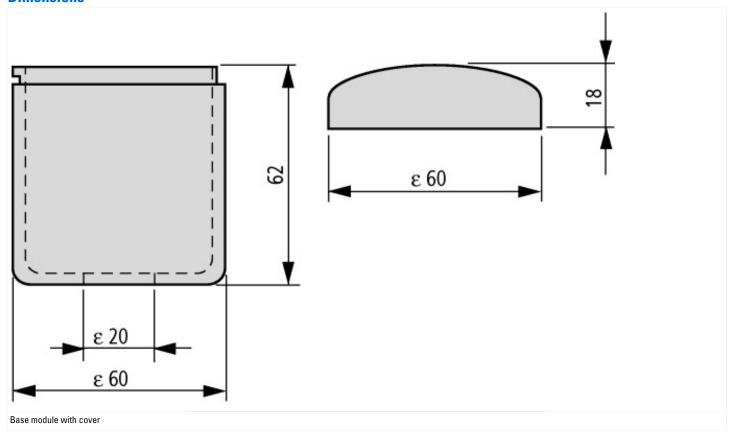

Additional product information (links)

IL04716024Z (AWA1160-1685) Pillar lamps

IL04716024Z (AWA1160-1685) Pillar lamps

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04716024Z2011_02.pdf