



DISTRIBUTION BOARD

# AK 56




## AK 56

Distribution board

**CUSTOMIZABLE**

315 x 750 x 155 mm  
Article number: 73345601

Distribution board - Industrial Quality -, 4 row, 56 modules, 150 mm rail spacing, {integrierte Belüftungselemente zur Verminderung der Kondenswassererbildung}, screwless PE/N terminal rails each with 6 screwable clamping points, 2.5 - 16 mm<sup>2</sup>, 21 / 2 x 14 screwless clamping points 1.5 mm<sup>2</sup> - 4 mm<sup>2</sup>, elastic entries on top, masking and labelling strips, {zusätzlichen Doppelmembranstützen und weiterem Zubehör }

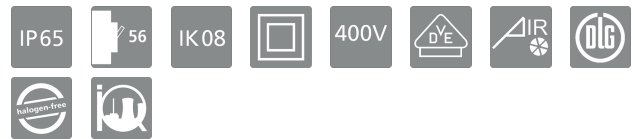

## Technical data

### Measures

Width:	315 mm
Length:	750 mm
Height:	155 mm
Inner height:	95 mm
Inner width:	295 mm

### Material

Base:	Polycarbonate
Cover:	Polycarbonate
Sealing:	Polyurethane
Cover screw:	Polyamide 6, fiber-glass reinforced

## Certificates



### Environmental attributes

Ambient temperature (min.):	-35 °C
Ambient temperature (max.):	80 °C
Ambient temperature (24 h):	60 °C
Max. rel. humidity at 25° C (short Therm):	90%
Max. rel. humidity at 40° C:	50%



---

DISTRIBUTION BOARD

## AK 56

---

### Other attributes

Ingress protection:	IP65 - acc. EN 60529 / DIN VDE 0470-1
Impact resistance:	IK08
Tackable:	Yes
Heavy metals-free:	Yes
PVC-free:	Yes
Silicone-free:	Yes
Color:	grey
Rated insulation voltage AC:	1000 V
Rated insulation voltage DC:	1500 V
sealable:	Yes
Fire protection:	none
Number of distribution units:	14
{EMV-Ausführung}:	No
{mit Schloss}:	No