








MAIN CIRCUIT TERMINALS(INT.AND CONNECTION OF MAIN CIRCUIT: SPRING-LOADED TERMINAL,

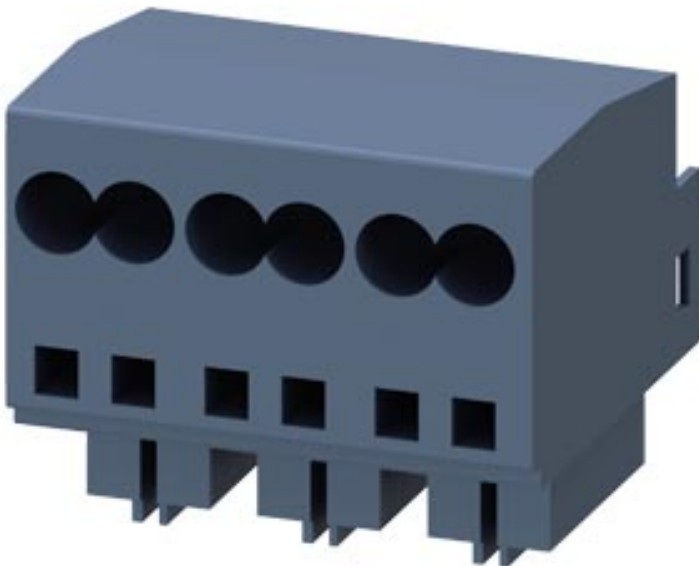

General technical data:		
product brandname		SIRIUS
Product designation		main circuit terminals (ingoing as well as outgoing)
Protection class IP		IP20
Relative humidity during operation	%	10 ... 90
<b>Ambient temperature</b>		
• during transport	°C	-55 ... +80
• during storage	°C	-55 ... +80
• during operation	°C	-20 ... +60
Equipment marking acc. to DIN EN 61346-2		X
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		X
Installation/ mounting/ dimensions:		
Width	mm	45
Height	mm	32
Depth	mm	30
Connections/ Terminals:		
Wire stripping length	mm	10

<b>Type of electrical connection</b> <ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control current circuit</li> </ul>	spring-loaded terminals spring-loaded terminals
<b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>• for main contacts             <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• at AWG conductors for main contacts</li> </ul>	up to 12 A: 2x (1.5 ... 6 mm <sup>2</sup> ), up to 32 A: 2x (2.5 ... 6 mm <sup>2</sup> ) up to 12 A: 2x (1.5 ... 6 mm <sup>2</sup> ), up to 32 A: 2x (2.5 ... 6 mm <sup>2</sup> ) up to 12 A: 2x (16 ... 14), 2x (14 ... 10), 1x 8, up to 32 A: 2x (14 ... 10), 1x 8

#### Certificates/ approvals:



<b>Certificate of suitability</b>	IEC / EN 60947-6-2				
<b>General Product Approval</b>	<b>EMC</b>	<b>Declaration of Conformity</b>	<b>Shipping Approval</b>		
 CSA	 UL		 C-Tick	 EG-Konf.	 BUREAU VERITAS

<b>Shipping Approval</b>	<b>other</b>				
 DNV	 LRS	 PRS	 RINA	 RMRS	<a href="#">Environmental Confirmations</a>

<b>other</b>
<a href="#">Confirmation</a>

#### Further information

- Information- and Downloadcenter (Catalogs, Brochures,...)**  
<http://www.siemens.com/industrial-controls/catalogs>
- Industry Mall (Online ordering system)**  
<http://www.siemens.com/industrymall>
- Cax online generator**  
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RA6920-2A>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**  
<https://support.industry.siemens.com/cs/ww/en/ps/3RA6920-2A>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**  
[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3RA6920-2A&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RA6920-2A&lang=en)

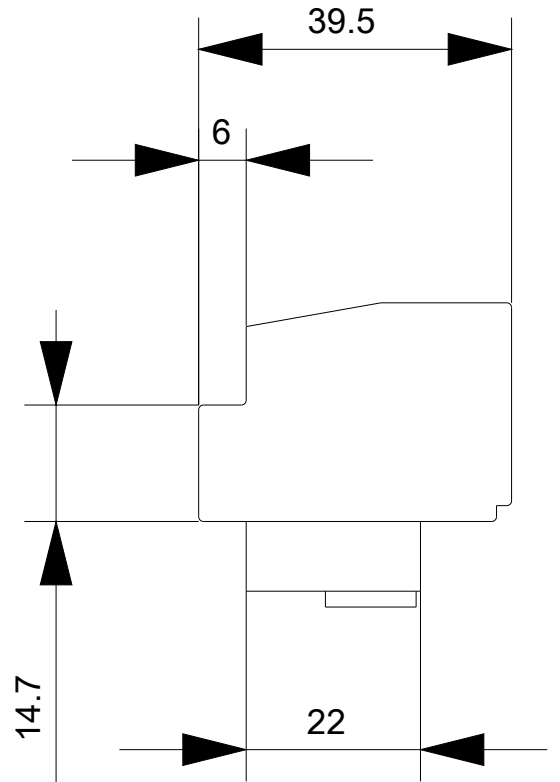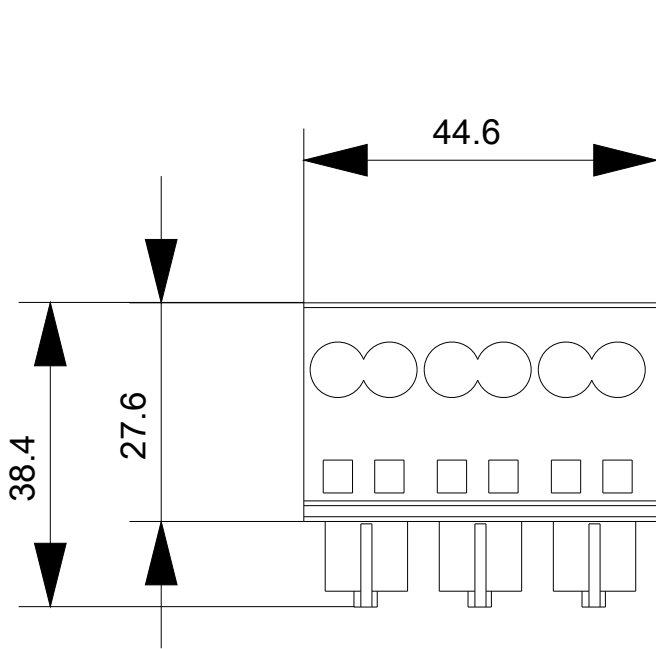

last modified:

07/01/2017