



Data subject to change without notice. Always confirm the data is correct from the seller.

KE 316M Y/R

Side operated polycarbonate switches 16-40A

- Available in grey/black, yellow/red or fireman red
- Good resistance against UV and many chemicals

- Self-extinguishing material and excellent insulating properties
- Fully rated Load Break Switch breaking capacity of 8 x AC23 rating
- Cable entries 2 x M20/M25 as standard on the top and bottom and M20 on the base
- Mounting holes: 118,0 x 84,0
- Padlockable handle in 0-position and also available in 1-position
- Knock-out glands are easy to open
- Large cable terminals 1,5 – 16 mm²
- Tested according to IEC 60947-3
- KE = handle on right side
- KEF = Fireman switch, handle on left side
- **Note!** Al-cables cannot be connected directly to switch terminals. For Al-cable connection please use a bi-metal cable connector, **available here**.

Technical datasheet >>

Accessories




PRODUCT CARD

MORE INFORMATION

PRODUCT DETAILS

SKU	KE 316M Y/R
AC-21 400/415 V (A)	16 A
AC-21 690 V (A)	16 A
AC-22 400/415 V (A)	16 A
AC-22 690 V (A)	16 A
AC-23 400/415 V (A/kW)	16 A / 7.5 kW
AC-23 690 V (A/kW)	16 A / 11 kW
Cable Area to Switch Terminal (mm2) / Bolt size	1.5-16
Color	Yellow / Red
EAN	6419410304129
Enclosure	U2
Enclosure Type	Polycarbonate
IP Rating	66
Number of Poles	3
Operation	Side-operated
Switch type	Load Break Switch
Weight (kg)	0.5

DIMENSIONAL DRAWING

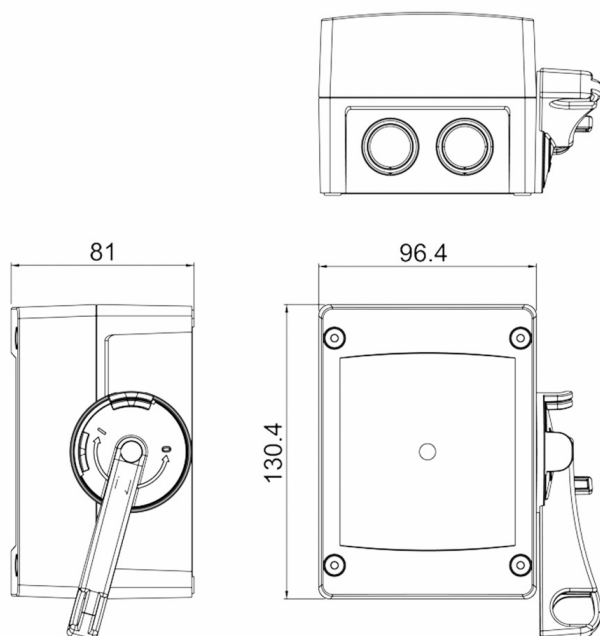

KATKO Oy
Ruosilantie 2
00390 Helsinki, Finland
E-mail: [info\(at\)katko.com](mailto:info(at)katko.com)
Tel: +358 (0)9 849 600

NEWSLETTER

Email

SEND »

[LinkedIn](#) | [YouTube](#)

DOWNLOADS →

[Terms & Conditions](#)