# **Product Environmental Profile**

# PowerTag Acti9









### General information

Representative product

Description of the product

PowerTag Acti9 -A9MEM1541


The PowerTag Acti9 A9MEM1541 consist of: wireless energy meter 3 pole + N to get information about energy consumption on breaker. The dimension is 71x27x42.

### Constituent materials

64 g

Reference product mass

including the product, its packaging and additional elements and accessories

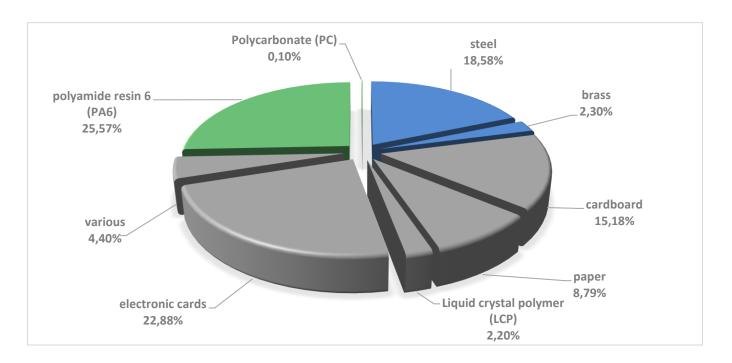

### Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-

# (1) Additional environmental information


	The PowerTag Acti9 presents the following relevent environmental aspects					
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified					
	Weight and volume of the packaging optimized, based on the European Union's packaging directive					
Distribution	Packaging weight is 15 g, consisting of cardboard (63%), Paper (37%)					
	Product distribution optimised by setting up local distribution centres					
Installation	Ref A9MEM1541 does not require any installation operations.					
Use	The product does not require special maintenance operations.					
	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials					
	This product contains 2 Electronic card: - PCB acuisition 9g and PCB Power 5,3g that should be separated from the stream of waste so as to optimize end-of-life treatment.					
End of life	The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website					
	http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page					
	Recyclability potential:33%Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).					

# **C** Environmental impacts

Reference life time	10 years						
Installation elements	No special components needed						
Use scenario	The product have a power use of 0,5 W full time for 10 years						
Geographical representativeness	France						
Technological representativeness	The PowerTag Acti9 A9MEM1541 consist of: wireless energy meter 3 pole + N to get information about energy consumption on breaker. The dimension is 71x27x42.						
	Use	End of life					
Energy model used	Energy model used: France	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU- 27			

#### SCHN-00080-V01.02-EN - PEP ECOPASSPORT® - PowerTag Acti9

Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2,64E-04	2,63E-04	0*	0*	1,18E-06	0*
Contribution to the soil and water acidification	$kg SO_2 eq$	1,98E-01	2,09E-03	3,77E-05	0*	1,96E-01	2,07E-05
Contribution to water eutrophication	kg PO4 <sup>3-</sup> eq	7,90E-03	5,50E-04	8,68E-06	1,07E-06	7,33E-03	7,99E-06
Contribution to global warming	$kg CO_2 eq$	2,73E+01	1,43E+00	8,26E-03	0*	2,59E+01	2,13E-02
Contribution to ozone layer depletion	kg CFC11 eq	6,43E-06	1,48E-07	0*	0*	6,28E-06	1,10E-09
Contribution to photochemical oxidation	$kg \ C_2 H_4 \ eq$	9,51E-03	2,59E-04	2,69E-06	0*	9,24E-03	1,86E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	7,59E-02	8,40E-03	0*	0*	6,75E-02	1,30E-05
Total Primary Energy	MJ	5,47E+02	2,28E+01	1,17E-01	0*	5,24E+02	1,06E-01

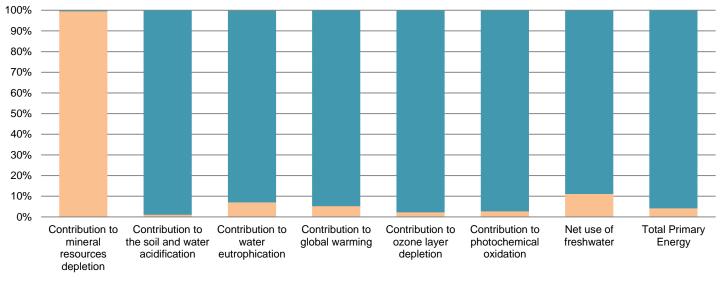

Manufacturing Distribution ■Installation ■Use ■End of life

Optional indicators	PowerTag Acti9 - A9MEM1541			l i i i			
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2,84E+02	1,71E+01	1,16E-01	0*	2,66E+02	8,85E-02
Contribution to air pollution	m³	1,27E+03	1,62E+02	3,51E-01	1,59E-01	1,11E+03	6,58E-01
Contribution to water pollution	m³	1,22E+03	1,31E+02	1,36E+00	1,70E-01	1,09E+03	1,14E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1,50E-03	1,50E-03	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	3,80E+01	5,16E-01	0*	0*	3,75E+01	0*
Total use of non-renewable primary energy resources	MJ	5,09E+02	2,23E+01	1,17E-01	0*	4,86E+02	1,06E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3,77E+01	2,24E-01	0*	0*	3,75E+01	0*
Use of renewable primary energy resources used as raw material	MJ	2,93E-01	2,93E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	5,08E+02	2,17E+01	1,17E-01	0*	4,86E+02	1,06E-01
Use of non renewable primary energy resources used as raw material	MJ	6,22E-01	6,22E-01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life

#### ENVPEP1605012\_v1 - SCHN-00080-V01.02-EN

#### SCHN-00080-V01.02-EN - PEP ECOPASSPORT® - PowerTag Acti9

Hazardous waste disposed	kg	1,95E+00	1,82E+00	0*	3,01E-02	0*	9,77E-02
Non hazardous waste disposed	kg	9,73E+01	5,28E-01	0*	0*	9,67E+01	0*
Radioactive waste disposed	kg	7,90E-02	1,49E-04	0*	0*	7,89E-02	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1,74E-02	1,79E-03	0*	0*	0*	1,56E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
		0,002100	0	0	0	0	0
Materials for energy recovery	kg	5,08E-03	1,18E-04	0*	0*	0*	4,96E-03

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	SCHN-00080-V01.02-EN	Drafting rules	PCR-ed3-EN-2015 04 02				
Verifier accreditation N°	VH08						
Date of issue	05-2016	Information and reference documents	www.pep-ecopassport.org				
		Validity period	5 years				
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010							
Internal External X							
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)							
The elements of the present PEP cannot be compared with elements from another program.							
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »							

Schneider Electric Industries SAS Burklé Franck franck.burkle@schneider-electric.com 03 88 01 62 17 35, rue Joseph Monier CS 30323 F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com

SCHN-00080-V01.02-EN

Published by Schneider Electric

© 2016 - Schneider Electric - All rights reserved

05-2016