

# Product Environmental Profile

## eIFE NW KIT SPARE






## General information

<b>Representative product</b>	eIFE NW KIT SPARE -LV851200SP
<b>Description of the product</b>	<p>Embedded IFE is a gateway module which interfaces ULP protocol to Ethernet based protocols. Embedded IFE shall be an Ethernet gateway to</p> <ul style="list-style-type: none"> <li>• Control</li> <li>• Monitor</li> <li>• Configure</li> </ul> <p>Masterpact range of breaker – Masterpact NT/NW withdrawable with Masterpact MTZ Control Unit</p>
<b>Functional unit</b>	Function of this Gateway Module is to Control, monitor and configure breaker functions, for 20 years.



## Constituent materials

<b>Reference product mass</b>	215 g	including the product, its packaging and additional elements and accessories
-------------------------------	-------	--

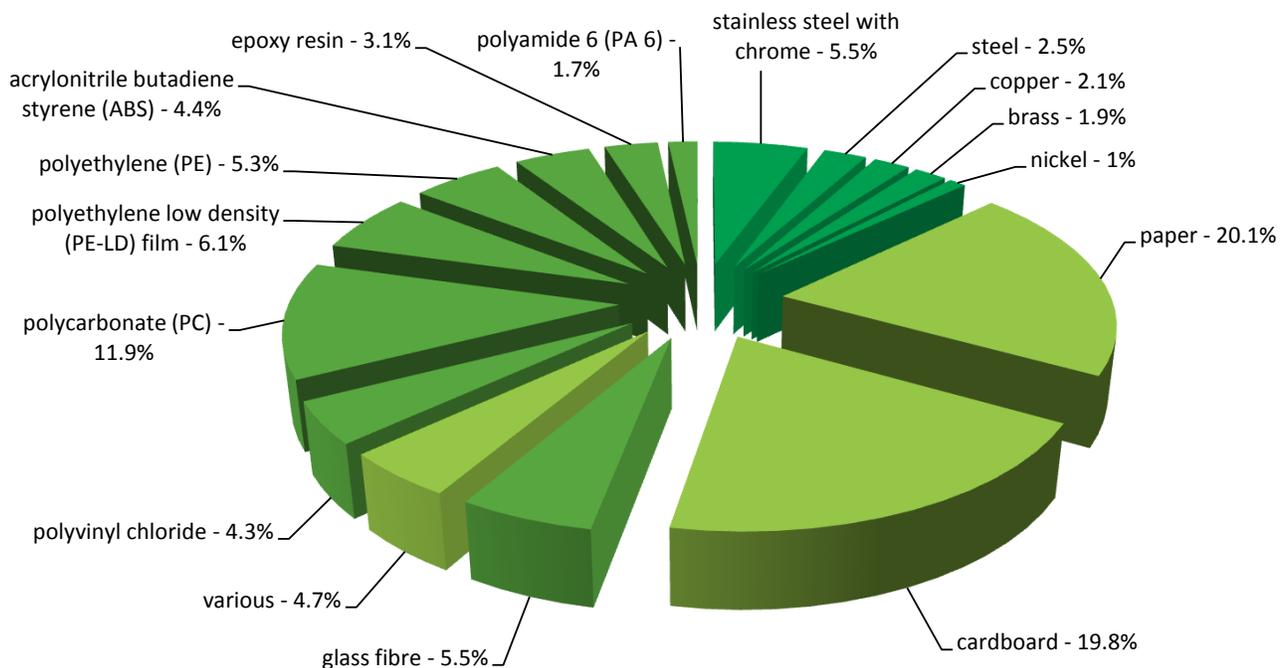

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



## Additional environmental information

The eIFE NW KIT SPARE presents the following relevant environmental aspects


<b>Design</b>	Not in scope
<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 99.5 g, consisting of Cardboard (42.5%), Paper (44.4%) and PE film (13.1%) Product distribution optimised by setting up local distribution centres
<b>Installation</b>	The product does not require special installation procedure and requires little to no energy to install. The disposal of the packaging materials are accounted for during the installation phase (including transport to disposal)
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials  This product contains Electronic components(62.53g) that should be separated from the stream of waste so as to optimize end-of-life treatment.  The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website  <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>  Recyclability potential: <b>13%</b> Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



## Environmental impacts

<b>Reference life time</b>	20 years			
<b>Product category</b>	Passive products - continuous operation			
<b>Installation elements</b>	No special components needed			
<b>Use scenario</b>	Product dissipation is 0.216 W, loading rate is 30% and service uptime percentage is 100%			
<b>Geographical representativeness</b>	Europe			
<b>Technological representativeness</b>	Embedded IFE is a gateway module which interfaces ULP protocol to Ethernet based protocols. Embedded IFE shall be an Ethernet gateway to <ul style="list-style-type: none"> <li>• Control</li> <li>• Monitor</li> <li>• Configure</li> </ul> Masterpact range of breaker – Masterpact NT/NW withdrawable with Masterpact MTZ Control Unit			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: Indonesia	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		eIFE NW KIT SPARE - LV851200SP					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.46E-03	1.46E-03	0*	0*	1.02E-06	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	1.79E-01	9.84E-03	1.27E-04	0*	1.69E-01	5.07E-05
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	8.50E-03	2.01E-03	2.92E-05	1.09E-04	6.33E-03	1.73E-05
Contribution to global warming	kg CO <sub>2</sub> eq	2.73E+01	4.84E+00	2.77E-02	7.34E-02	2.23E+01	4.71E-02
Contribution to ozone layer depletion	kg CFC11 eq	5.99E-06	5.64E-07	0*	0*	5.43E-06	2.37E-09
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	8.89E-03	8.80E-04	9.04E-06	6.40E-06	7.99E-03	5.24E-06
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m <sup>3</sup>	1.13E-01	5.46E-02	0*	5.03E-05	5.83E-02	4.07E-05
Total Primary Energy	MJ	5.26E+02	7.30E+01	3.92E-01	0*	4.53E+02	3.31E-01

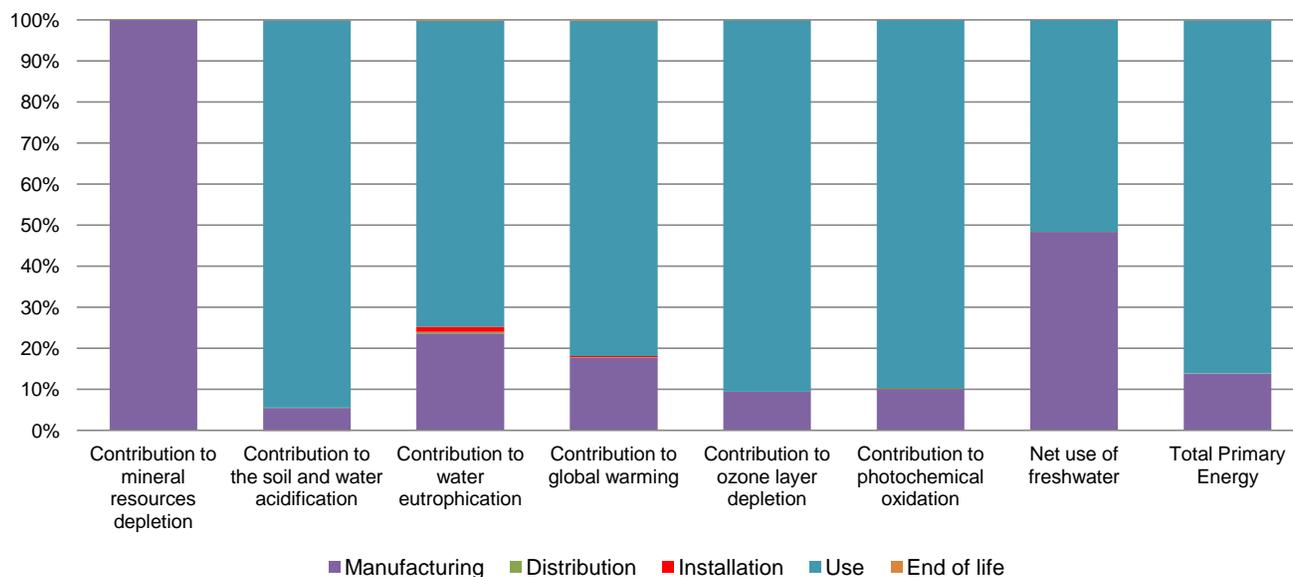

Optional indicators		eIFE NW KIT SPARE - LV851200SP					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	2.87E+02	5.64E+01	3.90E-01	0*	2.30E+02	2.47E-01
Contribution to air pollution	m <sup>3</sup>	1.42E+03	4.55E+02	1.18E+00	0*	9.58E+02	1.86E+00
Contribution to water pollution	m <sup>3</sup>	1.53E+03	5.61E+02	4.56E+00	2.24E+00	9.38E+02	2.88E+01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	4.11E-02	4.11E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	3.50E+01	2.66E+00	0*	0*	3.24E+01	0*
Total use of non-renewable primary energy resources	MJ	4.91E+02	7.04E+01	3.92E-01	0*	4.20E+02	3.30E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3.41E+01	1.78E+00	0*	0*	3.24E+01	0*

Use of renewable primary energy resources used as raw material	MJ	8.72E-01	8.72E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	4.88E+02	6.74E+01	3.92E-01	0*	4.20E+02	3.30E-01
Use of non renewable primary energy resources used as raw material	MJ	2.98E+00	2.98E+00	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
<b>Waste categories</b>	<b>Unit</b>	<b>Total</b>	<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use</b>	<b>End of Life</b>
Hazardous waste disposed	kg	3.95E+00	3.70E+00	0*	0*	0*	2.53E-01
Non hazardous waste disposed	kg	8.60E+01	2.43E+00	0*	0*	8.36E+01	0*
Radioactive waste disposed	kg	6.88E-02	7.15E-04	0*	0*	6.81E-02	0*
<b>Other environmental information</b>	<b>Unit</b>	<b>Total</b>	<b>Manufacturing</b>	<b>Distribution</b>	<b>Installation</b>	<b>Use</b>	<b>End of Life</b>
Materials for recycling	kg	1.65E-02	1.71E-03	0*	0*	0*	1.48E-02
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	1.73E-02	1.76E-04	0*	1.30E-02	0*	4.09E-03
Exported Energy	MJ	5.73E-04	0*	0*	5.73E-04	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	SCHN-00097-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH25	Supplemented by	PSR0005-ed2-EN-2016_03_29
Date of issue	08/2016	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	External	X	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN).			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			
Environmental data in alignment with EN 15804 : 2012 + A1 : 2013			



Schneider Electric Industries SAS  
 CATHERINE COLIN  
 catherine.colin@fr.schneider-electric.com

35, rue Joseph Monier  
 CS 30323  
 F- 92506 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

SCHN-00097-V01.01-EN

© 2015 - Schneider Electric – All rights reserved

08/2016