


Pigtail_Fiberhaler

The fiber pigtail is a single, short, fiber optic cable with a factory-installed connector on one end, and un-terminated fiber on the other end. Fiber optic pigtails are used to terminated fiber optic cables via fusion splicing or mechanical splicing



The pigtail's fiber optic core diameter is 9/125 (Single Mode). Available with LC and SC connector with UPC or APC polishing method.



Products Materials

High Quality Connector meet, compatible with many International Standard				
SC: TIA/EIA, FOCIS3, GR-326. NTT-SC IEC61754-4 and JIS C5973.		LC: TIA/EIA, FOCIS10, GR-326 EIA/TIA-604-10, IE- C61754-20 and JIS C5973.		

Polishing Method

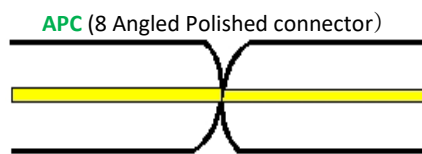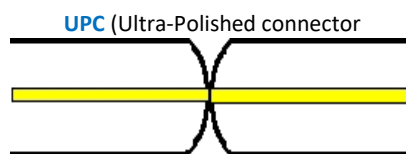

Optical Specifications

Insertion loss (1310 / 1550nm)	≤0.2dB (Mean) ≤0.3dB (max)	Interchangeability	≤0.2dB
Return loss	APC≥60dB UPC≥50dB	Repeatability	≤0.1dB
Operating temperature	-40~70°C	Durability	≤0.2dB typical change, 1000 matings

Ordering information

Artikkel nr	Description
SC	4870 Pigtail G-657A2 SM SC/UPC simplex 1m, 900µm LSZH gul easy streep
	4875 Pigtail G-657A2 SM SC/UPC duplex 1m, 900µm LSZH gul easy streep
	4871 Pigtail G-657A2 SM SC/APC simplex 1m 900µm LSZH gul easy streep
	4876 Pigtail G-657A2 SM SC/APC duplex 1m 900µm LSZH gul easy streep
	4867 Pigtail G-657A2 SM SC/UPC simplex 12x1m, 900µm LSZH gul easy streep
	4866 Pigtail G-657A2 SM SC/UPC simplex 12x1m m/farger, 900µm LSZH easy streep
LC	4872 Pigtail G-657A2 SM LC/UPC simplex 1m, 900µm LSZH gul easy streep
	4877 Pigtail G-657A2 SM LC/UPC duplex 1m, 900µm LSZH gul easy streep