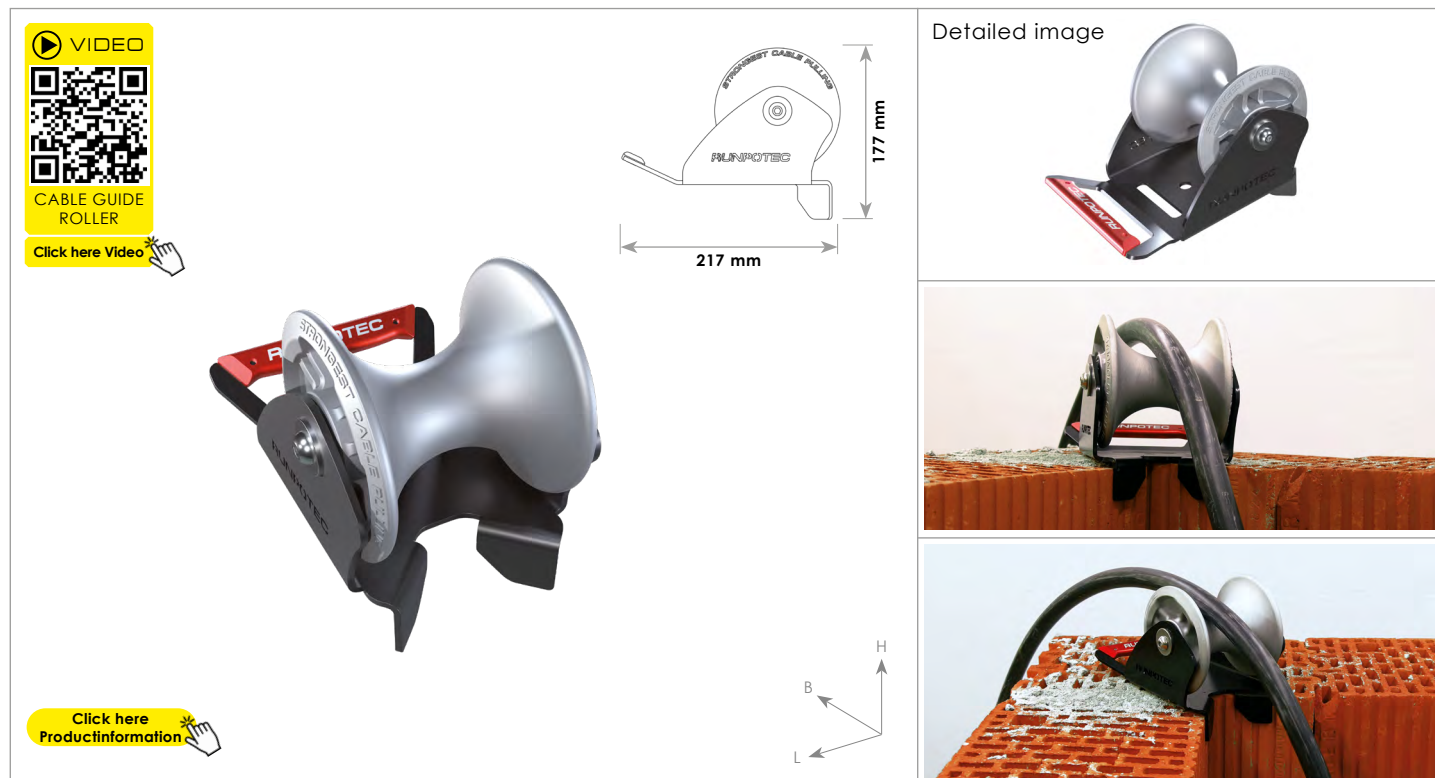


CABLE GUIDE ROLLER - Shaft inside edge

for shafts, shoulders or steps - roller diameter Ø 130 mm

Item no.: **10156****DATA**

ITEM NO	10156
DIMENSIONS	L 230 x W 155 x H 165 mm
LOAD BEARING CAPACITY	4.500 kg
WEIGHT	3,14 kg
MATERIAL	Roller: Aluminium Frame: Steel
ROLLER DIAMETER	Ø 130 mm
MAX CABLE DIAMETER	Ø 100 mm
EAN-Code	9120045476378

DESCRIPTION

The cable guide roller - shaft inside edge is ideally suited for mounting on the edge of a shaft or on steps to pull cables gently around corners with the least possible resistance. A right-angled stop is provided by the two lugs. It can be secured in place with a belt or screws via the assembly opening. The lightweight and highly robust design reduces the effort required with optimum success. The high-quality die-cast aluminium rollers with integrated ball bearing and the sturdy powder-coated steel frame guarantee a long service life. Ergonomic aluminium handle - Load capacity 4500 kg.

Optimum area of application: for mounting on the edge of a shaft or on steps to pull cables gently around corners.

Application video: a short, very informative application video can be viewed by scanning the QR code or on www.runpotec.com.

Scope of delivery: 1 x Cable guide roller - shaft inside edge

ADVANTAGES

- Aluminium heavy-duty rollers with stainless steel ball bearings
- Robust metal frame
- CDP and powder coated
- Ergonomic aluminium carrying handle
- Load bearing capacity 4.500 kg

INFORMATION**Optional accessories:****POLYESTER PULLING ROPE incl. reel**

- Rope: Ø 10 mm
 Item no: 10167 - 120 m
 Item no: 10168 - 200 m
 Rope: Ø 12 mm
 Item no: 10120 - 150 m
 Item no: 10121 - 200 m
 Item no: 10122 - 300 m
 Item no: 10123 - 350 m

**Related pulling system:****CW 800 E Capstan winch + trolley**

Item no: 10138

