


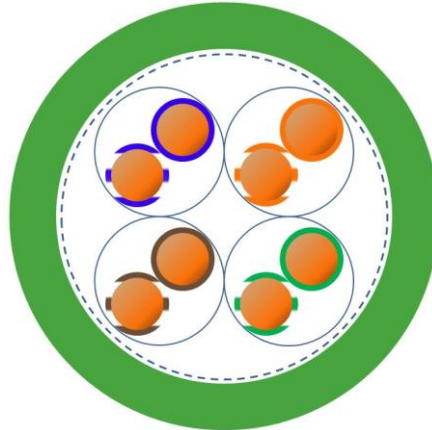
2170464	DATA SHEET	
valid from: 01.01.2019	ETHERLINE® Y PiMF CAT.6A 4 x 2 x AWG22/1	

Application

ETHERLINE® Y PiMF CAT.6A (bandwidth up to 500 MHz), has a performance for the cabling class “EA” and a maximum transfer rate (IEEE 802.3) of 10 GBit/s to 100m. The electrical parameter of the cable with a nominal impedance of 100 Ω and excellent shielding Properties (pair and total screen) are normatively specified to IEC 61156-5.

It is provided for industrial secondary and tertiary cable according to EN 50173-3 ISO/IEC 24702. Other applications are Profinet with 4 Pairs, EtherCAT, EtherNet/IP, Power over Ethernet (IEEE’s 802.3af) and Power over Ethernet Plus (802.3at). The product is flame retardant has a moderate oil resistant and comes in rough industrial environments for use. It is suitable for fixed installation and serves to wiring of machines, tools , devices , appliances and control cabinets.

Design




Conductor	solid bare copper AWG 22/1, approx. 0,643 mm
Insulation	foamed skin polyethylene (02YS), Ø 1,50 mm (nom. Value), Ø 1,60 mm (max. value)
Core identification code	white-blue/blue, white-orange/orange, white-green/green, white-brown/brown
Stranding	4 couples with shield foil to the soul
Screen	braid of tinned copper wires, coverage 85 % ±5 %
Taping	(optional) thin non-woven tape
Outer sheath	PVC compound, green (similar RAL 6018), outer Ø: 8,70 mm ± 0,30 mm

Electrical properties at 20°C

Conductor resistance	max. 57,1 Ω/km
Specific volume resistivity	min. 5 GΩxkm
Inductance	nom. 850 µH/km (1 kHz)
Characteristic impedance	100 Ω (±5%) at 100 MHz
Velocity of propagation	nom. 0,80
Signal transit time	nom. 420 ns/100m
Peak operating voltage	125 V
Test voltage	Ader/Ader: 1000 V DC/min oder 2500 V DC/2sec Ader/Schirm: 700 V AC/min oder 1700 V AC/2sec

Creator: TOST / PDC	Document: DB2170464EN	Page 1 of 2
Released: ALTE / PDC	Version: 03	

2170464	DATA SHEET	
valid from: 01.01.2019	ETHERLINE® Y PiMF CAT.6A 4 x 2 x AWG22/1	

Electrical transmission properties at 20°C

f [MHz]	Attenuation [dB/100m] standard	NEXT [dB] standard	EL FEXT [dB] standard	Return Loss [dB] standard
4	3,8	66,3	56	23
10	6,5	59,4	46,8	25
16	7,6	57,4	44,1	25
31,25	10,4	53	39	23,6
62,5	14,9	48,4	32,1	21,6
100	19,4	45,1	27,9	20,1
200	27,6	40,7	22	18
250	31,1	39,3	20	17,3
300	34,2	38,2	18,5	17,3
350	37,2	37,1	17,1	17,3
500	45,3	34,8	14	17,3

Mechanical and thermal properties

Minimum bending radius	fixed installation: 10 x outside diameter cable
Temperature range	fixed installation: -30°C up to +80°C
Flammability	acc. to IEC 60332-3-25
General requirements	This cable is conform to the EU-Directive 2011/65/EU (RoHS, Restriction of the use of certain hazardous substances).

Creator: TOST / PDC	Document: DB2170464EN	Page 2 of 2
Released: ALTE / PDC	Version: 03	