


Product Description

Reliable bending and antikink protection; High strain relief; Robust; For cables with large outer diameters; High degree of protection

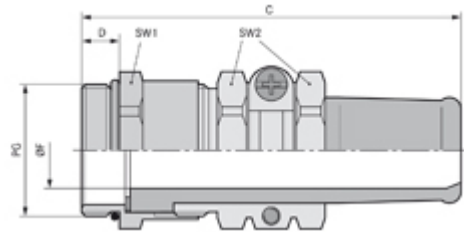

Application range

- Cables for electrical appliances and machinery, which are moved under normal use, must be protected against excessive bending, as required in accordance with VDE 0730.
- Hand-held equipment
- movable machinery
- Building sites
- Flexing machine parts

Benefits

- Reliable bending and antikink protection
- High strain relief
- Robust
- For cables with large outer diameters
- High degree of protection

Design

- PG connection thread

Note

- Counter nut to be used SKINDICHT® SM
- EMC type please see SKINDICHT® SRE



Technical Data

Caution

Installation dimensions see Appendix T21

On request

Available with long connection thread

Material

Body: Nickel plated brass
O-ring: NBR Antikink
protection: CR

Degree of protection

IP 65

Range of temperature

-20°C up to +80°C

Article List

| Part number | Part designation / size | Clamping range ØF mm | Max. fitting size for installation in mm | SW1 / SW2 mm | Overall length C mm | Thread length D mm | Pieces / PU |
|---------------|-------------------------|----------------------|--|--------------|---------------------|--------------------|-------------|
| SKINDICHT® SR | | | | | | | |
| 52000990 | SR 07/05 | 3,5 - 5 | 23 | 14 / 15 | 50 | 5 | 50 |
| 52001000 | SR 09/07 | 5,5 - 7 | 25 | 17 / 17 | 52 | 6 | 50 |
| 52001010 | SR 11/07 | 5,5 - 7 | 28 | 20 / 20 | 56 | 6 | 25 |
| 52001020 | SR 11/09 | 7,5 - 9 | 28 | 20 / 20 | 56 | 6 | 25 |
| 52001030 | SR 13/09 | 7,5 - 9 | 32 | 22 / 22 | 62 | 6.5 | 25 |
| 52001040 | SR 13/11 | 9 - 11 | 32 | 22 / 22 | 62 | 6.5 | 25 |
| 52001050 | SR 13/13 | 11 - 13 | 32 | 22 / 22 | 62 | 6.5 | 25 |
| 52001060 | SR 16/13 | 11,5 - 13 | 35 | 24 / 24 | 67 | 6.5 | 25 |
| 52001070 | SR 16/15 | 13 - 15 | 35 | 24 / 24 | 67 | 6.5 | 25 |
| 52001080 | SR 21/15 | 13,5 - 15 | 46 | 30 / 30 | 79 | 7 | 25 |
| 52001090 | SR 21/17 | 15 - 17 | 46 | 30 / 30 | 79 | 7 | 25 |
| 52001100 | SR 21/19 | 17 - 19 | 46 | 30 / 30 | 79 | 7 | 25 |
| 52001110 | SR 21/20 | 18 - 20 | 46 | 30 / 30 | 79 | 7 | 25 |
| 52001120 | SR 29/20 | 18 - 20 | 59 | 40 / 41 | 91 | 8 | 10 |
| 52001130 | SR 29/23 | 21 - 23 | 59 | 40 / 41 | 91 | 8 | 10 |
| 52001140 | SR 29/25 | 23 - 25 | 59 | 40 / 41 | 91 | 8 | 10 |
| 52001150 | SR 36/26 | 23 - 26 | 70 | 50 / 50 | 110 | 9 | 5 |
| 52001160 | SR 36/30 | 27 - 30 | 70 | 50 / 50 | 110 | 9 | 5 |
| 52001170 | SR 36/33 | 30 - 33 | 70 | 50 / 50 | 110 | 9 | 5 |
| 52001180 | SR 36/35 | 32 - 35 | 70 | 50 / 50 | 110 | 9 | 5 |
| 52001190 | SR 42/35 | 32 - 35 | 75 | 57 / 57 | 114 | 10 | 5 |



| | | | | | | | |
|----------|----------|---------|----|---------|-----|----|---|
| 52001200 | SR 42/38 | 35 - 38 | 75 | 57 / 57 | 114 | 10 | 5 |
| 52001210 | SR 42/40 | 36 - 40 | 75 | 57 / 57 | 114 | 10 | 5 |
| 52001220 | SR 48/40 | 36 - 40 | 83 | 64 / 64 | 119 | 10 | 1 |
| 52001230 | SR 48/44 | 40 - 44 | 83 | 64 / 64 | 119 | 10 | 1 |

Footnote:

Photographs are not to scale and do not represent detailed images of the respective products.